




40X40X20mm




General Specifications

Airflow	5.42~11.36 CFM
Static Pressure	2.21~10.12 mm-H ₂ O
Housing	Plastic Material UL 94V-0 P.B.T.
Blade	Plastic Material UL 94V-0 P.B.T.
Lead Wire	UL1061 #26 AWG

Dimensions:mm

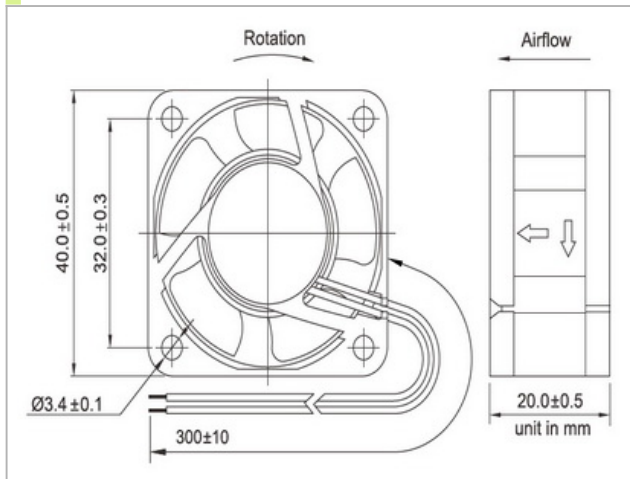

Performance

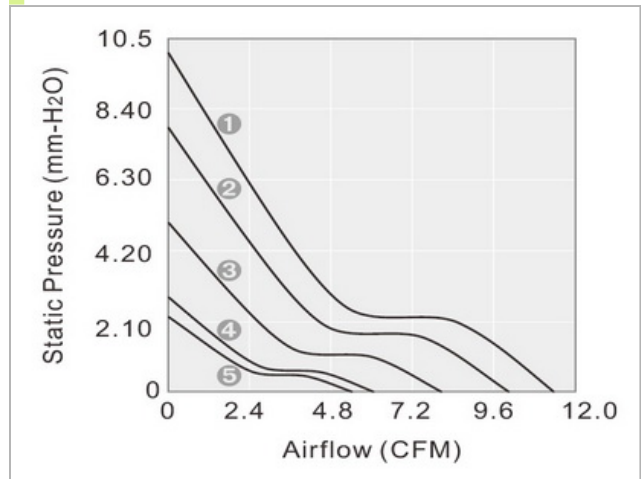

Specifications

Model NO.	Bearing	Rated Voltage VDC	Operating Voltage Range VDC	Speed RPM	Airflow CFM	Static Pressure mm-H ₂ O	Current mA	Power W	Life at 40°C L10 HOUR	P-Q Curve	Noise dBA	Weight g
GD054020LL-N	Sintetico	5	4~5.5	4500	6.08	2.81	60	0.30	50000	4	<17	26.9
GD054020ML-N	Sintetico	5	4~5.5	6000	8.06	5.02	100	0.50	50000	3	22.0	26.9
GD054020HL-N	Sintetico	5	4~5.5	7500	10.04	7.87	170	0.85	50000	2	26.5	26.9
GD054020EB-N	2BALL	5	4~5.5	8500	11.36	10.12	210	1.05	65000	1	29.5	26.9
GD124020LL-N	Sintetico	12	7~13.2	4000	5.42	2.21	30	0.36	50000	5	<17	26.9
GD124020LL-N	Sintetico	12	7~13.2	4500	6.08	2.81	40	0.48	50000	4	<17	26.9
GD124020ML-N	Sintetico	12	7~13.2	6000	8.06	5.02	60	0.72	50000	3	22.0	26.9
GD124020HL-N	Sintetico	12	7~13.2	7500	10.04	7.87	110	1.32	50000	2	26.5	26.9
GD124020EB-N	2BALL	12	7~13.2	8500	11.36	10.12	140	1.68	65000	1	29.5	26.9
GD244020LL-N	Sintetico	24	12~26.4	4500	6.08	2.81	30	0.72	50000	4	<17	26.9
GD244020ML-N	Sintetico	24	12~26.4	6000	8.06	5.02	45	1.08	50000	3	22.0	26.9
GD244020HL-N	Sintetico	24	12~26.4	7500	10.04	7.87	60	1.44	50000	2	26.5	26.9
GD244020EB-N	2BALL	24	12~26.4	8500	11.36	10.12	85	2.04	65000	1	29.5	26.9