

Part No. - PY3W-H-PW6C-G




Features -

- Highest Flux Pure Green
- High reliability and Very long operating life (up to 100K hours)
- Low voltage DC operated
- More Energy Efficient than Incandescent and most Halogen lamps
- NO UV
- Superior ESD protection


Typical Applications -

- Decorative
- Portable(flashlight,bicycle)
- Automotive Exterior(Stop-Tail-Turn, CHMSL,Mirror Side Repeat)
-

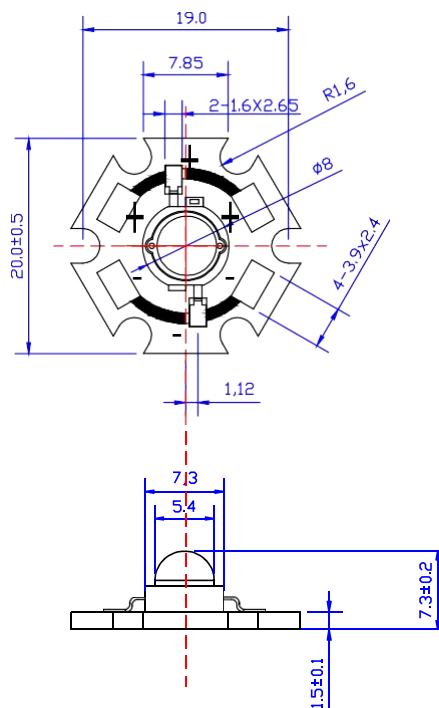

NOTE:

- All dimensions are millimetres.
- Tolerance is ± 0.1 mm unless otherwise noted

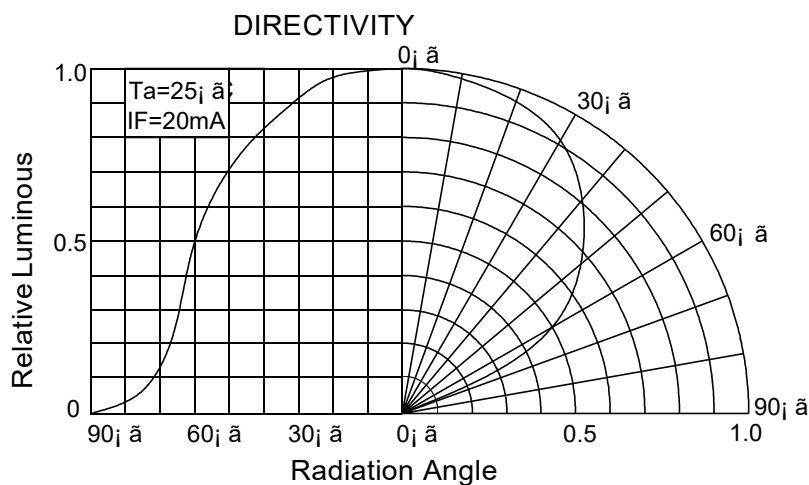

Absolute maximum ratings $\Delta T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Condition	Value		Unit
			Min.	Max.	
DC Forward Current	I_F	----	500	700	mA
Peak Pulse Current	I_{peak}	Duty=0.1mS * 1kHz	----	500	mA
Power Dissipation	P_d	----	----	1.4	W
LED Junction Temperature	T_j	----		120	$^\circ\text{C}$
Operating Temperature	T_{opr}	----	-25	+100	$^\circ\text{C}$
Storage Temperature	T_{str}	----	-40	+120	$^\circ\text{C}$
ESD Sensitivity	---	HBM	8000	---	V
Soldering Temperature	---	-----	260 $^\circ\text{C}$ for 5 Seconds max		

Electrical and optical characteristics $\Delta T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Condition	Value			Unit
			Min.	Typ.	Max.	
Forward Voltage	V_F	$I_F = 650\text{mA}$	----	3.3	3.5	V
Luminous Flux	Φ_v	$I_F = 650\text{mA}$	120	155	160	lm
Viewing Angle	$2\theta_{1/2}$	$I_F = 650\text{mA}$	----	120	----	Deg.
Dominant Wavelength	λ_d	$I_F = 650\text{mA}$	520	----	530	nm

Luminous Flux Bins $\Delta T_a = 25^\circ\text{C}$

Unit: lm

Bin	B	C	D	E	F	G
Min	5	10	15	20	25	30
Max	10	15	20	25	30	40

Dominant Wavelength- λ_d $\Delta T_a = 25^\circ\text{C}$

Unit: nm

Bin	B	M	P	N		
Min	500	510	520	530		
Max	510	520	530	540		



DONGGUAN CITY PENG YUAN OPTOELECTRONICS TECHNOLOGY CO LTD