


AD4010 SERIES



External Dimensions

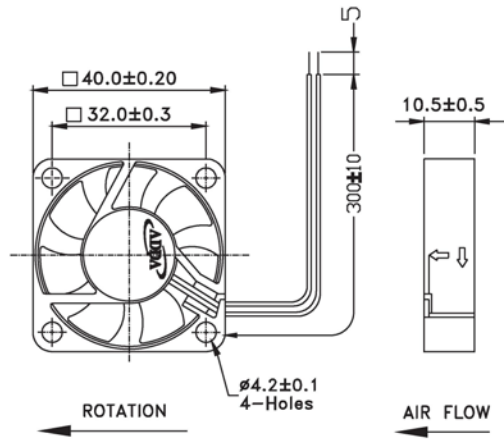


Frame: Plastic (UL: 94V-0)
 Impeller: Plastic (UL: 94V-0)
 Bearing: Ball, Sleeve, 1B1S, Hydro bearing
 Lead wire: UL1007AWG26
 VOLTAGE AVAILABLE: 5V, 12V, 24V

Specifications (Nominal)

*Noise is measured at the distance of one (1) meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
40x40x10	AD0405LB-G70	☉ ☉ ○ ●	5	0.07	0.35	4200	0.132	4.70	0.061	1.52	14.0	17.0
	AD0405MB-G70	☉ ☉ ○ ●	5	0.11	0.55	4800	0.161	5.70	0.078	1.98	20.0	
	AD0405HB-G70	☉ ☉ ○ ●	5	0.16	0.80	6000	0.189	6.70	0.102	2.54	25.0	
	AD0412LB-G70	☉ ☉ ○ ●	12	0.06	0.72	4200	0.132	4.70	0.061	1.52	14.0	
	AD0412MB-G70	☉ ☉ ○ ●	12	0.06	0.72	4800	0.161	5.70	0.078	1.98	20.0	
	AD0412HB-G70	☉ ☉ ○ ●	12	0.09	1.08	6000	0.189	6.70	0.102	2.54	25.0	
	AD0424LB-G70	☉ ☉ ○ ●	24	0.03	0.72	4200	0.132	4.70	0.061	1.52	14.0	
	AD0424MB-G70	☉ ☉ ○ ●	24	0.04	0.96	4800	0.161	5.70	0.078	1.98	20.0	
	AD0424HB-G70	☉ ☉ ○ ●	24	0.06	1.44	6000	0.189	6.70	0.102	2.54	25.0	

Specifications subject to change without notice.

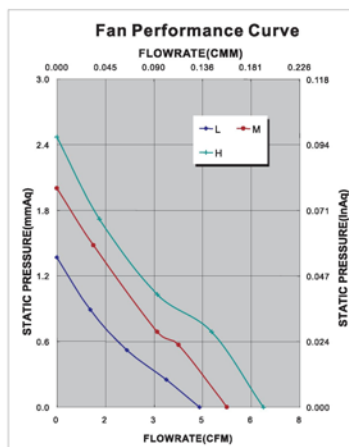

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓		✓					✓

*Safety approvals

UL	cUL	SP	BSI	CE
✓	✓		✓	✓