



### SIDE VIEW

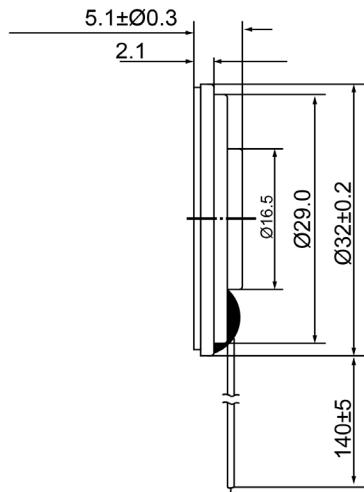

### BOTTOM VIEW

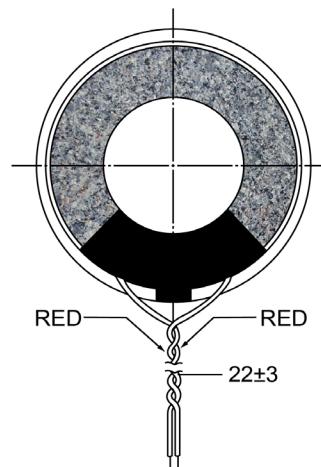

### Specifications

Description	Value	Unit
Shape	Round	
Resonant Frequency	280	(Hz)
Frequency Range	280 ~ 20,000	(Hz)
SPL @ 10cm	94	(dBA)
Impedance	8	(Ohm)
Cone Material	Mylar	
Nominal Power	0.5	(W)
Max Power	0.8	(W)
Mount Type	Flush Mount	
Operating Temperature	-40 ~ +66	°C
Storage Temperature	-40 ~ +66	°C
Weight	8.3	(g)

### Notes

1) All dimensions are in mm unless otherwise noted  
2) All parts meet RoHS



DB UNLIMITED

Dynamic Speaker

Version	Description			Date	Approved
1	Released from Engineering			10/21/2013	J.S
Drawn by	Date	Checked by	Date	Approved by	Date
A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013

**SM320208-1**