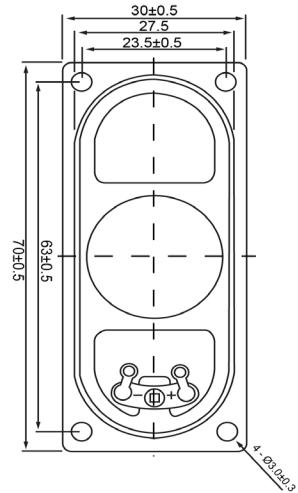
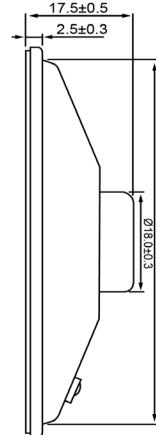


TOP VIEW**SIDE VIEW****Specifications**

Description	Value	Unit
Shape	Rectangle	
Resonant Frequency	550	(Hz)
Frequency Range	550 ~ 8,000	(Hz)
SPL @ 10cm	98	(dBA)
Impedance	8	(Ohm)
Cone Material	Paper	
Nominal Power	3	(W)
Max Power	5	(W)
Mount Type	Frame Mount	
Operating Temperature	-20 ~ +60	°C
Storage Temperature	-20 ~ +60	°C
Weight	17	(g)

Notes

1) All dimensions are in mm unless otherwise noted
2) All parts meet RoHS
 DB UNLIMITED

Revision History

Version	Description		Date	Approved
1	Released from Engineering		2/5/2014	J.S.
Drawn by	Date	Checked by	Date	Approved by
G.W.	1/27/2014	C.E.	1/29/2014	J.S.
				2/5/2014

Dynamic Speaker

SP700508-1