



Jameco P/N # 2318759


T/P P/N# XARR-03VF

Housing : 3 pin (see page 2)

Wires : UL#1007 26AWG

Wires length : 10"

Colors : as the photo

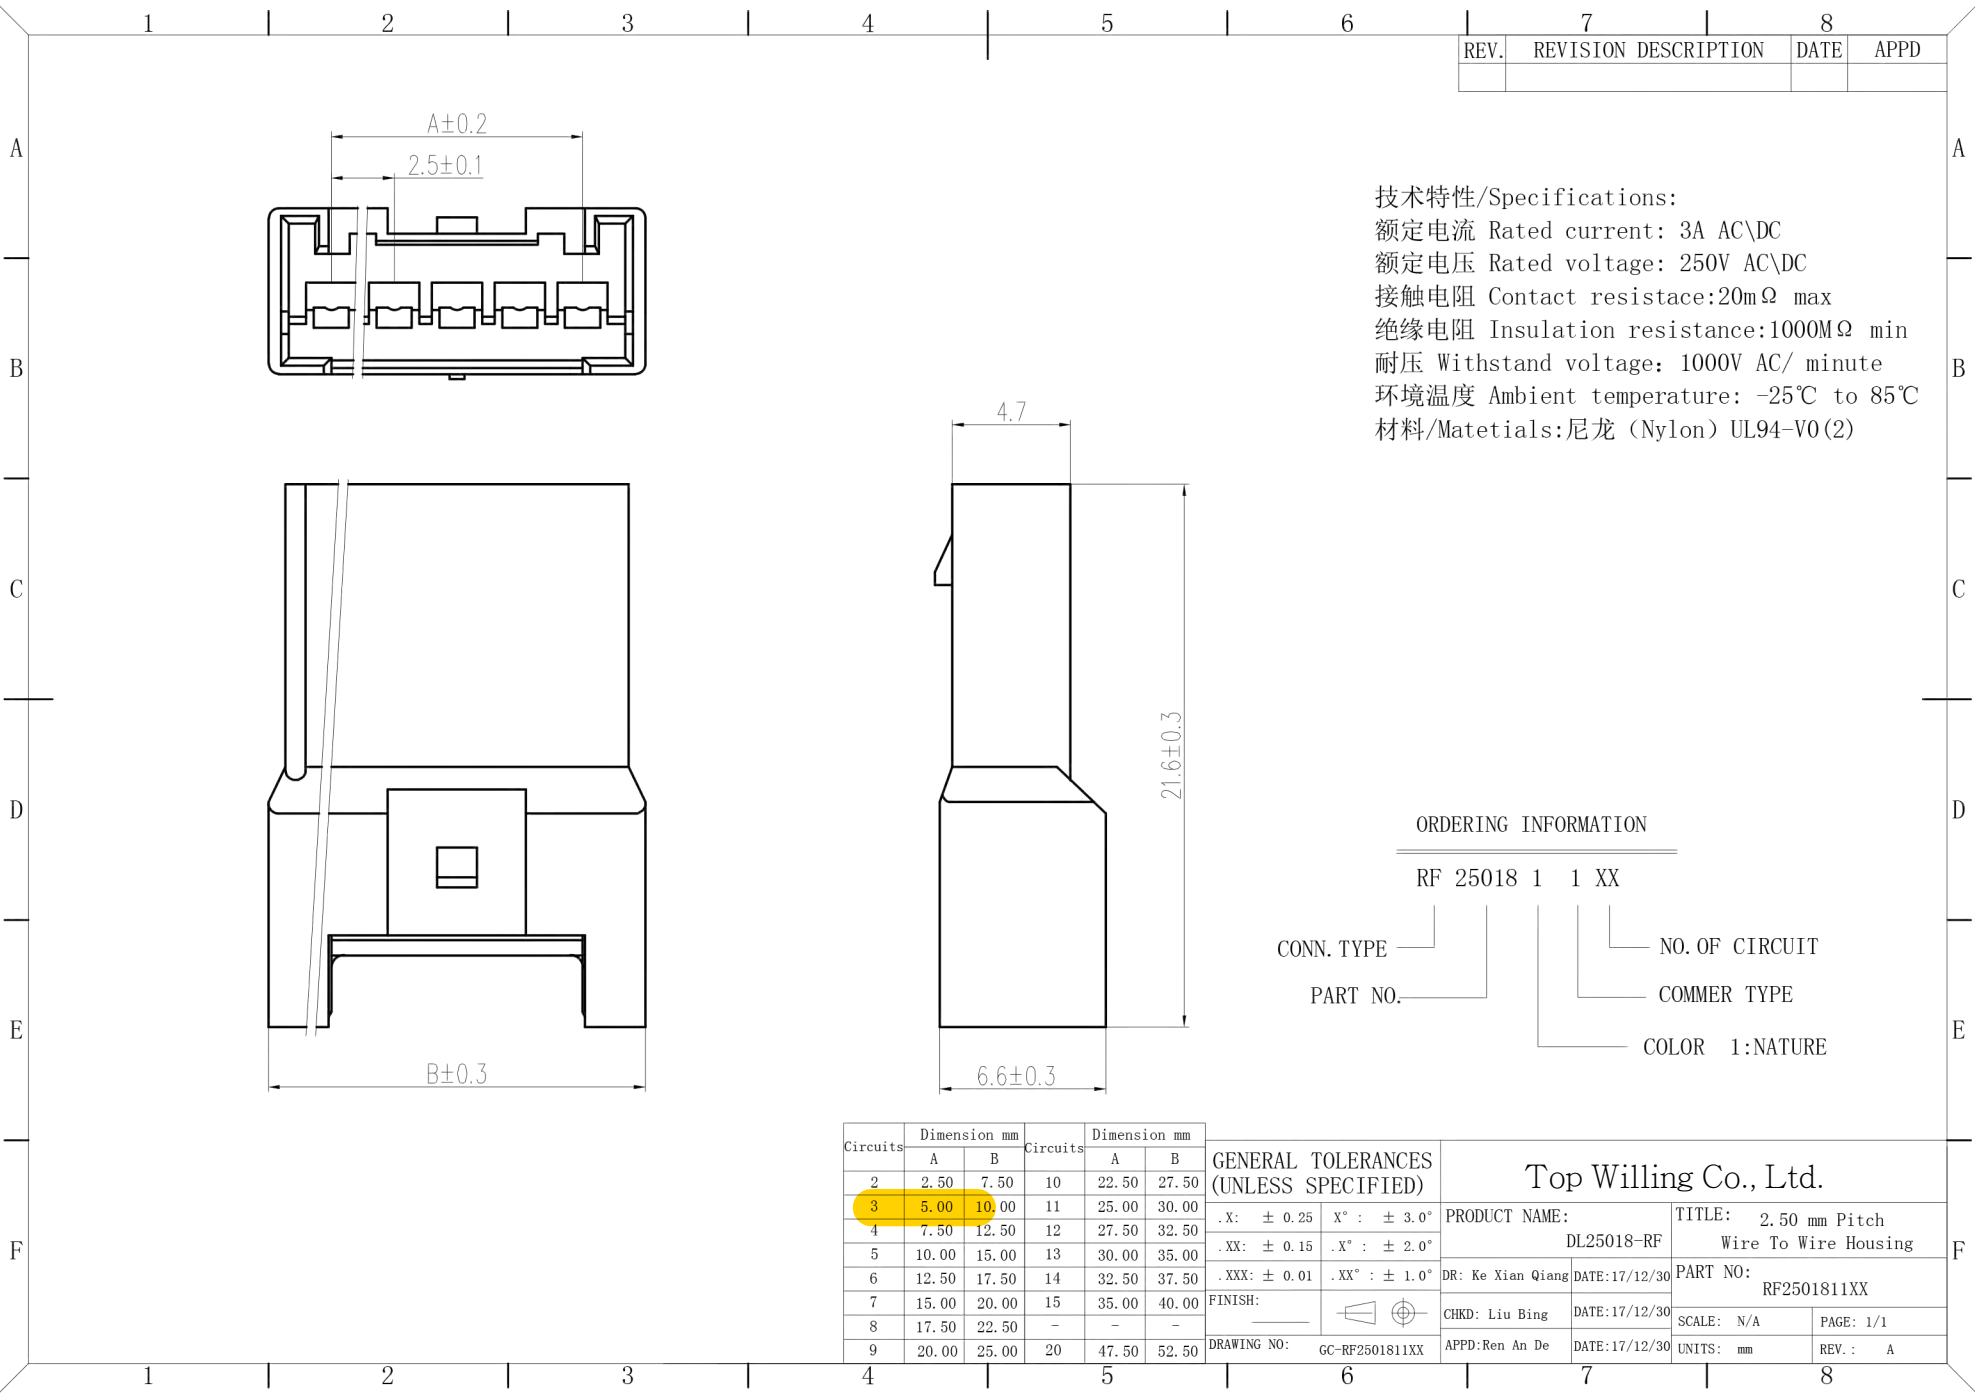

REV.	REVISION	DESCRIPTION	DATE	APPD

技术特性/Specifications:
额定电流 Rated current: 3A AC\DC
额定电压 Rated voltage: 250V AC\DC
接触电阻 Contact resistace:20mΩ max
绝缘电阻 Insulation resistance:1000MΩ min
耐压 Withstand voltage: 1000V AC/ minute
环境温度 Ambient temperature: -25℃ to 85℃
材料/Matetials:尼龙 (Nylon) UL94-V0(2)

ORDERING INFORMATION

RF 25018 1 1 XX

CONN. TYPE
PART NO.
NO. OF CIRCUIT
COMMER TYPE
COLOR 1:NATURE

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
2	2.50	7.50	10	22.50	27.50
3	5.00	10.00	11	25.00	30.00
4	7.50	12.50	12	27.50	32.50
5	10.00	15.00	13	30.00	35.00
6	12.50	17.50	14	32.50	37.50
7	15.00	20.00	15	35.00	40.00
8	17.50	22.50	-	-	-
9	20.00	25.00	20	47.50	52.50

GENERAL TOLERANCES
(UNLESS SPECIFIED)

.X: ± 0.25	X° : ± 3.0°
.XX: ± 0.15	.X° : ± 2.0°
.XXX: ± 0.01	.XX° : ± 1.0°
FINISH:	
DRAWING NO:	GC-RF2501811XX

Top Willing Co., Ltd.

PRODUCT NAME:		TITLE: 2.50 mm Pitch	
DL25018-RF		Wire To Wire Housing	
DR: Ke Xian Qiang	DATE:17/12/30	PART NO:	
		RF2501811XX	
CHKD: Liu Bing	DATE:17/12/30	SCALE: N/A	PAGE: 1/1
APPD:Ren An De	DATE:17/12/30	UNITS: mm	REV.: A