

RoHS Compliant





NOTES:

1. ELECTRICAL CHARACTERISTICS:
 - 1-1. VOLTAGE&CURRENT RATING:DC 30V MAX RATED
Current rating: 1.8A (Pin1,5) 1A(Pin2,3,4)
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX
 - 1-3. INSULATION RESISTANCE: 100MΩ MIN.
 - 1-4. DIELECTRIC WITHSTAND: 500V AC for 1 MINUTE
 - 1-5. OPERATING TEMPERATURE: -20℃~+85℃
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERT FORCE: 35N MAX.
 - 2-2. WITHDRAW FORCE:10N MIN INITIAL.
5N MIN AFTER 10000 CYCLES

3. DIFF TEST: 10000 CYCLES

4. PACKING: PF BAG

5. PRODUCT NO.

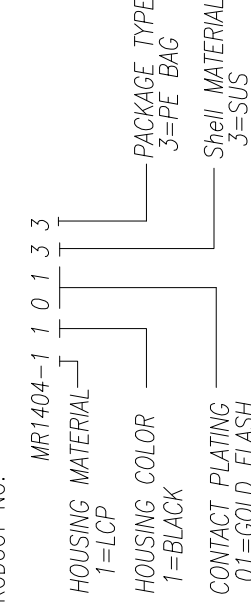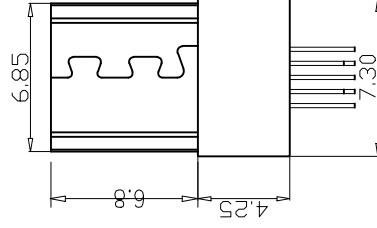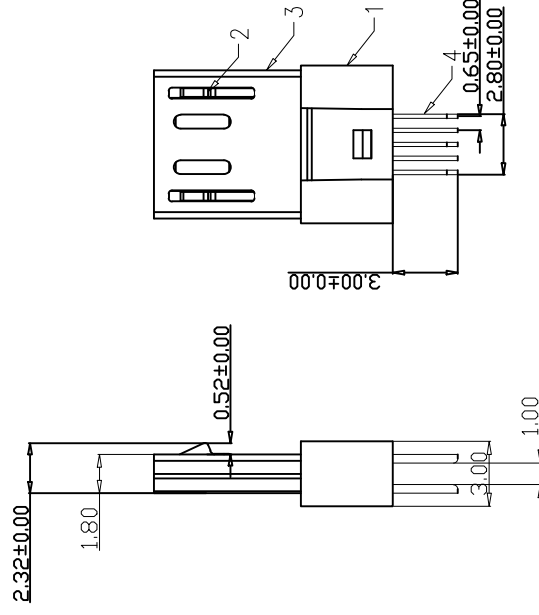

<i>E</i>	SHELL	1	STEEL T=0.20	PLATING NICKEL
<i>D</i>	LATCH	2	SUS T=0.40	N/A
<i>C</i>	CONTACT PIN	5	BRASS T=0.20	G/F PLATING AT CONTACT AREA Ni UNDFRPLATING OVERALL
<i>B</i>	CAP	1	LCP,UL94V-0	BLACK
<i>A</i>	HOUSING	1	LCP,UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

Top Willing Co., Ltd.

DECIMALS:				ANGLES:		MicroUSB A-B TYPE-5Pin PCB PLUG					
X	: ±0.5	X	: ±2°	DATA	12.06.2019	PART NO.	SCALE	SIZE	UNIT		
X.X	: ±0.3	X.X	: ±1°	DWN		Leo	SEE TABLE:	1:1	A4	mm	
X.XX	: ±0.2			CHKD		Win	DWG. NO.		SHEET	REV.	
				APVD		Tary	SEE TABLE:		/	A	

CUSTOMER COPY