


Date	Rev.	Description

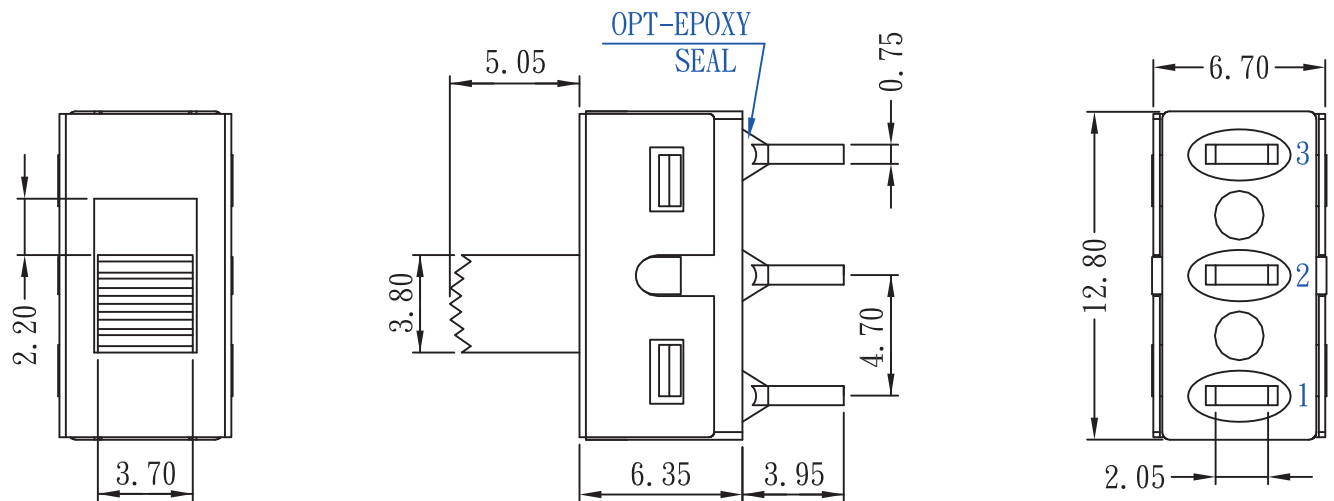



SPECIFICATIONS:
CONTACT RATING: 6 AMPS @ 120V AC or 28V DC.
3 AMPS @ 250V AC or 0.4 AMPS @ 20 V AC or DC
ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
CONTACT RESISTANCE: 10mΩ max. initial @ 2-4 V DC
100mA, for both silver and gold plated contacts.
INSULATION RESISTANCE: 1,000 mΩ min.
DIELECTRIC STRENGTH: 1,000 V RMS @ sea level.
OPERATING TEMPERATURE: -30°C to 130°C

MATERIALS:
CASE: Diallyl phthalate (DAP)(UL-94V-0)
ACTUATOR: NYLON.
HUSHING: STAINLESS STEEL.
TERMINAL/CONTACT: Red copper, with silver or gold plated.
or gold over silver.
SWITCH SUPPORT: Brass, tin plated.

▲ NOTE : OPT-EPOXY SEAL
N : NONE E : EPOXY

SCHEMATIC

TOLERANCE	
XX.	±0.5
X.	±0.2
.X	±0.2
.XX	±0.2



DCC. NO.
A4 DRAWING NO.

GOLDSUN ELECTRONICS CO., LTD.

PART NO. 2327071			Rev. 1
Description :			
UNIT mm	SCALE	SHEET 1 OF 1	CAS No: ERN No:
DRAWN : Jay			
VERIFY : Arthur / Sam			