

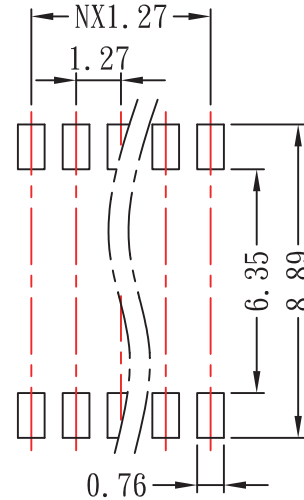
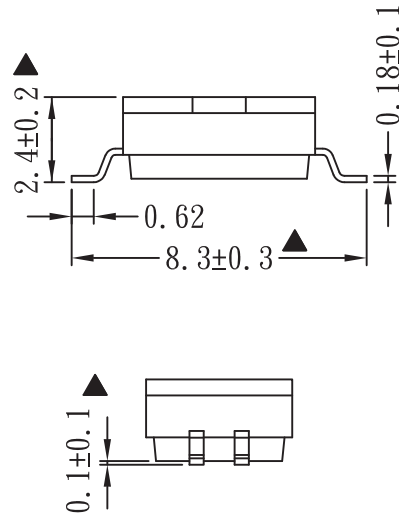



Date	Rev.	Description



P. C. B LAYOUT

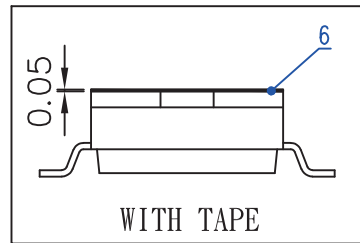

WITHOUT TAPE

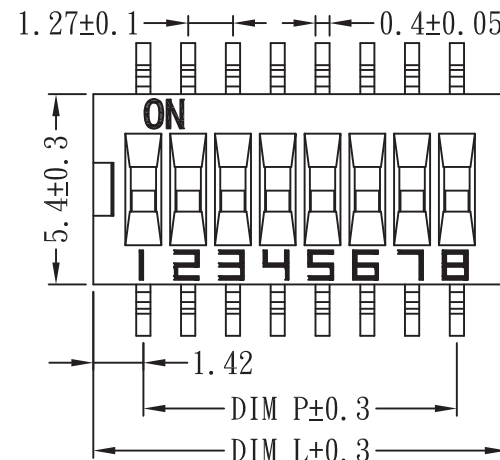

SPECIFICATION:

1. RATING: SWITCHING: 25mA, 24VDC
NON-SWITCHING: 100mA, 50VDC
2. CONTACT RESISTANCE: INITIAL: 50mΩ MAX
AFTER LIFE TEST: 100mΩ MAX
3. INSULATION RESISTANCE: 100MΩ min/500 VDC
4. WITHSTAND VOLTAGE: 300VAC FOR 1 MINUTE
5. OPERATION FORCE: 800g MAX
6. TRAVEL: 0.6mm
7. MECHANICAL LIFE: 2000 CYCLES MIN
8. ELECTRICAL LIFE: 1000 CYCLES/25mA, 24VDC
9. OPERATION TEMPERATURE: -40°C ~ +85°C
10. STORAGE TEMPERATURE: -40°C ~ +85°C
11. "▲" THE CRITICAL DIMENSION
12. RoHS COMPLIANCE

SOLDERING INFORMATION:

REFLOW SOLDERING:

240°C (20S MAX),
PEAK TEMPERATURE 260°C.

MANUAL SOLDERING:

30W IRON, 320±5°C, 3S MAX
KEEP IN "OFF" POSITION
DURING SOLDERING

POLE	Dim P	Dim L
2P	1.27	4.11
3P	2.54	5.38
4P	3.81	6.65
5P	5.08	7.92
6P	6.35	9.19
7P	7.62	10.46
8P	8.89	11.73
9P	10.16	13.00
10P	11.43	14.27
11P	12.70	15.54
12P	13.97	16.81

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.5	X° ±0.5
.X ±0.3	.X° ±0.3
.XX ±0.1	.XX° ±0.1

6	TAPE	1	POLYIMIDE	T=0.05
5	SPRING	2	COPPER ALLOY	Au PLATED
4	PIN	4	COPPER ALLOY	Au PLATED
3	HOUSING	1	THERMOPLASTIC	UL94-V0
2	COVER	1	THERMOPLASTIC	UL94-V0
1	ACRUATOR	2	NYLON	UL94-V0
NO.	PART NAME	Q' TY	MATERIALS	FINISHING

GOLDSUN ELECTRONICS CO., LTD.

PART NO. 2334319

Rev. 1

Description :

UNIT	SCALE	SHEET 1 OF 1	CAS No:
mm			ERN No:

DRAWN : Jay

VERIFY : Arthur / Sam

DCC. NO.
A4 DRAWING NO.