
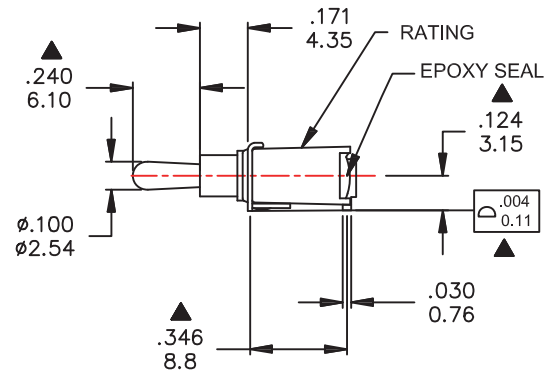


P.C. MOUNTING

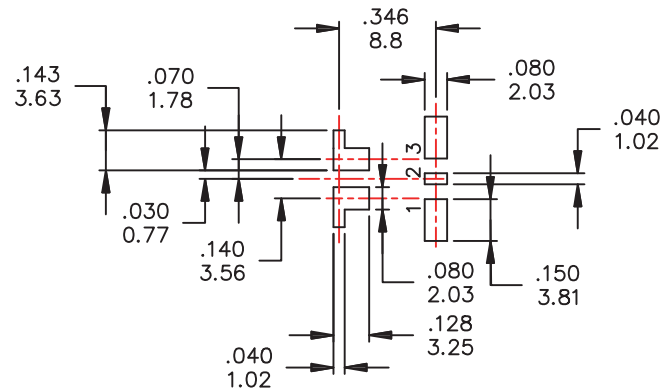

SPECIFICATIONS

MECHANICAL LIFE: 30,000 make-and-break cycles.
 CONTACT RATING: 0.4VA max. @20V AC or DC max.
 CONTACT RESISTANCE: 20mΩ max. initial @2-4 VDC
 100mA. for both silver and gold plated contacts.
 INSULATION RESISTANCE: 1,000MΩ min.
 DIELECTRIC STRENGTH: 1,000Vrms min. @sea level.
 OPERATING TEMPERATURE: -30°C to 85°C

MATERIALS

CASE & BUSHING: Glass filled nylon 6/6, retardant,
 heat stabilized (UL94V-0)
 ACTUATOR: Brass, chrome plated.
 Internal O-ring seal, standard for all actuators.
 SWITCH SPPORT: Brass, tin plated.
 TERMINAL / CONTACT: Copper alloy.
 RoHS & Lead Free

Date	Rev.	Description

SWITCH FUNCTION

Model No.	POS.1	POS.2	POS.3
2BS1	ON	NONE	ON
Term. Comm.	2-3	N/A	2-1
SCHEMATIC			

GOLDSUN ELECTRONICS CO., LTD.

PART NO. 2334335 Rev. 1

Description :

UNIT mm SCALE SHEET 1 OF 1 CAS No: ERN No:

DRAWN : Jay

VERIFY : Arthur / Sam

DCC. NO.

A4 DRAWING NO.

TOLERANCE:
 0.00 mm±0.25mm
 0.0 mm±0.40mm
 ANGULAR: ±5°