



SPECIFICATIONS:


1. MAXIMUM RATING: 50VDC, 100mA.
2. MINIMUM RATING: 20mVDC, 1μA.
3. CONTACT RESISTANCE: 100mΩ MAX.
4. INSULATION RESISTANCE: 100VDC-1000MΩ MIN.
5. WITHSTAND VOLTAGE: 250VAC-1 MINUTE
6. ROTARY TORQUE: 40~200gf.cm
7. TOTAL ROTARY ANGLE: 360° (4 STEPS)
8. LIFE CYCLE: 10,000 STEPS

5 CIRCUIT CHART

		CODE				
POSITIONS	0	C	0	1	2	3
	0	●	●			
	1	●		●		
	2				●	
	3	●				●

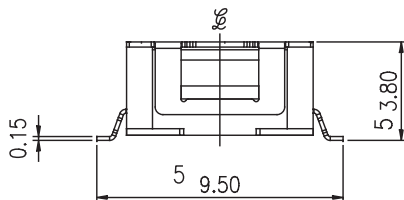


P.C.B. LAYOUT

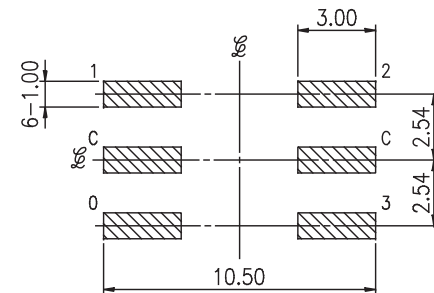

HATCHED AREA SHOW SOLDERING LAND

RSC-14RM

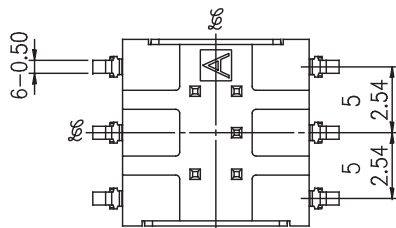

NO.	PART NAME	MATERIAL	Q'TY	FINISHING
1	FRAME	PA+G	1	
2	COVER	SUS	1	
3	ROTOR	LCP+G	1	
4	TERMINAL	PBS	6	Au PLATED
5	CONTACT PLATE	BeCu	1	Au PLATED
6	O-RING	SILICONE RUBBER	1	
7	SPACER	SUS	1	