
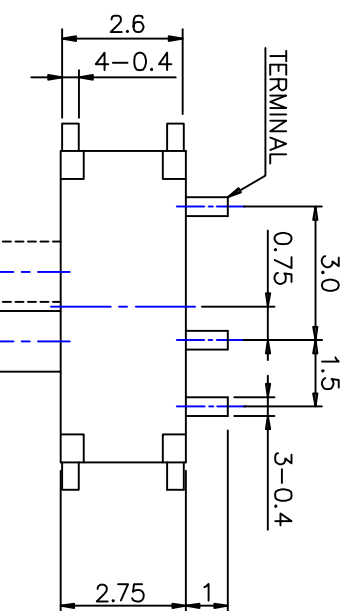


COM



Circuit Diagram

BSL-1290P(L)-(W/B)-(XX)-R

Specification:

- 1.Rating:0.5mA 12V DC
- 2.Circuit:1C-2P (1P2T)
- 3.Timing:Non-Shorting
- 4.Travel:1.6±0.1mm
- 5.Operating force:160±30gf
- 6.Contact resistance:100mΩ Max
- 7.Operating life:10,000 cycle
- 8.Reel Package:3,0000/Reel(EA)

P.C.B Land Pattern

Model	Knob t(mm)	Knob L(mm)
1290PA	1.1	1.5
1290PB	1.1	2.0
1290PC	1.1	2.5


Package :

RP: Reel Packing.
□ : Bag Packing.

Knob Color:

W: White
B : Black

Tolerance unless Otherwise stated(mm)	
less than 10	±0.1
10~30	±0.2
30~100	±0.3
Angle	±2°



單位	比例	日期
mm	Free	2013-04-13

核准	審核	設計繪圖
William	Amy	RST

料號	品名
BSL-1290P(L)-(W/B)-(XX)-R	Mini Slide Switch

頁數	1/1
----	-----

Top Willing Co., Ltd.

1	2	3	4	5
---	---	---	---	---