
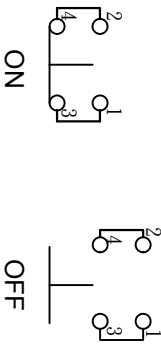
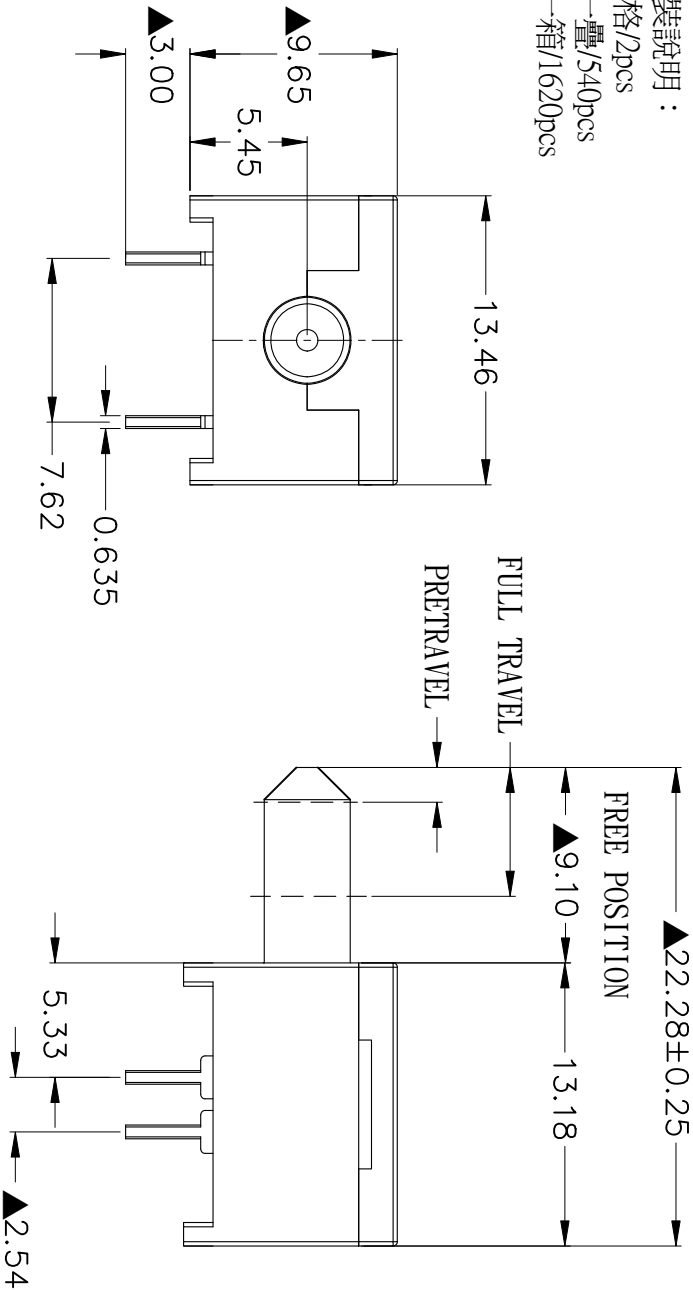
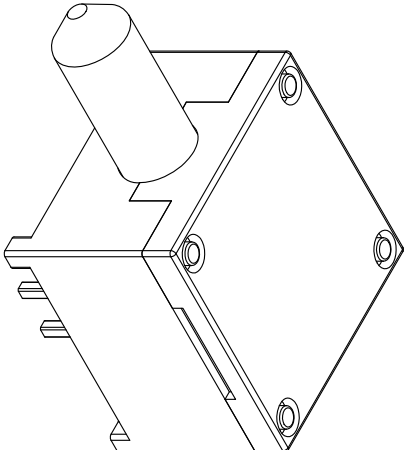


SPECIFICATIONS :
RATING : 0.4VA MAX. 20VAC OR 20VDC
CONTACT RESISTANCE : 100mΩ MAX.
INSULATION RESISTANCE : 100MΩ MIN.
DIELECTRIC STRENGTH : 250VAC FOR 1 MIN
ELECTRICAL LIFE : 10,000 CYCLES MIN.
OPERATION TEMPERATURE : -30°C TO +85°C


MECHANICAL :
OPERATION FORCE TO : 250±50gf
FREE POSITION : 9.10 ±0.25mm
PRETRAVELS : 1.52±0.38mm
FULL TRAVELS : 5.84mm Min.

MATERIALS :
ACTUATOR : LCP BLACK
CAP : LCP BLACK
BAES : LCP BLACK
CONTACT/TERMINALS : GOLD PLATED BRASS

包裝說明 :
1.1格/2pcs
2.一疊/540pcs
3.一箱/1620pcs

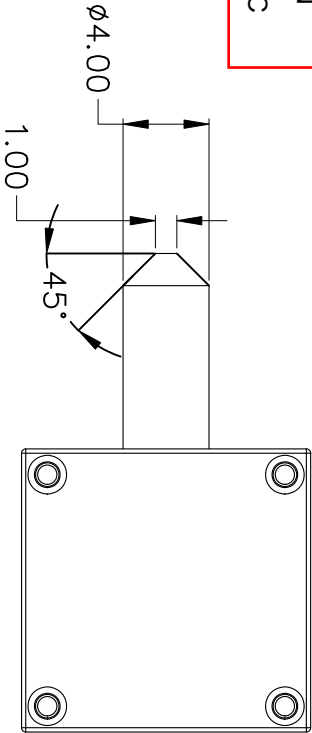

SCHMATIC

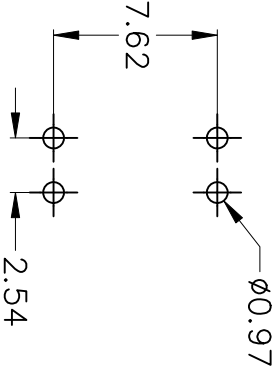

P.C.B MOUNTING

		符號	原尺寸	修改後尺寸	變更日期	SCALE (比例) : 4 : 1		TITLE 圖名		PUSH SWITCH,LATCHING		SIZE 圖紙	A4
1		Ⓐ				TOLERANCE (公差): 0.00 mm ± 0.25mm 0.0 mm ± 0.40mm ANGULAR : ± 2° DIP0002	DWG NO. 圖號		DIPC		UNIT 單位	mm	
2		Ⓑ					REV. 版本	A	DATE 日期	NOV - 15 - 2012	SHEET 張數	1 of 1	
3		Ⓒ					CHECKED BY 審核		RICHARD		DRAWN BY 製圖		
4		Ⓓ											
5		Ⓔ											
											IRENE		