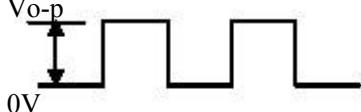


1. Specifications

AC-1205G-N1LF

Items		Units	Specifications	Conditions
01	Rated Voltage	Vo-p	12	
02	Operating Voltage	Vo-p	7.0 ~ 16.0	
03	Consumption Current	mA (Max)	Min 30	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
			Peak 60	
04	Direct Current Resistance	Ohm	140±14	
05	Sound Output	dBA (min)	85	Distance at 10cm, applying rated voltage, rated frequency square wave, 1/2duty subject to standard state.
06	Rated Frequency	Hz	2400	
07	Operating Temp.	°C	-20 ~ +80	
08	Storage Temp.	°C	-40 ~ +80	
09	Weight	Gram	2	

2. Measuring Method

2-1. Test Condition

STANDARD

Temperature : 15 ~ 35°C

Relative humidity : 25% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.


JUDGEMENT

Temperature : 20±3°C


Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar


2-2. Standard Drive Circuit:

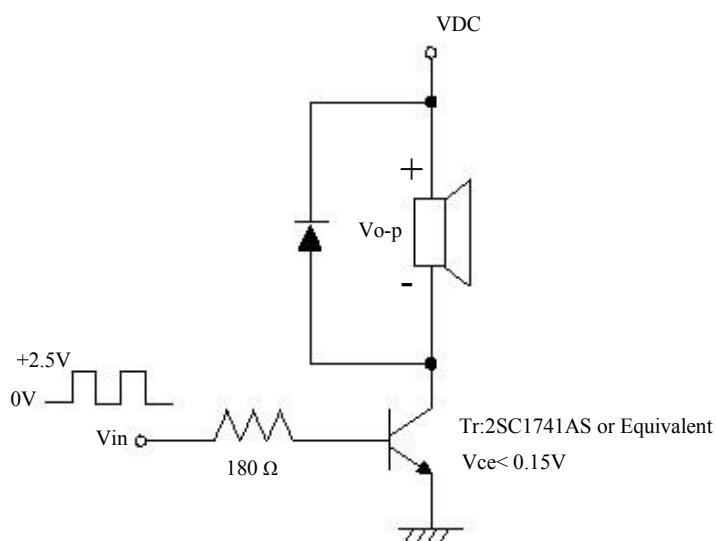

2-3. Standard Test Fixture

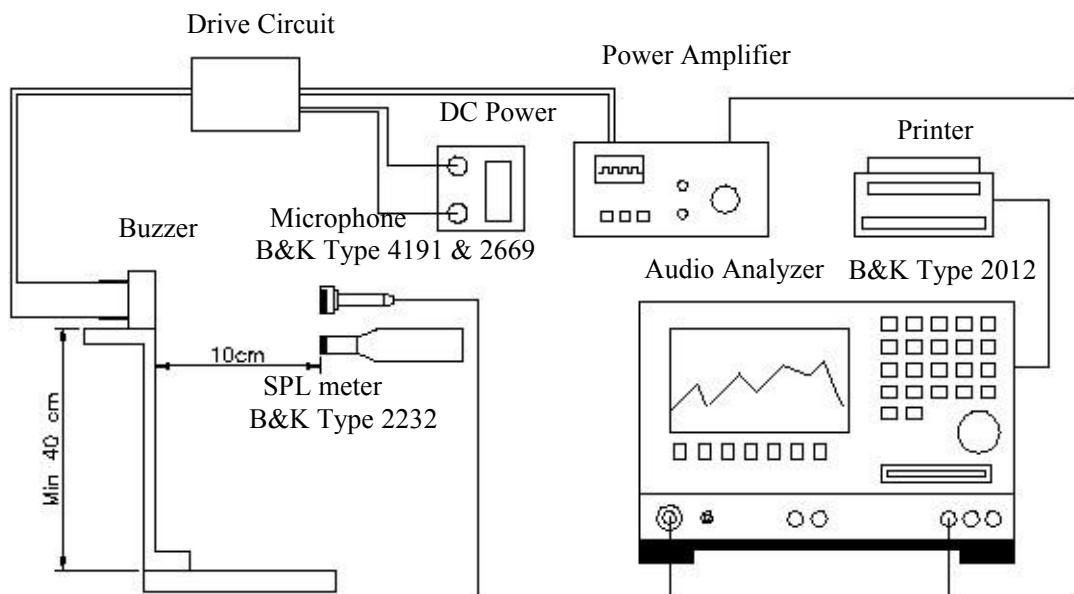


2-4. Frequency Response Curve

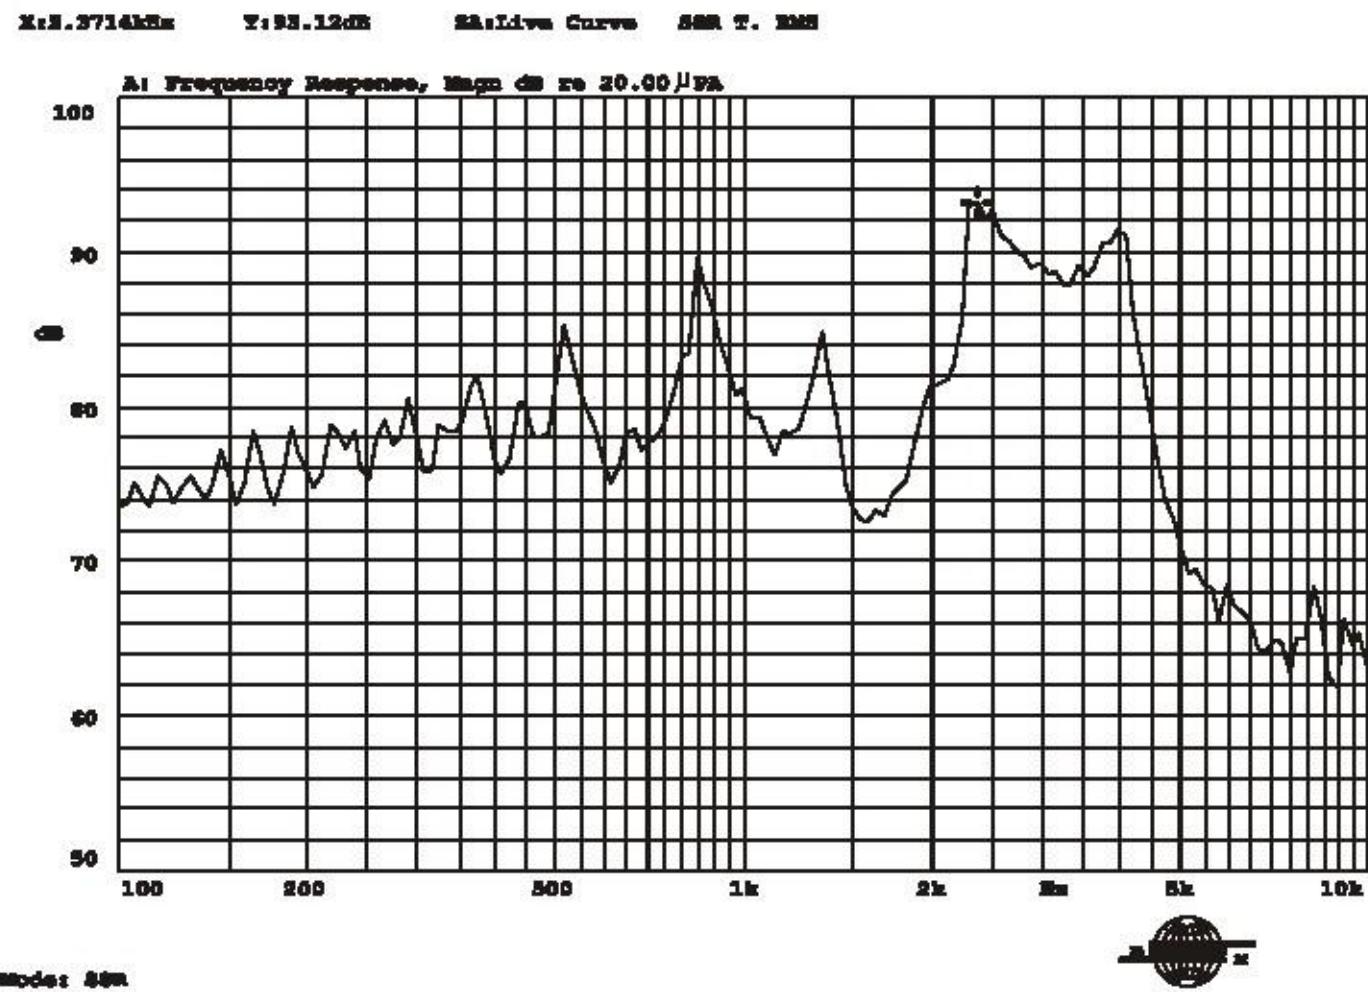


※ WAVE SOLDER AND WASH ALLOWED.

■ DIMENSION


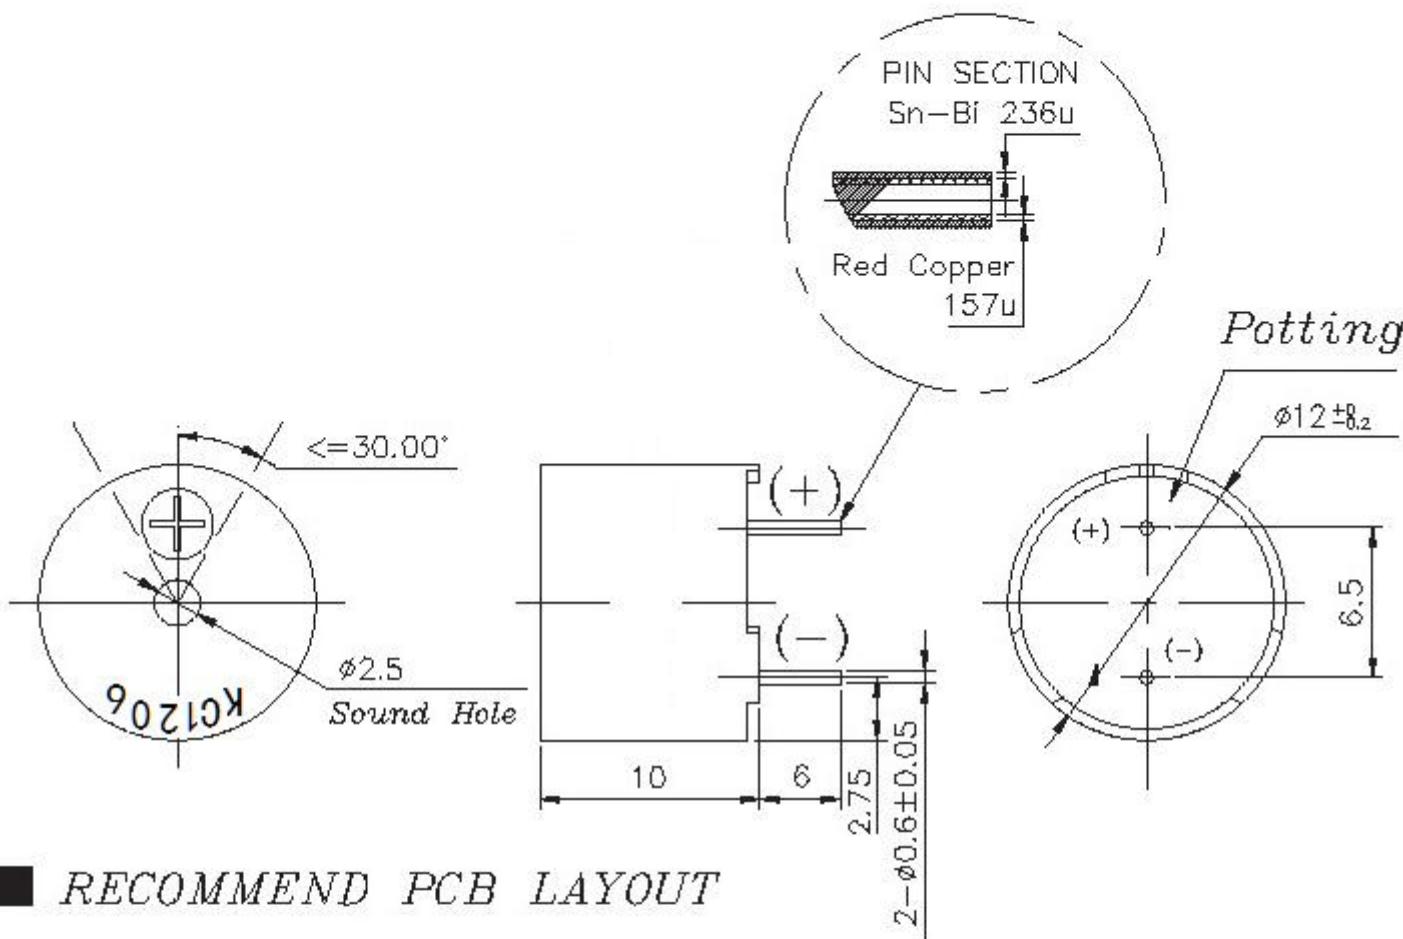


■ RECOMMEND PCB LAYOUT

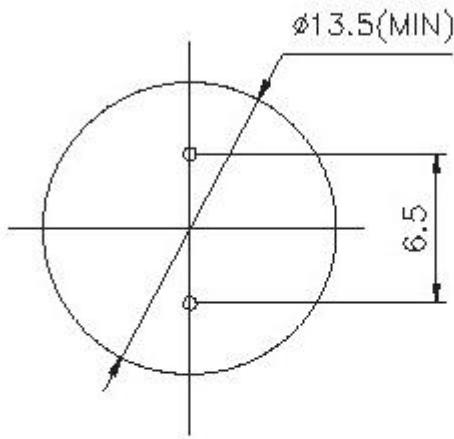

TITLE: MAGNETIC BUZZER		DRAWN: 04/18/2007	SCALE: 3:1	SHEET: 1 OF 1
PART NO.	HY1212GP	DESIGNED: R&D OF AAT	UNITS: mm	
DWG NO.	DTE-1140	CHECKED: 1	TOLERANCE ± 0.3	
		APPROVAL:	UNLESS OTHERWISE SPECIFIED:	
		REV	MATERIAL: ABS	ONE PLACE DECIMAL $\pm ***$
				TWO PLACE DECIMAL $\pm ***$
				THREE PLACE DECIMAL $\pm ***$

4. RELIABILITY TEST

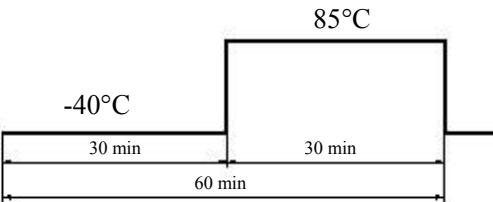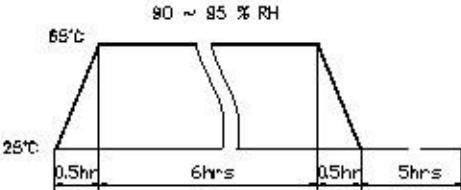Item	Test conditions	Evaluation standard
01 High temp.Storage life	The part shall be capable of withstanding a storage Temperature of 85°C for 96 hours.	
02 Low temp.Storage life	The part shall be capable of withstanding a storage Temperature of -40°C for 96 hours.	
03 Temp. cycle	<p>The part shall be subjected 10 cycles. One cycle shall consist of;</p> 	<p>After the test the part shall meet specifications without Any degradation in appearance and performance except S.P.L S.P.L shall be 77dB or more.</p>
04 Temp./Humidity cycle	<p>The part shall be subjected 10 cycles. One cycle shall be 12 hours and consist of;</p> 	
05 Operating life	<p>Rated Voltage, Frequency applied.</p> <ol style="list-style-type: none"> 1. Ordinary temperature The part shall be subjected to 1000 hours at room temperature ($25 \pm 10^\circ\text{C}$) 2. High temperature The part shall be subjected to 500 hours at 75°C 3. Low temperature The part shall be subjected to 500 hours at -30°C 	
06 Vibration	<p>The part shall be subjected to a vibration cycle of 10Hz to 55Hz to 10Hz in a period of 1 minute. Total peak amplitude shall be 1.52mm (9.3G). The vibration test shall consist of 2 hours per plane in each three mutually perpendicular planes for a total time of 6 hours.</p>	

Item	Test conditions	Evaluation standard
07 Fixed drop	The part shall be mounted on standard pc board and dropped from a height of 152cm onto a concrete floor 5 times in each 6 planes.(a total of 30 times)	
08 Free drop	The part only shall be dropped from a height of 75cm onto a 40mm thick wooden board 3 times in 3 axes (X.Y.Z). (a total of 9 times).	After the test the part shall meet specifications without Any degradation in appearance and performance except S.P.L S.P.L shall be 77dB or more.
09 Solder ability	Hand Soldering : $360\pm5^{\circ}\text{C}$ / 2 Sec.	
10 Solder heatresistance	Soldering into solder bath : $350\pm5^{\circ}\text{C}$ / 3 Sec	
11 Lead strength	Pull lead with a force of 10N, on the direction of the lead axis for $10:10\pm1$ sec	
12 Washability	Solvent : deionized water Solvent temp. : $55\pm5^{\circ}\text{C}$ Soaking time : 5 ± 0.5 min.	