


EH13 Series

- Crystal Clock Oscillators
- LVCMOS Output
- +3.3V Supply Voltage
- Tri-State Output Function
- Custom Lead Length & Gull Wing Options
- 14 pin DIP Metal Package
- RoHS Compliant (Pb-free)



ECLIPTEK
CORPORATION

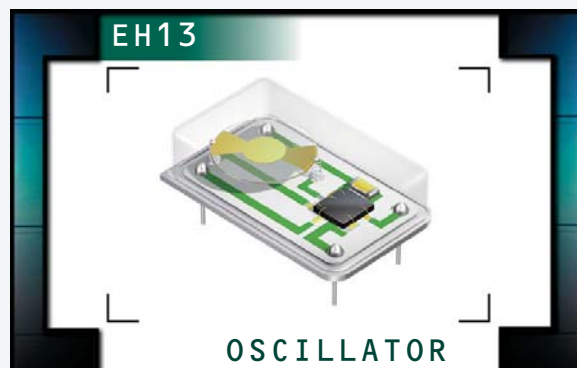

NOTES

ELECTRICAL SPECIFICATIONS

Frequency Range		1.000MHz to 155.520MHz
Operating Temperature Range		0°C to 70°C or -40°C to 85°C
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{DD})		3.3V _{DC} ±0.3V _{DC}
Input Current		35mA Maximum (Unloaded)
Frequency Tolerance / Stability		Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, First Year Aging at 25°C, Shock, and Vibration ±100ppm, ±50ppm, ±25ppm, or ±20ppm Maximum
Output Voltage Logic High (V_{OH})		2.7V _{DC} Minimum $I_{OH} = -8mA$
Output Voltage Logic Low (V_{OL})		0.5V _{DC} Maximum $I_{OL} = +8mA$
Rise Time / Fall Time	≤70.000MHz 20% to 80% of Waveform	6 nSeconds Maximum
	>70.000MHz 20% to 80% of Waveform	4 nSeconds Maximum
Load Drive Capability	≤70.000MHz	30pF Maximum
	>70.000MHz	15pF Maximum
Duty Cycle (at $V_{DD}=3.3V_{DC}$)		at 50% of Waveform 50 ±10(%) (Standard) or 50 ±5(%) (Optional)
Tri-State Input Voltage	V_{IH} : No Connection or ≥2.2V _{DC}	Enables Output
	V_{IL} : ≤0.8V _{DC}	Disables Output: High Impedance
Aging (at 25°C)		±5ppm / year Maximum
Start Up Time		10mSeconds Maximum
Period Jitter: Absolute		±250pSec Maximum, ±100pSec Typical
Period Jitter: One Sigma		±50pSec Maximum, ±40pSec Typical

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EH13

PACKAGE
14 pin DIP

VOLTAGE
3.3V

CLASS
OS44

REV. DATE
12/05

PART NUMBERING GUIDE

EH13 00 ET TS - 70.000M - G

FREQUENCY TOLERANCE / STABILITY

00= ± 100 ppm Maximum
45= ± 50 ppm Maximum, 25= ± 25 ppm Maximum
20= ± 20 ppm Maximum

OPERATING TEMP. RANGE

Blank= 0°C to 70°C , ET= -40°C to 85°C

DUTY CYCLE

Blank= $50 \pm 10(\%)$, T= $50 \pm 5(\%)$

AVAILABLE OPTIONS

Blank=None
CLXXX=Custom Lead Length
G=Full Size Gull Wing


FREQUENCY

OUTPUT CONTROL FUNCTION

TS=Tri-State Enable High

NOTES

MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

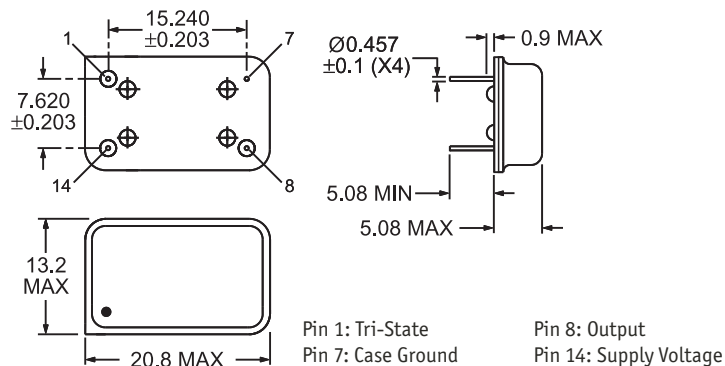

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic

Fine Leak Test
Gross Leak Test
Mechanical Shock
Vibration
Lead Integrity
Solderability
Temperature Cycling
Resistance to Soldering Heat
Resistance to Solvents

Specification

MIL-STD-883, Method 1014, Condition A
MIL-STD-883, Method 1014, Condition C
MIL-STD-202, Method 213, Condition C
MIL-STD-883, Method 2007, Condition A
MIL-STD-883, Method 2004
MIL-STD-883, Method 2002
MIL-STD-883, Method 1010
MIL-STD-883, Method 210
MIL-STD-883, Method 215

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: EH13 TS

Series Designator

Line 3: XX.XXX M

Frequency in MHz
(5 Digits Maximum + Decimal)

Line 4: XX Y ZZ

Week of Year
Last Digit of Year
Ecliptek Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EH13

PACKAGE
14 pin DIP

VOLTAGE
3.3V

CLASS
OS44


REV. DATE
12/05

EH13 Series

- Crystal Clock Oscillators
- LVCMOS Output
- +3.3V Supply Voltage
- Tri-State Output Function
- Custom Lead Length & Gull Wing Options
- 8 pin DIP Metal Package
- RoHS Compliant (Pb-free)



ECLIPTEK[®]
CORPORATION

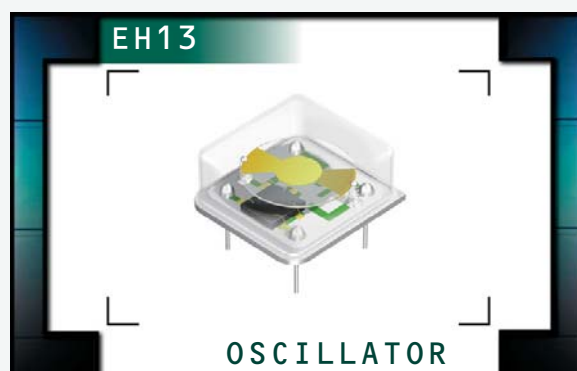

NOTES

ELECTRICAL SPECIFICATIONS

Frequency Range		1.000MHz to 155.520MHz
Operating Temperature Range		0°C to 70°C or -40°C to 85°C
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{DD})		3.3V _{DC} ±0.3V _{DC}
Input Current		35mA Maximum (Unloaded)
Frequency Tolerance / Stability	Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, First Year Aging at 25°C, Shock, and Vibration	±100ppm, ±50ppm, ±25ppm, or ±20ppm Maximum
Output Voltage Logic High (V_{OH})		2.7V _{DC} Minimum $I_{OH} = -8mA$
Output Voltage Logic Low (V_{OL})		0.5V _{DC} Maximum $I_{OL} = +8mA$
Rise Time / Fall Time	≤70.000MHz 20% to 80% of Waveform	6 nSeconds Maximum
	>70.000MHz 20% to 80% of Waveform	4 nSeconds Maximum
Load Drive Capability	≤70.000MHz	30pF Maximum
	>70.000MHz	15pF Maximum
Duty Cycle (at $V_{DD}=3.3V_{DC}$)		50 ±10(%) (Standard) or 50 ±5(%) (Optional)
Tri-State Input Voltage	V_{IH} : No Connection or ≥2.2V _{DC}	Enables Output
	V_{IL} : ≤0.8V _{DC}	Disables Output: High Impedance
Aging (at 25°C)		±5ppm / year Maximum
Start Up Time		10mSeconds Maximum
Period Jitter: Absolute		±250pSec Maximum, ±100pSec Typical
Period Jitter: One Sigma		±50pSec Maximum, ±40pSec Typical

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EH13

PACKAGE
8 pin DIP

VOLTAGE
3.3V

CLASS
OS45

REV. DATE
08/05

PART NUMBERING GUIDE

EH13 00 HS ET TS - 70.000M - G TR

FREQUENCY TOLERANCE / STABILITY

00=±100ppm Maximum
45=±50ppm Maximum, 25=±25ppm Maximum
20=±20ppm Maximum

PACKAGE

HS=Half Size 8 Pin DIP

OPERATING TEMP. RANGE

Blank=0°C to 70°C, ET=-40°C to 85°C

DUTY CYCLE

Blank=50 ±10(%), T=50 ±5(%)

PACKAGING OPTIONS

Blank=Bulk
TR=Tape & Reel (only offered with
Half Size G and Half Size G2 Options)

AVAILABLE OPTIONS


Blank=None
CLXXX=Custom Lead Length
G=Half Size Gull Wing
G2=Half Size Gull Wing

FREQUENCY

OUTPUT CONTROL FUNCTION

TS=Tri-State Enable High

MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

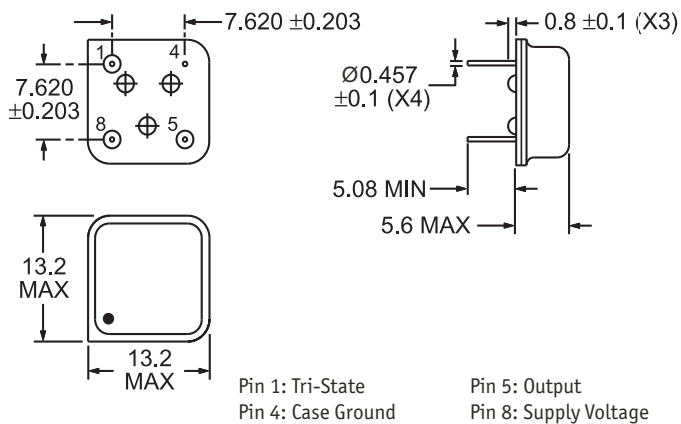


MARKING SPECIFICATIONS

Line 1: ECLIPTEK
Line 2: EH13 TS
Line 3: XX.XXX M
Line 4: XX Y ZZ

Series Designator
Frequency in MHz
(5 Digits Maximum + Decimal)
Week of Year
Last Digit of Year
Eclipse Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

TAPE AND REEL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

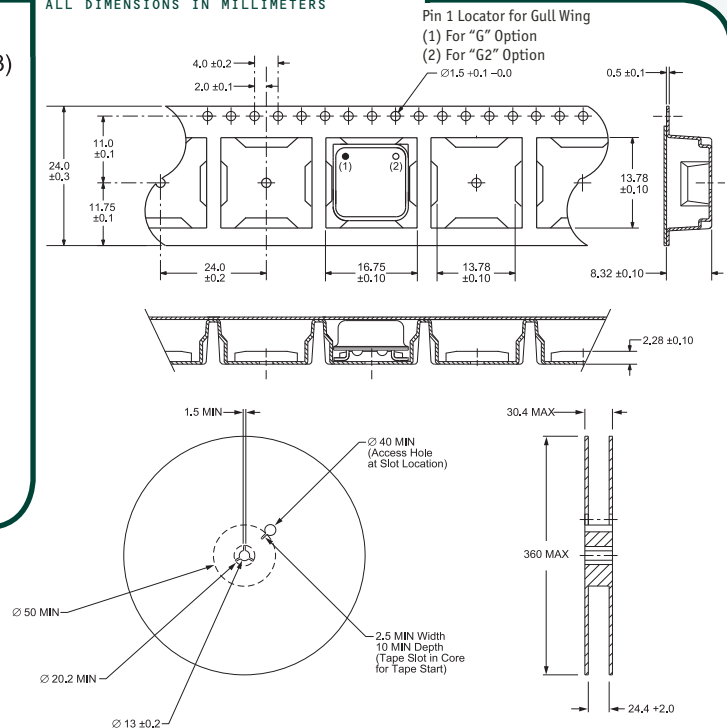

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic

Fine Leak Test
Gross Leak Test
Mechanical Shock
Vibration
Lead Integrity
Solderability
Temperature Cycling
Resistance to Soldering Heat
Resistance to Solvents

Specification

MIL-STD-883, Method 1014, Condition A
MIL-STD-883, Method 1014, Condition C
MIL-STD-202, Method 213, Condition C
MIL-STD-883, Method 2007, Condition A
MIL-STD-883, Method 2004
MIL-STD-883, Method 2002
MIL-STD-883, Method 1010
MIL-STD-883, Method 210
MIL-STD-883, Method 215

250 Pieces Per Reel
Compliant to EIA-481A

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EH13	8 pin DIP	3.3V	OS45	08/05

Product EOL Announcement

The Product EOL Announcement signifies that a product series has entered the final phase of the Ecliptek Product Life Cycle, and serves as advance notice of product termination per the Ecliptek End of Life (EOL) policy.

Ecliptek Corporation announces End of Life initiation for the following product series with the intent of discontinuing its availability.

EOL Series	Description
EH13 (8 Pin Dip)	Quartz Crystal Clock Oscillators XO (SPXO) LVCMOS (CMOS) 3.3Vdc 8 Pin DIP Metal Thru-Hole
EH13 (14 Pin Dip)	Quartz Crystal Clock Oscillators XO (SPXO) LVCMOS (CMOS) 3.3Vdc 14 Pin DIP Metal Thru-Hole

EOL Timeline

The last date Ecliptek will accept orders (Stage 2) and the last date orders may be scheduled for shipment (Stage 3) are listed in the table below.

Stage 1 EOL Announce Date	Stage 2 Last Date to Order	Stage 3 Last Date to Ship
1-July-2012	31-December-2012	31-January-2013

Alternative Products

In order to fulfill your requirements beyond this product's discontinuation, we invite you to evaluate the recommended alternative Ecliptek product series referenced below. Please click on the link to view the data sheet.

Alternative Series	Description
EHH13	Quartz Crystal Clock Oscillators XO (SPXO) LVCMOS (CMOS) 3.3Vdc 8 Pin DIP Metal Thru-Hole
EHF13	Quartz Crystal Clock Oscillators XO (SPXO) LVCMOS (CMOS) 3.3Vdc 14 Pin DIP Metal Thru-Hole

Automated EOL Notification

Ecliptek offers automated notification of Product EOL Announcements. Place part numbers for which you'd like to receive EOL Notifications into your personalized [Parts List](#) on our website and we'll email you when EOL is announced.

Please do not hesitate to contact us if you have any questions or need further assistance.

Ecliptek Global Customer Support Team
(800) 433-1280 x300
customersupport@ecliptek.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[EH1320TS-35.328M](#) [EH1300ETTS-155.52M](#) [EH1325HSTS-100.000M](#) [EH1300HSETTS](#) [EH1300TTS](#)
[EH1300HSTS-18.000MHZ](#) [EH1300HSTS-84.00MHZ](#) [EH1300HSTS-13.00MHZ](#) [EH1300HSTS-10.00MHZ](#)
[EH1300HST-14.00MHZ](#) [EH1300HSTS-12.00MHZ](#) [EH1300HSTS-42.00MHZ](#) [EH1300HSTS-65.00MHZ](#)
[EH1300HSETTTS](#) [EH1300HSETTS-6.00MHZ](#) [EH1300ETTS50.0000](#) [EH1300HSTTS](#) [EH1300HSETTTS-66.000MHZ](#)
[EH1300HSTS-130.00MHZ](#) [EH1325HSTTS-66.000M](#) [EH1325HSTTS-33.000M](#) [EH1325HSTS-33.000M](#) [EH1300ETTS](#)
[EH1300TS-100.000MHZ](#) [EH1300HSTS-20.000M](#) [EH1325HSTTS-50.000M](#) [EH1325HSTTS-25.000M](#) [EH1300TS-](#)
[74.25MHZ](#) [EH1300TS-74.176](#) [EH1325HSTS-25.000M](#) [EH1300HSTS](#) [EH1300TS-20.00MHZ](#) [EH1300TS-10.00MHZ](#)
[EH1300TS-48.00MHZ](#) [EH1300ETTS](#) [EH1300HSETTS-12.00MHZ](#) [EH1300HSETTS-2.00MHZ](#) [EH1300TS](#)
[EH1300HSTS-8.00MHZ](#) [EH1300HSTS-6.00MHZ](#) [EH1300ETTS-22.5792MHZ](#) [EH1300HSTS-4.9152](#) [EH1300HSETTS-](#)
[1.024MHZ](#) [EH1300HSTS-60.00MHZ](#) [EH1300TS-35.328MHz](#)