




.156"(3.96mm) pitch Wire to Board Connectors

CH3962 Series

- * Poles:2-14
 - * Material:NYLON 66 UL94V-0 White
 - * Suitable CT3962T series terminal
 - * Mates with CW3962X-XX series Header
- Specifications
- * Current rating: 5A AC, DC
 - * Voltage rating: 250V AC, DC
 - * Temperature range: -25°C~+105°C
 - * Insulation resistance: 1,000M Ω min.
 - * Withstand voltage: 1,500V AC/minute

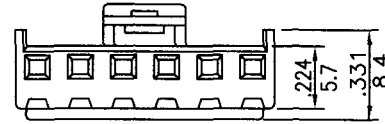


CIRCUITS	PART NO	DIMENSION in.(mm)		CIRCUITS	PART NO	DIMENSION in.(mm)	
		A	B			A	B
2	CH3962-02	0.156(3.96)	0.319(8.1)	9	CH3962-09	1.247(31.68)	1.410(35.82)
3	CH3962-03	0.312(7.92)	0.475(12.06)	10	CH3962-10	1.403(35.64)	1.566(39.78)
4	CH3962-04	0.468(11.88)	0.631(16.02)	11	CH3962-11	1.559(39.60)	1.722(43.74)
5	CH3962-05	0.624(15.84)	0.787(19.98)	12	CH3962-12	1.715(43.56)	1.878(47.70)
6	CH3962-06	0.780(19.80)	0.942(23.94)	13	CH3962-13	1.871(47.52)	2.034(51.66)
7	CH3962-07	0.935(23.76)	1.098(27.90)	14	CH3962-14	2.027(51.48)	2.190(55.62)
8	CH3962-08	1.091(27.72)	1.254(31.86)				


.156"(3.96mm) pitch crimp terminal

CT3962T Series



- * Material:Brass
- * Finished:Tin-plated
- * Used in CH3962 series housings
- * Wire range:AWG#18~#24
- * Insulation O.D:2.80mm(max)
- * Thickness:0.25mm
- * Q'TY:4,000pcs/reel

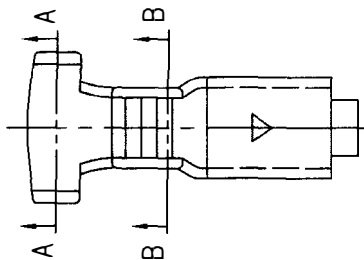

inches
mm



A-A SECTION



B-B SECTION

