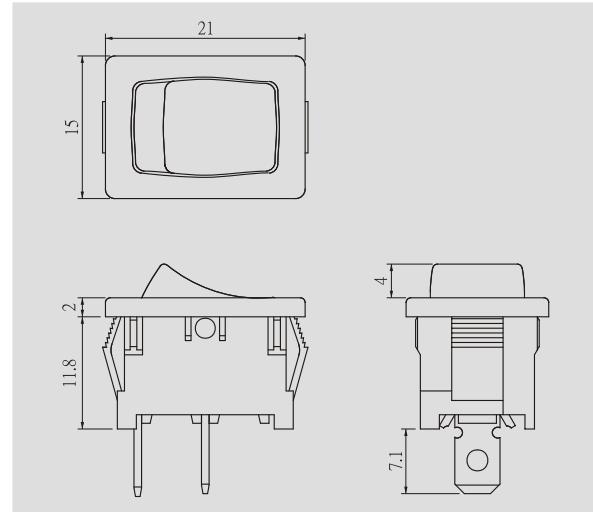


Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

R13-66**Rating**

16A 125V AC 1/3HP 125V AC
10A 250V AC 1/2HP 250V AC

Contact resistance

50mΩ Max

Insulation resistance

DC 500V 100MΩ Min

Dielectric strength













AC 1500V 1 minute

Cut-out

	X	Y
	19.2-0.1	13.0+0.1
	19.4-0.1	13.0+0.1
	19.8-0.1	13.0+0.1

FEATURES

- * MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Illuminated actuators are molded in PC, available with red, amber, and green colors.
- * Snap-in mounting, easy to install switch into panel.
- * Waterproof cover is optional.
- * Dust resistant.

**R13-66** **FUNCTION****TERMINAL**

0 2 .187" SQ

0 5 SO

0 9 PC

1 0 PC ANGLE



* () =momentary