


Distributed by:



www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

R13-243

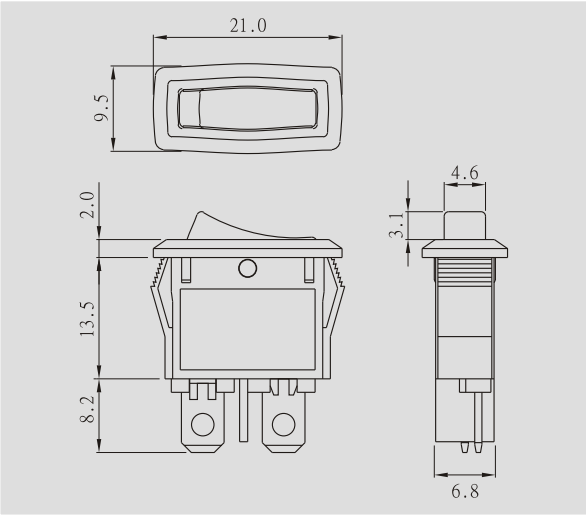

Rating
8A 125V AC 4A 250V AC
Contact resistance
50mΩ Max
Insulation resistance
DC 500V 100MΩ Min
Dielectric strength
AC 1500V 1 minute
Cut-out

X
Y

	X	Y
0.75~1.25	19.2-0.1	7.0+0.1
1.25~2	19.4-0.1	7.0+0.1
2~3	19.8-0.1	7.0+0.1

FEATURES

- * MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- * Snap-in mounting, easy to install switch into panel.

R13-243

FUNCTION	TERMINAL
A ON OFF 2P SPST	0 2 .187" SQ
E ON (OFF) 2P SPST	
F (ON) OFF 2P SPST	

* () =momentary

