

PLCC SOCKETS

PLASTIC LEADED CHIP CARRIER SOCKET

SURFACE MOUNT

PLCC SERIES

INTRODUCTION:

Adam Tech SMT PLCC Series Sockets are low profile, thin wall sockets designed to convert plastic leaded chips to a thru-hole PCB format on a .100" centerline grid. They conform to JEDEC MS 016 and MS 018 pin count standards. Adam Tech's superior precision stamped contact design provides consistent, high retention contacts for all size chips. Chip exchanges or replacements are easily made with Adam Tech's chip remover part no. PLCC-EXT.

FEATURES:

- Full range of sizes from 20P ~ 100P
- Consistent, uniform high retention contacts
- Compatible with wide range of chip sizes
- No solder wicking design
- Hi Temp PPS insulator
- Open frame design for viewable solder joints

MATING PLASTIC LEADED CHIPS:

All EIA / JEDEC compliant PLCC

SPECIFICATIONS:

Material:

Standard Hi-Temp insulator: PPS, Glass reinforced, rated UL94V-0
Insulator Color: Brown

Contacts: Phosphor Bronze

Contact Plating:

Tin over copper underplate overall

Electrical:

Operating voltage: 250V AC max.

Current rating: 1 Amp max.

Contact resistance: 30 mΩ max. initial

Insulation resistance: 1000 MΩ min.

Dielectric withstanding voltage: 500V AC for 1 minute

Mechanical:

Insertion force: 6.35 oz max.

Withdrawal force: 1.0 oz min

Temperature Rating:

Operating temperature: -55°C to +105°C


Soldering process temperature: 260°C

PACKAGING:


Anti-ESD plastic tubes

APPROVALS AND CERTIFICATIONS:

UL Recognized & CSA Certified, File no. E224053

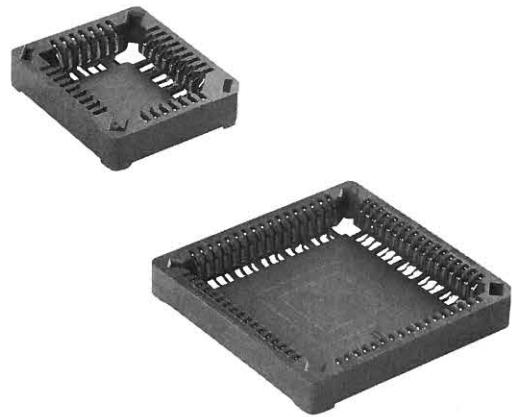

ORDERING INFORMATION

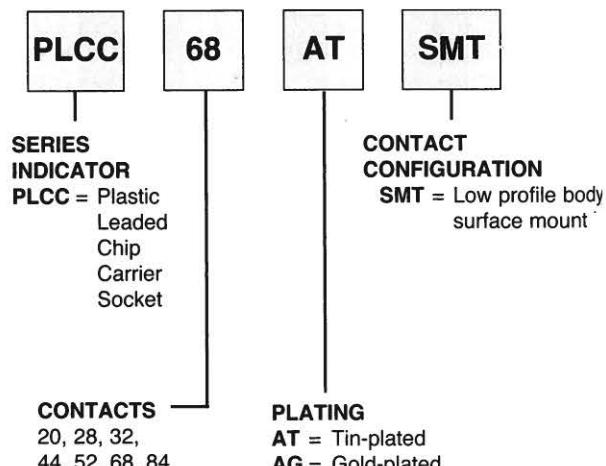

HI-TEMP
INSULATOR
AVAILABLE

OPTIONS:


Add designator(s) to end of part number

P = With polarizing pegs


TR = Tape and reel packaging

PLCC SOCKETS
PLASTIC LEADED CHIP CARRIER SOCKET
SURFACE MOUNT
PLCC SERIES


PLCC-32-AT-SMT




32 Position Socket




PLCC-44-AT-SMT




44 Position Socket




PLCC-68-AT-SMT

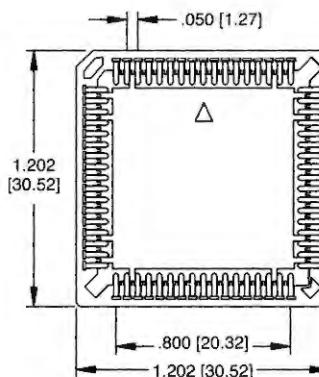


68 Position Socket

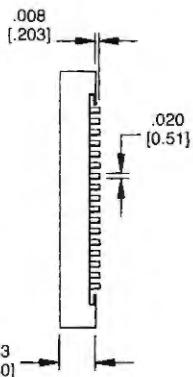

PLCC-84-AT-SMT

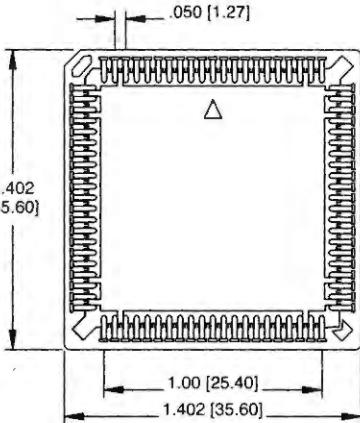

84 Position Socket

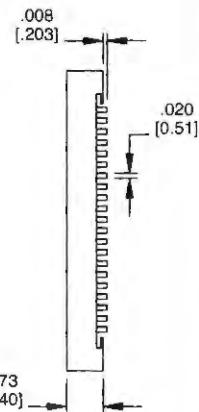

Recommended Solder Pad Layout

POSITIONS	E	F
20	.200 [5.08]	.200 [5.08]
28	.300 [7.62]	.300 [7.62]
32	.300 [7.62]	.400 [10.16]
44	.500 [12.70]	.500 [12.70]
52	.600 [15.24]	.600 [15.24]
68	.800 [20.32]	.800 [20.32]
84	1.000 [25.40]	1.000 [25.40]

