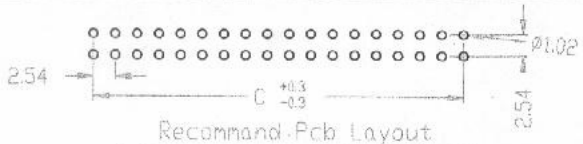

Recommand Pcb Layout



Old Ejector



New Ejector

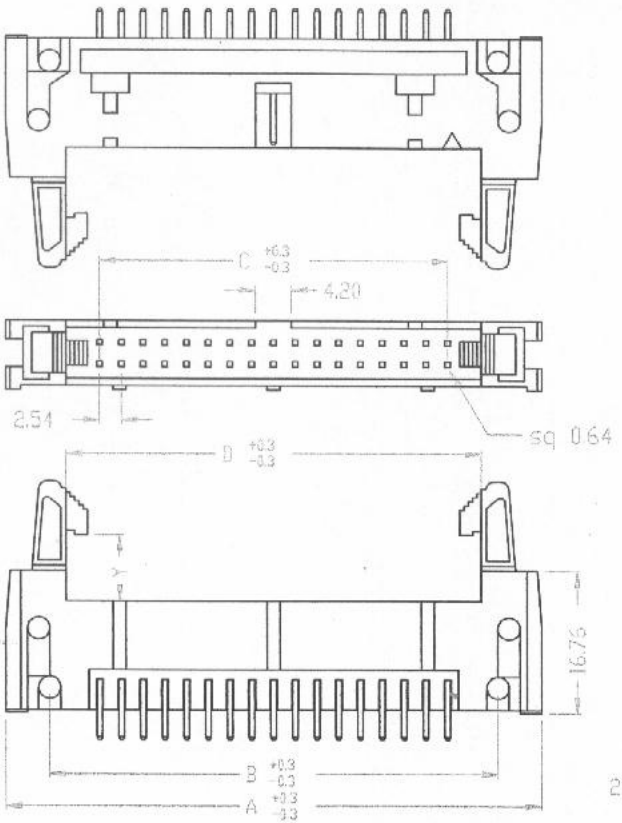



Poles	DIM A	DIM B	DIM C	DIM D
10	32.00	21.84	10.16	17.96
14	37.08	26.92	15.24	23.04
16	39.62	29.46	17.78	25.58
20	44.70	34.54	22.86	30.33
24	49.78	39.62	27.94	35.74
26	52.32	42.16	30.48	38.28
30	57.40	47.24	35.56	43.36
34	62.48	52.32	40.64	48.44
40	70.10	59.94	48.26	56.06
50	82.80	72.64	60.96	68.76
60	93.50	85.34	73.66	81.46
64	00.58	90.42	78.74	86.54

SPECIFICATIONS

MATERIAL:
1. Insulator : PBT Polyestor UL 94-V0
2. Color : Black
3. Contacts : Sq 0.64mm Gold/Tin Sletive Plated

ELECTRICAL:
1. Current Rating : 1.5 AMP
2. Operation Temperature : -40 C° to + 105 C°
3. Contact Resistance : 10 Milliohms MAX
4. Insulation Resistance : 1000 Milliohms MIN
5. Dielectric Withstanding Voltage : 500V AC

Order Information :

	SHORT
Y	4.30
	LONG
Y	7.80

UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN MILLIMETERS TOLERANCE ARE : FRACTION DECIMALS ANGLES
.X ±0.50 .X' ±3.0
.XX ±0.20 .X" ±1.0
.XXX ±0.10 .XX' ±0.5

3rd ANGLE PROJECTION

APPROVALS	DATE
DRAWN LEE	2007/05/01
APPROVED	
VERSION A	SIZE A4
SHEET 1/1	UNIT MM

TITLE: Box Header Ejector Receptacle

PART NO. 2.54-2 Row-Vertical-Ej