

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1813863

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - BASIC

CATALOG LISTING

11SM1-TDRAWING NUMBER
11SM1-T

PAGE 1 OF 1

MISSUE
11

REVISIONS

A	CO22077
GCH	1 DEC 66
B	CO-77768
SAD	12 JUL 94
C	CO-82803-E
DLT	8 JAN 96
D	CO-95172
JJA	17 JUNE 99

REPLACES

RELEASE NO.

CHECK

CHECK

21 DEC 66


LSD

CHECK


GCH 1 DEC 66

FORMTEK
FC-50378

DRAWN

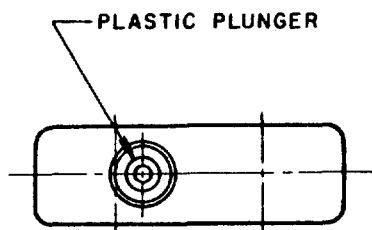

PLASTIC PLUNGER

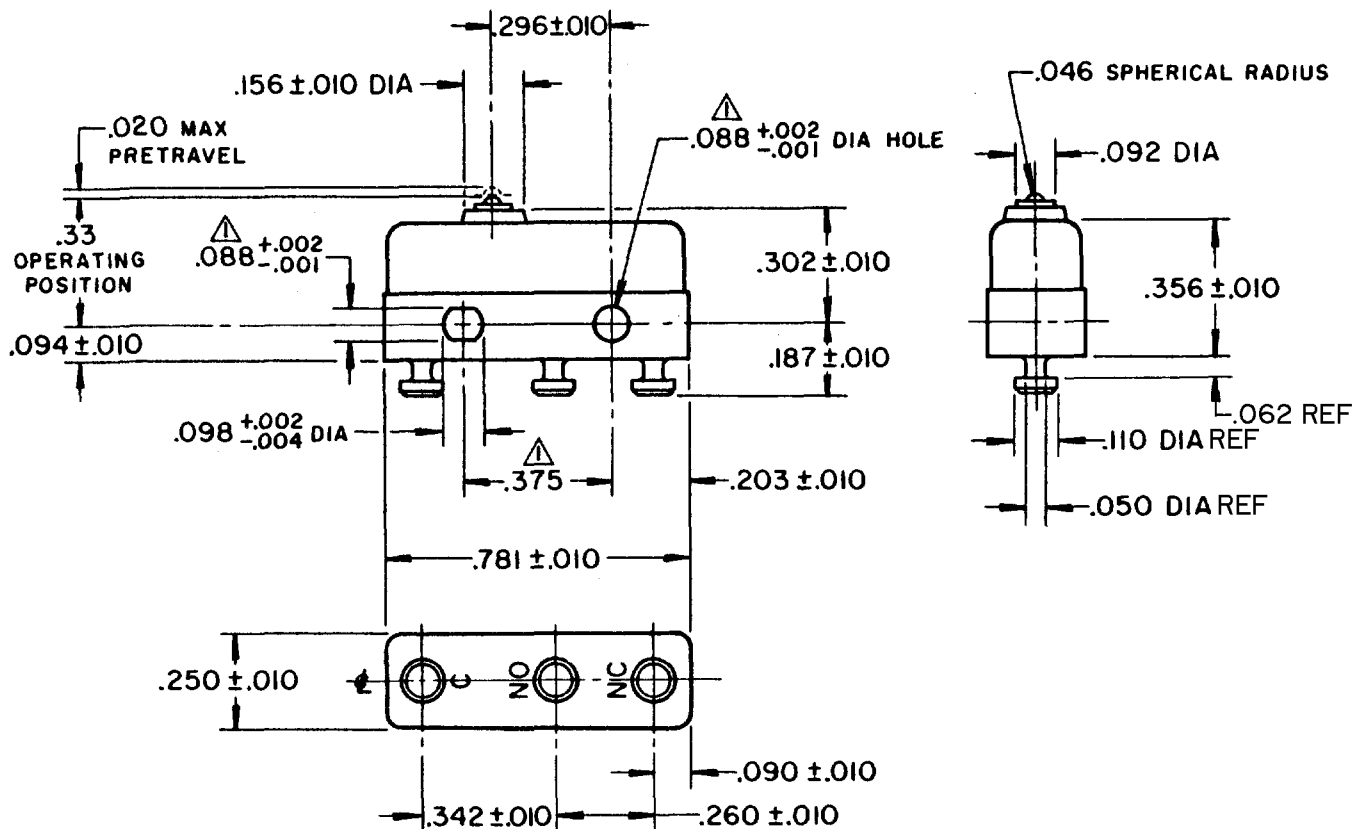

NOTE -

- ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
 OF $.087$ MAX DIA ON $.375 \pm .002$ CENTERS
 2-TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ----- 3-5 OZ

RELEASE FORCE ----- 1 OZ MIN

DIFFERENTIAL TRAVEL ----- .004 MAX

OVERTRAVEL ----- .005 MIN

ELECTRICAL DATACONTACT ARRANGEMENT
S P D T**30 VOLTS DC RATING**

INDUCTIVE	SEA LEVEL	3 AMP
	50,000 FT	2.5 AMP
RESISTIVE	SEA LEVEL	5 AMP
	50,000 FT	5 AMP
MAXIMUM INRUSH		24 AMP

L4

5A 250 VAC ~

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$

WEIGHT .006 LB MAX