

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.


Jameco Part Number 1814217

MICRO SWITCH
a Honeywell Division

FED.MFG.CODE 91929

SWITCH-BASIC

FORMTEK										CATALOG LISTING										11SM1									
DRAWN										ISSUE										M									
1 DEC 66										10										PAGE 1 OF 1									
GCH										CHECK										RELEASE NO									
21 DEC 96										CHECK										REPLACES									

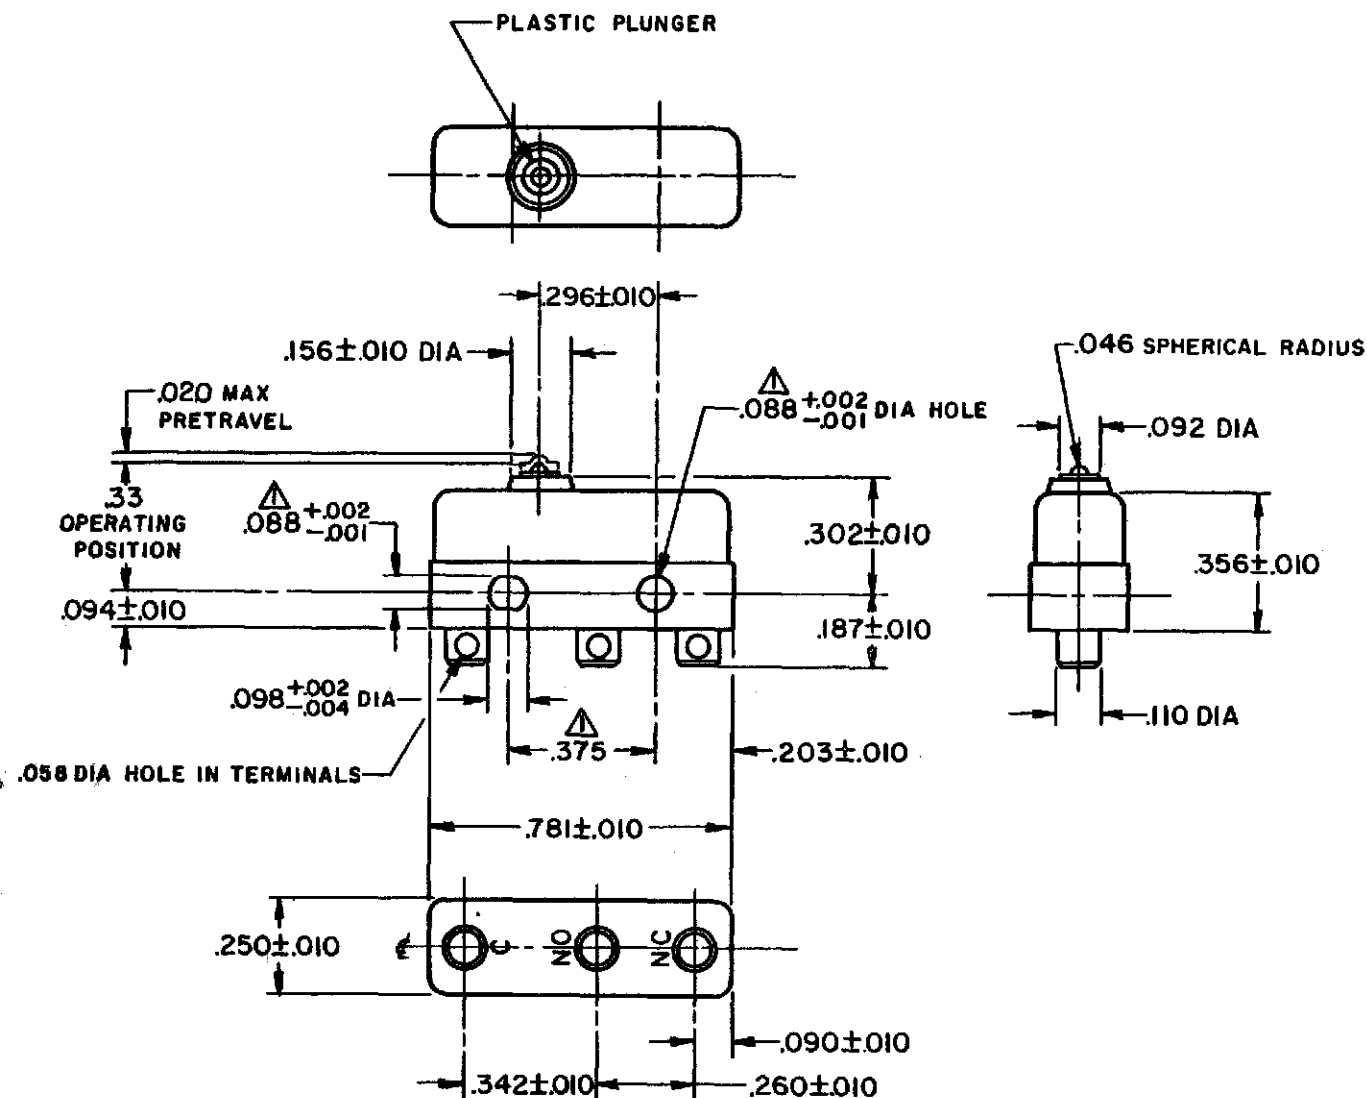


NOTE—

**▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375±.002 CENTERS
2-TERMINALS ARE PLATED FOR SOLDERING**

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA	SCALE 2:1	DO NOT SCALE PRINT
OPERATING FORCE----- 3-5 OZ	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE----- 1 OZ MIN	30 VOLTS DC RATING INDUCTIVE ----- SEA LEVEL ----- 3 AMP 50,000 FT ----- 2.5 AMP RESISTIVE ----- SEA LEVEL ----- 5 AMP 50,000 FT ----- 5 AMP MAXIMUM INRUSH ----- 24 AMP	ONE PLACE (.0) ±.030	
DIFFERENTIAL TRAVEL---- .004 MAX		TWO PLACE (.00) ±.015	
OVERTRAVEL----- .005 MIN		THREE PLACE (.000) ±.005	
	L4 5A 250 VAC ~  	ANGLES ±	
		WEIGHT .006 LB MAX	