

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1818306

MICRO SWITCH

FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

311SX4-T

CATALOG LISTING
311SX4-T
PAGE 1 OF 1

M

DRAWING
NUMBER

ISSUE
X 13
X 3
X 3

REPLACES X41462-SX

RELEASE NO. PR - 861

CHECK

REVISIONS

A 201033
DLT
22 AUG 00
B 0012136
KR
11APR05

11APR05

AK

CHECK

1 MAY 69

DCS

CHECK


19 FEB 69

GFS

RASTER

FO-50378-1A

DRAWN

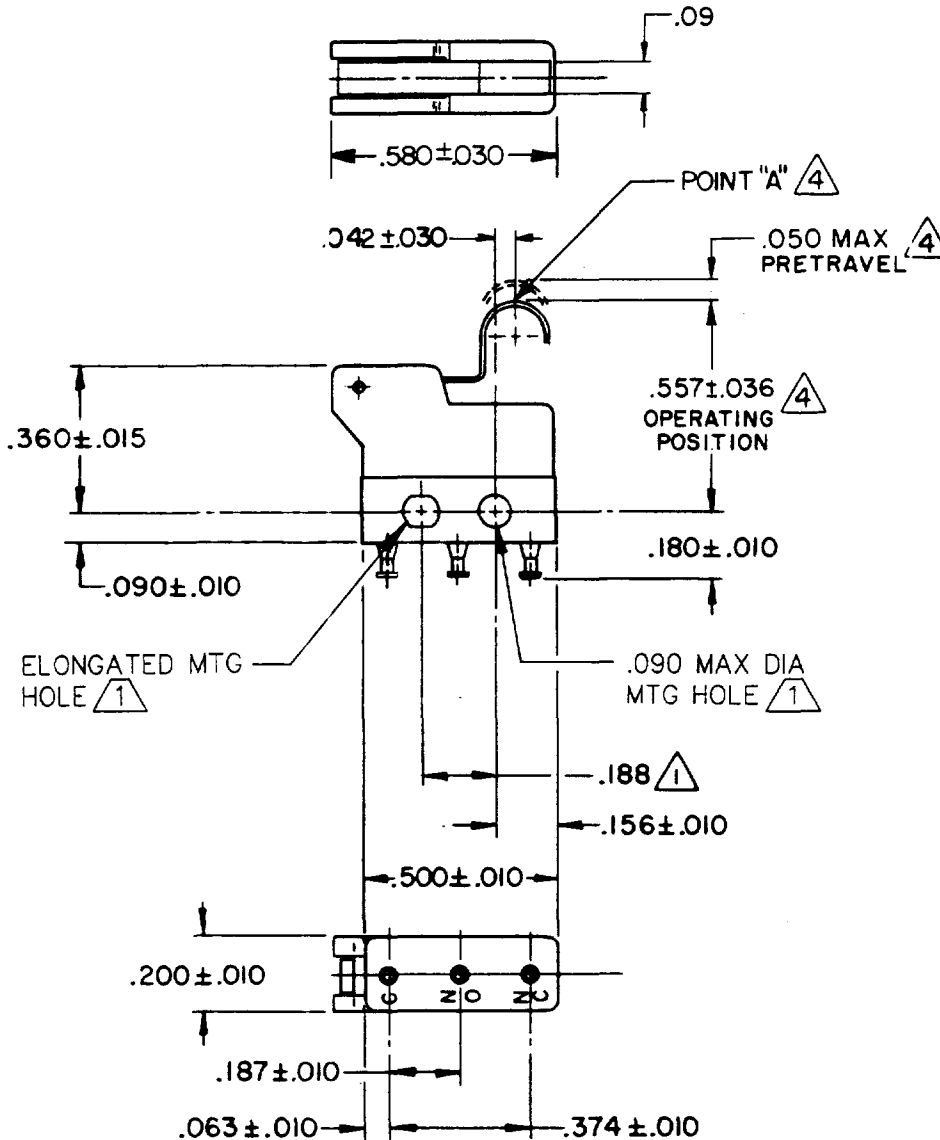

PRODUCT CODE
VDS0040

NOTE-

- (1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
- (4) CHARACTERISTICS ARE TAKEN AT POINT "A"

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS (4)

OPERATING FORCE ----- 60 GRAM MAX
RELEASE FORCE ----- 11 GRAM MIN
DIFFERENTIAL TRAVEL ----- .015 MAX
OVERTRAVEL ----- .010 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

28 VOLTS DC RATING

INDUCTIVE ----- SEA LEVEL ----- 3 AMP
50,000 FT ----- 2 AMP
RESISTIVE ----- SEA LEVEL ----- 5 AMP
50,000 FT ----- 4 AMP

115 VOLTS AC, 60 CPS

INDUCTIVE ----- SEA LEVEL ----- 5 AMP
RESISTIVE ----- SEA LEVEL ----- 5 AMP

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .003 LB MAX

APPROVALS

KEMA, CE

5A 250V ~ T125 5E4



UL, CSA

5A 250 VAC



BRAND
L4L