

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1846260

MICRO SWITCH

A DIVISION OF HONEYWELL-ROBERTSON COMPANY


FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-3AT

BZ-3AT

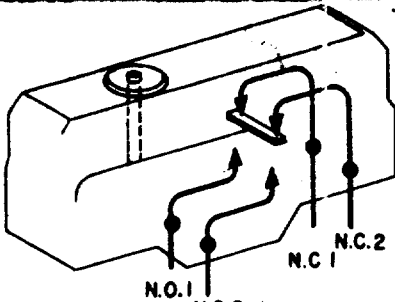

CIRCUIT DIAGRAM

.030 MAX.
PRETRAVEL

±.015
.625
OPERATING
POSITION

.36

±.002
-.001
.140

±.010
.917
.094 DIA.

±.002
-.001
.140 DIA. HOLE

.58

.59

.21

.46

.172 DIA.

1.000
(SEE NOTE 1)

.47

1.94

6-32 UNC X .218^{REF} BINDER
HEAD TERMINAL SCREWS AND
WASHERS (SEMS)

.16

.36

.687

±.010

.68

.17

NOTE -

- 1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX. DIA. ON 1.000 ±.002 CENTERS.
- 2- SUITABLE ONLY FOR APPLICATIONS IMPARTING A RAPID STROKE TO THE SWITCH PLUNGER.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE-----16-26 OZ.

RELEASE FORCE-----4 OZ. MIN.

② DIFFERENTIAL TRAVEL-----.002-.005

OVERTRAVEL-----.005 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT

(SEE CIRCUIT DIAGRAM)

UNDERWRITERS' LAB. INC. LISTED RATING.
15 A-125, 250, OR 480 VAC
-L 73- 1 A-125 VDC; 0.5 A-250 VDC
1/4 HP-125 VAC; 1/2 HP-250 VAC



SCALE-----FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

② ③