

Distributed by:

JAMECO[®]
ELECTRONICS


www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1965445

2.54mm (.100") Pitch KK® Crimp Terminal Housing

2695/6471



Features and Benefits

- Sizes 1 to 25 circuits
- 6471 is end-to-end stackable (2 housings only)
- 2695 version with or without locking ramp and polarizing ribs

Reference Information

Product Specification: PS-10-07
 Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: Molex KK 2.54mm (.100") pitch headers and 0.04mm (.025") pins
 Use With: 2695—2759, 6459 or 41572 terminals
 6471—4809 terminals
 Designed In: Inches

Electrical*

Voltage: 250V
 Current: Phosphor Bronze—4.0A max.
 Brass—2.5A max.
 Dielectric Withstanding Voltage: 1500V AC
 Insulation Resistance: 50K Megohms min.

Mechanical*

Contact Insertion Force: 681g (1.5 lb) max.
 Contact Retention to Housing: 3.63kg (8 lb) min.
 Mating Force: 199g max.
 Unmating Force: 57g min.
 Normal Force: 200g min.

Physical

Housing: Nylon, UL 94V-0
 Operating Temperature: 0 to +75°C

Circuits	Order No.			
	2695			6471
	With Locking Ramp	With Locking Ramp and Polarizing Ribs	Without Locking Ramp or Ribs	With Locking Ramp and Polarizing Ribs†
1			22-01-2011	
2	22-01-2027	22-01-3027	22-01-2021	22-01-2025
3	22-01-2037	22-01-3037	22-01-2031	22-01-2035
4	22-01-2047	22-01-3047	22-01-2041	22-01-2045
5	22-01-2057	22-01-3057	22-01-2051	22-01-2055
6	22-01-2067	22-01-3067	22-01-2061	22-01-2065
7	22-01-2077	22-01-3077	22-01-2071	22-01-2075
8	22-01-2087	22-01-3087	22-01-2081	22-01-2085
9	22-01-2097	22-01-3097	22-01-2091	22-01-2095
10	22-01-2107	22-01-3107	22-01-2101	22-01-2105
11	22-01-2117	22-01-3117	22-01-2111	22-01-2115
12	22-01-2127	22-01-3127	22-01-2121	22-01-2125
13	22-01-2137	22-01-3137	22-01-2131	22-01-2135

Note: When mating polarizing rib version with breakaway friction lock header or polarizing wall series, the end friction lock or polarizing wall of header must be removed

* When mated with Molex product only


† For circuits 19-28, contact Molex

Circuits	Order No.			
	2695			6471
	With Locking Ramp	With Locking Ramp and Polarizing Ribs	Without Locking Ramp or Ribs	With Locking Ramp and Polarizing Ribs†
14	22-01-2147	22-01-3147	22-01-2141	22-01-2145
15	22-01-2157	22-01-3157	22-01-2151	22-01-2155
16	22-01-2167	22-01-3167	22-01-2161	22-01-2165
17	22-01-2177	22-01-3177	22-01-2171	22-01-2175
18	22-01-2187	22-01-3187	22-01-2181	22-01-2185
19	22-01-2197	22-01-3197	22-01-2191	
20	22-01-2207	22-01-3207	22-01-2201	
21	22-01-2217	22-01-3217	22-01-2211	
22	22-01-2227	22-01-3227	22-01-2221	
23	22-01-2237	22-01-3237	22-01-2231	
24	22-01-2247	22-01-3247	22-01-2241	
25	22-01-2257	22-01-3257	22-01-2251	

	Order No.
Polarizing Key	15-04-9209
Polarizing Peg	15-04-9210

2.54mm (.100") Pitch KK® Crimp Terminal Housing

7880 High Pressure



Features and Benefits

- Sizes 1 to 28 circuits
- Standard with locking ramp
- Suitable for high vibration requirements

Reference Information

Product Specification: PS-7879
 Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: Molex KK 2.54mm (.100") pitch headers
 Use With: 7879 terminals
 Designed In: Inches

Electrical*

Voltage: 250V
 Current: 2.5A
 Dielectric Withstanding Voltage: 1500V AC
 Insulation Resistance: 500K Megohms min.

Mechanical*

Contact Insertion Force: 1.5 lb max.
 Contact Retention to Housing: 8 lb min.
 Mating Force: 475g max.
 Unmating Force: 100g min.
 Normal Force: 430g min.

Physical

Housing: Nylon, UL 94V-0
 Operating Temperature: -0 to +75°C

Circuits	Order No.
1	10-11-2013
2	10-11-2023
3	10-11-2033
4	10-11-2043
5	10-11-2053
6	10-11-2063
7	10-11-2073
8	10-11-2083
9	10-11-2093
10	10-11-2103

Circuits	Order No.
11	10-11-2113
12	10-11-2123
13	10-11-2133
14	10-11-2143
15	10-11-2153
16	10-11-2163
17	10-11-2173
18	10-11-2183
19	10-11-2193

Circuits	Order No.
20	10-11-2203
21	10-11-2213
22	10-11-2223
23	10-11-2233
24	10-11-2243
25	10-11-2253
26	10-11-2263
27	10-11-2273
28	10-11-2283

* When mated with Molex product only

Note: In the Far East this housing has a different Engineering Series No. and different Order No.



PRODUCT SPECIFICATION

1.0 SCOPE

This Product Specification covers the 2.54 mm (.100 inch) centerline (pitch) 0.64 mm (.025) square pin headers when mated with either printed circuit board (PCB) connectors or connectors terminated with 22 to 28 AWG wire using crimp technology.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBERS

Crimp Terminals: 2759, 41572, 6459

Crimp Housings: 2695

PCB Connectors: 4455, 42625

Headers: 4030, 4094, 6373, 7478, 42225, 42226, 42227, 42228, 42152, 42153, 42375, 42376, 42377, 42624.

Other products conforming to this specification are noted on the individual drawings.

2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

Terminal Material: Brass or Phos. Bronze (for Max performance use phos bronze material.)

Housing: Nylon or Polyester

Pins: Brass or Phos. Bronze

For more information on dimensions, materials, and plating see the individual drawings.

2.3 SAFETY AGENCY APPROVALS

UL File Number E29179

CSALR19980

3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

None

4.0 RATINGS

4.1 VOLTAGE

250 Volts

4.2 CURRENT AND APPLICABLE WIRES (Current is dependent on connector size, contact material, plating, ambient temperature, printed circuit board characteristics and related factors. Actual current rating is application dependent and should be evaluated for each application.)

AWG	Amps (Max)	Outside Insulation Diameter
22	4.00	See Drawings
24	3.75	See Drawings
26	3.50	See Drawings
28	3.00	See Drawings

4.3 TEMPERATURE (ambient + 30° temp rise)

Operating: 0°C to +75°C

Nonoperating: - 40°C to +105°C

REVISION: P3	ECR/ECN INFORMATION: EC No: UCP2008-0956 DATE: 11/6/2007	TITLE: PRODUCT SPECIFICATION .100 CENTER KK CONNECTORS	SHEET No. 1 of 5
DOCUMENT NUMBER: PS-10-07	CREATED / REVISED BY: ADERR	CHECKED BY: JBELL	APPROVED BY: FSMITH



PRODUCT SPECIFICATION

5.0 PERFORMANCE

5.1 ELECTRICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Contact Resistance (Low Level)	Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA.	10 milliohms MAXIMUM [initial]
Contact Resistance of Wire Termination (Low Level)	Terminate the applicable wire to the terminal and measure wire using a voltage of 20 mV and a current of 100 mA.	2 milliohms MAXIMUM [initial]
Insulation Resistance	Unmate & unmount connectors: apply a voltage of 500 VDC between adjacent terminals and between terminals to ground.	1000 Megohms MINIMUM
Dielectric Withstanding Voltage	Unmate connectors: apply a voltage of {two times the rated voltage plus 1000 volts} VAC for 1 minute between adjacent terminals and between terminals to ground.	No breakdown
Capacitance	Measure between adjacent terminals at 1 MHz.	2 picofarads MAXIMUM
Temperature Rise (via Current Cycling)	Mate connectors: measure the temperature rise at the rated current after: 1) 96 hours (steady state) 2) 240 hours (45 minutes ON and 15 minutes OFF per hour) 3) 96 hours (steady state)	Temperature rise: +30°C MAXIMUM

REVISION: P3	ECR/ECN INFORMATION: EC No: UCP2008-0956 DATE: 11/6/2007	TITLE: PRODUCT SPECIFICATION .100 CENTER KK CONNECTORS	SHEET No. 2 of 5
DOCUMENT NUMBER: PS-10-07	CREATED / REVISED BY: ADERR	CHECKED BY: JBELL	APPROVED BY: FSMITH



PRODUCT SPECIFICATION

5.2 MECHANICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT		
Connector Mate and Unmate Forces	Per circuit when mated to an .025 Sq. pin. Mate and unmate connector (male to female) at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute.	1.95 N (0.438 lbf) MAXIMUM insertion force & 0.56 N (0.125 lbf) MINIMUM withdrawal force		
Terminal Retention Force (in Housing)	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute. (Forces will change with platings and materials.)	17.8 N (4.0 lbf) MINIMUM withdrawal force		
Terminal Insertion Force (into Housing)	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute. (Forces will change with platings and materials.)	6.67 N (1.5 lbf) MAXIMUM insertion force		
Durability	Mate connectors up to 25 cycles at a maximum rate of 10 cycles per minute prior to Environmental Tests.	10 milliohms MAXIMUM (change from initial)		
Vibration (Random)	Mate connectors and vibrate per EIA 364-28, test condition VII.	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond		
Shock (Mechanical)	Mate connectors and shock at 50 g's with $\frac{1}{2}$ sine wave (11 milliseconds) shocks in the $\pm X, \pm Y, \pm Z$ axes (18 shocks total).	10 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond		
Wire Pullout Force (Axial)	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute. (For maximum performance use Molex application tooling with stranded tinned copper wire)	22 awg = 44 N (10 lbf) 24 awg = 35 N (8 lbf) 26 awg = 26 N (6 lbf) 28 awg = 17 N (4 lbf) 30 awg = 13 N (3 lbf)		
Normal Force	Apply a perpendicular force.	2.94 N (300 grams) average		
Kinked PC Pin Insertion Force (into PCB Hole)	Apply an axial insertion force on pins at a rate of 25 ± 6 mm ($1 \pm \frac{1}{4}$ inch) per minute.	Number of kinked pins	Maximum Insertion force (per pin)	Average Insertion force (per pin)
		2	44.0 N (9.9 lbf)	15.1N (3.4 lbf)
		4	21.4 N (4.8 lbf)	9.8 N (2.2 lbf)
		6	18.2 N (4.1 lbf)	4.9 N (1.1 lbf)

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
P3	EC No: UCP2008-0956 DATE: 11/6/2007	PRODUCT SPECIFICATION .100 CENTER KK CONNECTORS	3 of 5
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-10-07	ADERR	JBELL	FSMITH



PRODUCT SPECIFICATION

5.3 ENVIRONMENTAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT										
Shock (Thermal)	Mate connectors; expose to 5 cycles of: <table><tr><th>Temperature °C</th><th>Duration (Minutes)</th></tr><tr><td>-40 +0/-3</td><td>30</td></tr><tr><td>+25 ±10</td><td>5 MAXIMUM</td></tr><tr><td>+105 +3/-0</td><td>30</td></tr><tr><td>+25 ±10</td><td>5 MAXIMUM</td></tr></table>	Temperature °C	Duration (Minutes)	-40 +0/-3	30	+25 ±10	5 MAXIMUM	+105 +3/-0	30	+25 ±10	5 MAXIMUM	10 milliohms MAXIMUM (change from initial) & Visual: No Damage
Temperature °C	Duration (Minutes)											
-40 +0/-3	30											
+25 ±10	5 MAXIMUM											
+105 +3/-0	30											
+25 ±10	5 MAXIMUM											
Thermal Aging	Mate connectors; expose to: 96 hours at 105 ± 2°C	10 milliohms MAXIMUM (change from initial]) & Visual: No Damage										
Humidity (Steady State)	Mate connectors: expose to a temperature of 40 ± 2°C with a relative humidity of 90-95% for 96 hours. Note: Remove surface moisture and air dry for 1 hour prior to measurements.	10 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM & Visual: No Damage										
Humidity (Cyclic)	Mate connectors: cycle per EIA-364-31: 24 cycles at temperature 25 ± 3°C at 80 ± 5% relative humidity and 65 ± 3°C at 50 ± 5% relative humidity; dwell time of 1.0 hour; ramp time of 0.5 hours. {Note: Remove surface moisture and air dry for 1 hour prior to measurements.}	10 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM & Visual: No Damage										
Solderability	Per SMES-152	Solder coverage: 95% MINIMUM (per SMES-152)										

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
P3	EC No: UCP2008-0956 DATE: 11/6/2007	PRODUCT SPECIFICATION .100 CENTER KK CONNECTORS	4 of 5
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-10-07	ADERR	JBELL	FSMITH



PRODUCT SPECIFICATION

5.3 ENVIRONMENTAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
Solder Resistance	Dip connector terminal tails in solder: Solder Duration: 5 ± 0.5 seconds; Solder Temperature: $230 \pm 5^{\circ}\text{C}$	Visual: No Damage to insulator material
Cold Resistance	Mate connectors: Duration: 96 hours; Temperature: $-40 \pm 3^{\circ}\text{C}$	10 milliohms MAXIMUM (change from initial) & Visual: No Damage
Corrosive Atmosphere: Flowing Mixed Gas (FMG)	Test per EIA-364-65, Class II, Exposure to gasses for 4 days, unmated.	10 milliohms MAXIMUM (change from initial) & Visual: No Damage






6.0 PACKAGING

Parts shall be packaged to protect against damage during handling, transit and storage.

7.0 GAGES AND FIXTURES

8.0 OTHER

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
P3	EC No: UCP2008-0956 DATE: 11/6/2007	PRODUCT SPECIFICATION .100 CENTER KK CONNECTORS	5 of 5
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-10-07	ADERR	JBELL	FSMITH

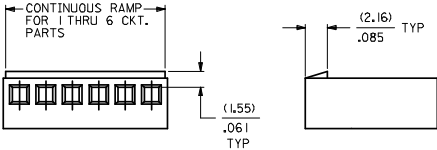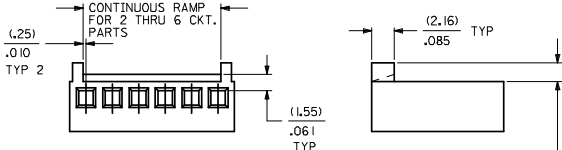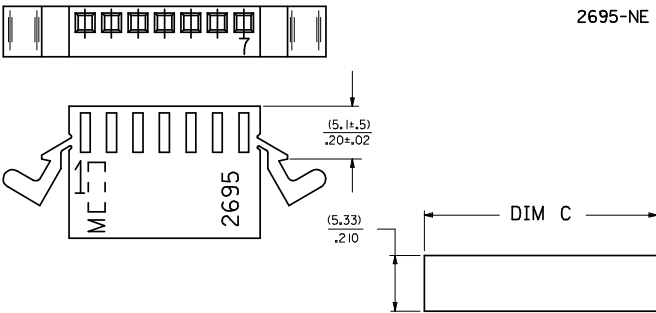
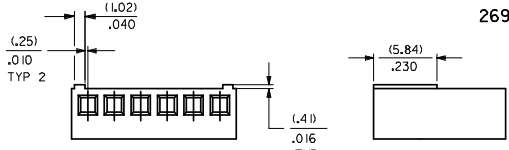
	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
M	NO. OF CKT'S.	DIM. A	DIM. B	DIM. C	2695-NR															
	1	N/A	(3.10) .122	(7.16) .282																
L	2	(2.54+.05) .100+.002	(5.64) .222	(9.70) .382																
	3	(5.08+.05) .200+.002	(8.18) .322	(12.24) .482																
	4	(7.62+.05) .300+.002	(10.72) .422	(14.78) .582																
	5	(10.16+.05) .400+.002	(13.26) .522	(17.32) .682																
K	6	(12.70+.08) .500+.003	(15.80) .622	(19.86) .782																
	7	(15.24+.08) .600+.003	(18.34) .722	(22.40) .882																
	8	(17.78+.08) .700+.003	(20.88) .822	(24.94) .982																
J	9	(20.32+.10) .800+.004	(23.42) .922	(27.48) 1.082																
	10	(22.86+.10) .900+.004	(25.96) 1.022	(30.02) 1.182																
	11	(25.4+.10) 1.000+.004	(28.50) 1.122	(32.56) 1.282																
I	12	(27.94+.13) 1.100+.005	(31.04) 1.222	(35.10) 1.382	2695-NRP															
	13	(30.48+.13) 1.200+.005	(33.58) 1.322	(37.64) 1.482																
H	14	(33.02+.13) 1.300+.005	(36.12) 1.422	(40.18) 1.582																
	15	(35.56+.13) 1.400+.005	(38.66) 1.522	(42.72) 1.682																
	16	(38.10+.15) 1.500+.006	(41.20) 1.622	(45.26) 1.782																
	17	(40.64+.15) 1.600+.006	(43.74) 1.722	(47.80) 1.882																
	18	(43.18+.15) 1.700+.006	(46.28) 1.822	(50.34) 1.982																
G	19	(45.72+.15) 1.800+.006	(48.82) 1.922	(52.88) 2.082																
	20	(48.26+.15) 1.900+.006	(51.36) 2.022	(55.42) 2.182																
	21	(50.80+.18) 2.000+.007	(53.90) 2.122	(57.96) 2.282																
F	22	(53.34+.18) 2.100+.007	(56.44) 2.222	(60.50) 2.382																
	23	(55.88+.18) 2.200+.007	(58.98) 2.322	(63.04) 2.482	2695-NE															
	24	(58.42+.18) 2.300+.007	(61.52) 2.422	(65.58) 2.582																
E	25	(60.96+.20) 2.400+.008	(64.06) 2.522	(68.12) 2.682																
	26	(63.50+.20) 2.500+.008	(66.60) 2.622	(70.66) 2.782																
	27	(66.04+.20) 2.600+.008	(69.14) 2.722	(73.20) 2.882																
	28	(68.58+.20) 2.700+.008	(71.68) 2.822	(75.74) 2.982																
D	29	(71.12+.23) 2.800+.009	(74.22) 2.922	(78.28) 3.082																
	30	(73.66+.23) 2.900+.009	(76.76) 3.022	(80.82) 3.182																
	31	(76.20+.23) 3.000+.009	(79.30) 3.122	(83.36) 3.282																
C	32	(78.74+.23) 3.100+.009	(81.84) 3.222	(85.90) 3.382																
	33	(81.28+.25) 3.200+.010	(84.38) 3.322	(88.44) 3.482																
	34	(83.82+.25) 3.300+.010	(86.92) 3.422	(90.98) 3.582																
	35	(86.36+.25) 3.400+.010	(89.46) 3.522	(93.52) 3.682	RECOMMENDED PANEL OPENING (.157)/.062 THICK															
B	36	(88.90+.25) 3.500+.010	(92.00) 3.622	(96.06) 3.782	2695-NC*															
	37	(91.44+.28) 3.600+.011	(94.54) 3.722	(98.60) 3.882																
A	38	(93.98+.28) 3.700+.011	(97.08) 3.822	(101.14) 3.982																
	39	(96.52+.28) 3.800+.011	(99.62) 3.922	(103.68) 4.082																
	40	(99.06+.28) 3.900+.011	(102.16) 4.022	(106.22) 4.182																

2695 - N *
NO. OF. CIRCUITS

VOID LOCATION
SEE CHART

OPTION CODE

	MOUNTING EARS	RAMP	POLARIZING RIBS	DYED	MAT'L	RETENTION PEG
BLANK	NO	NO	NO	NO	NOTE 1A	NO
E	YES	NO	NO	NO	NOTE 1A	NO
R	NO	YES	NO	NO	NOTE 1A	NO
RP	NO	YES	YES	NO	NOTE 1A	NO
RPD	NO	YES	YES	YES	NOTE 1A	NO
C	NO	NO	NO	NO	NOTE 1A	YES
RP-BK	NO	YES	YES	NO	NOTE 1B	NO

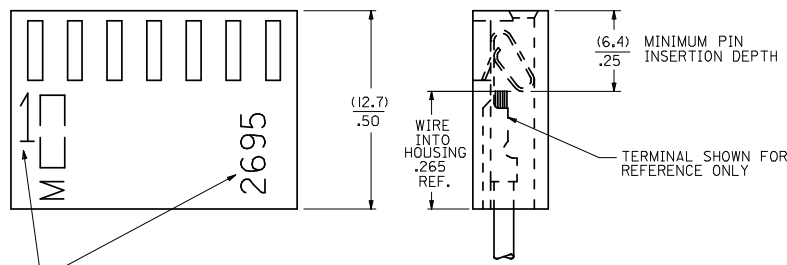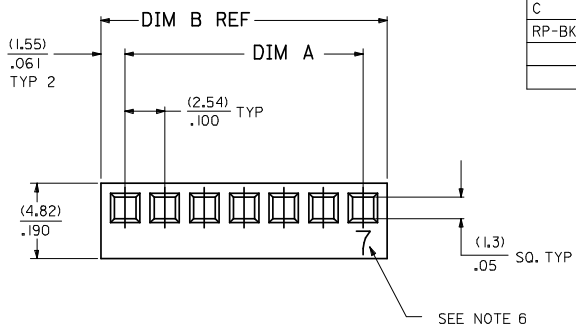

- NOTES
1. MATERIAL: A - NYLON, UL94V-0, COLOR: WHITE
B - NYLON, UL94V-0, COLOR: BLACK
 2. FINISH: SEE TERMINAL DRAWING
 3. THIS HOUSING CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-10-07.
 4. PACKAGING: N/A
 5. HOUSING TO BE USED WITH CRIMP TYPE TERMINAL NUMBER 2759, 22-30 GAUGE WIRE WITH (.157)/.062 DIAMETER MAXIMUM WIRE INSULATION.
 6. LAST CIRCUIT NUMBER TO BE DESIGNATED ON 7 CKTS. AND HIGHER, EXCEPT WHEN "MXI" APPEARS.
 7. CIRCUIT NUMBER "1" AND ENGINEERING NUMBER TO APPEAR ON PARTS 3 CKTS. AND HIGHER.

REVISE CAVITY BOX
REV. NO. UCP2008-2953
DRAWN BY CHIKO
CHECKED BY SMITH
APPROVED BY SMITH
DATE 2008/06/24
DATE 2008/07/01
DATE 2008/07/02

QUALITY SYMBOLS
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± .005
3 PLACES ± .005
2 PLACES ± .013
1 PLACE ± 0.25
ANGULAR ± 1/2°

DIMENSION STYLE
MM/IN

SCALE

INCH

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DRAWN BY PEREZ-ARGUET
CHECKED BY PATEL
APPROVED BY LENZ
DATE 1988/02/25
DATE 1988/02/25
DATE 1988/02/25

TITLE
(2.54)/.100 HOUSING FOR
KK CRIMP TYPE TERMINALS
2695 SERIES DRAWING

MATERIAL NO. SD-2695
DOCUMENT NO.

SHEET NO. 1 OF 3

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
	2695-N			2695-NE			2695-NR			2695-NRP			2695-NRPD			2695-NRP-BK				
	PART NO.	ENG NO.	VOID	PART NO.	ENG NO.	VOID	PART NO.	ENG NO.	VOID	PART NO.	ENG NO.	VOID	PART NO.	ENG NO.	VOID	PART NO.	ENG NO.	VOID		
	22-01-2011	2695-1			2695-1E			2695-1R			N/A	2695-1RP		N/A	2695-1RPD			50-29-1557	2695-2RP-BK	
	22-01-2021	2695-2		22-01-2022	2695-2E			2695-2R			22-01-3027	2695-2RP			2695-2RPD			50-29-1558	2695-3RP-BK	
	22-01-2031	2695-3		22-01-2032	2695-3E			2695-3R			22-01-3037	2695-3RP			2695-3RPD			50-29-1559	2695-4RP-BK	
	22-01-2041	2695-4			2695-4E			2695-4R			22-01-3047	2695-4RP			2695-4RPD			50-29-1560	2695-5RP-BK	
	22-01-2051	2695-5			2695-5E			2695-5R			22-01-3057	2695-5RP		22-32-2051	2695-5RPD			50-29-1561	2695-6RP-BK	
	22-01-2061	2695-6			2695-6E			2695-6R			22-01-3067	2695-6RP			2695-6RPD			50-29-1562	2695-7RP-BK	
	22-01-2071	2695-7		22-01-2072	2695-7E			2695-7R			22-01-3077	2695-7RP			2695-7RPD			50-29-1563	2695-8RP-BK	
	22-01-2081	2695-8			2695-8E			2695-8R			22-01-3087	2695-8RP			2695-8RPD			50-29-1564	2695-9RP-BK	
	22-01-2091	2695-9			2695-9E			2695-9R			22-01-3097	2695-9RP			2695-9RPD			50-29-1565	2695-10RP-BK	
	22-01-2101	2695-10			2695-10E			2695-10R			22-01-3107	2695-10RP		22-32-2101	2695-10RPD			50-29-1566	2695-11RP-BK	
	22-01-2111	2695-11			2695-11E			2695-11R			22-01-3117	2695-11RP			2695-11RPD			50-29-1567	2695-12RP-BK	
	22-01-2121	2695-12			2695-12E			2695-12R			22-01-3127	2695-12RP			2695-12RPD			50-29-1568	2695-13RP-BK	
	22-01-2131	2695-13			2695-13E			2695-13R			22-01-3137	2695-13RP			2695-13RPD			50-29-1569	2695-14RP-BK	
	22-01-2141	2695-14			2695-14E			2695-14R			22-01-3147	2695-14RP			2695-14RPD			50-29-1570	2695-15RP-BK	
	22-01-2151	2695-15			2695-15E			2695-15R			22-01-3157	2695-15RP			2695-15RPD			50-29-1571	2695-16RP-BK	
	22-01-2161	2695-16			2695-16E			2695-16R			22-01-3167	2695-16RP			2695-16RPD			50-29-1572	2695-17RP-BK	
	22-01-2171	2695-17			2695-17E			2695-17R			22-01-3177	2695-17RP			2695-17RPD			50-29-1573	2695-18RP-BK	
	22-01-2181	2695-18			2695-18E			2695-18R			22-01-3187	2695-18RP			2695-18RPD			50-29-1574	2695-19RP-BK	
	22-01-2191	2695-19			2695-19E			2695-19R			22-01-3197	2695-19RP			2695-19RPD			50-29-1575	2695-20RP-BK	
	22-01-2201	2695-20			2695-20E			2695-20R			22-01-3207	2695-20RP			2695-20RPD			50-29-1576	2695-21RP-BK	
	22-01-2211	2695-21			2695-21E			2695-21R			22-01-3217	2695-21RP			2695-21RPD			50-29-1577	2695-22RP-BK	
	22-01-2221	2695-22			2695-22E			2695-22R			22-01-3227	2695-22RP			2695-22RPD			50-29-1578	2695-23RP-BK	
	22-01-2231	2695-23			2695-23E			2695-23R			22-01-3237	2695-23RP			2695-23RPD			50-29-1579	2695-24RP-BK	
	22-01-2241	2695-24			2695-24E			2695-24R			22-01-3247	2695-24RP			2695-24RPD			50-29-1580	2695-25RP-BK	
	22-01-2251	2695-25			2695-25E			2695-25R			22-01-3257	2695-25RP			2695-25RPD			50-29-1581	2695-26RP-BK	
	22-01-2261	2695-26			2695-26E			2695-26R			22-01-3267	2695-26RP			2695-26RPD			50-29-1582	2695-27RP-BK	
	22-01-2271	2695-27			2695-27E			2695-27R			22-01-3277	2695-27RP			2695-27RPD			50-29-1583	2695-28RP-BK	
	22-01-2281	2695-28			2695-28E			2695-28R			22-01-3287	2695-28RP			2695-28RPD					
	22-01-2291	2695-29			2695-29E			2695-29R				2695-29RP			2695-29RPD					
		2695-30			2695-30E			2695-30R				2695-30RP			2695-30RPD					
		2695-31			2695-31E			2695-31R				2695-31RP			2695-31RPD					
		2695-32			2695-32E			2695-32R				2695-32RP			2695-32RPD					
	22-01-2331	2695-33			2695-33E			2695-33R		22-01-2337	2695-33R				2695-33RPD					
		2695-34			2695-34E			2695-34R			2695-34R				2695-34RPD					
		2695-35			2695-35E			2695-35R			2695-35R				2695-35RPD					
		2695-36			2695-36E			2695-36R			2695-36R				2695-36RPD					
		2695-37			2695-37E			2695-37R			2695-37R				2695-37RPD					
		2695-38			2695-38E			2695-38R			2695-38R				2695-38RPD					
		2695-39			2695-39E			2695-39R			2695-39R				2695-39RPD					
		2695-40			2695-40E			2695-40R			2695-40R				2695-40RPD					

	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
	2695-NC*																				
	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS	PART NO.	ENG. NO.	VOIDS
M	N/A	2695-1C																			M
		2695-2C																			
		2695-3C																			
		2695-4C																			
		2695-5C																			
		2695-6C																			
L		2695-7C																			L
		2695-8C																			
		2695-9C																			
		2695-10C																			
		2695-11C																			
		2695-12C																			
K		2695-13C																			K
		2695-14C																			
		2695-15C																			
		2695-16C																			
		2695-17C																			
		2695-18C																			
J		2695-19C																			J
		2695-20C																			
		2695-21C																			
		2695-22C																			
		2695-23C																			
		2695-24C																			
I		2695-25C																			I
		2695-26C																			
		2695-27C																			
		2695-28C																			
		2695-29C																			
		2695-30C																			
		2695-31C																			
H		2695-32C																			H
		2695-33C																			
		2695-34C																			
		2695-35C																			
		2695-36C																			
		2695-37C																			
G		2695-38C																			G
		2695-39C																			
		2695-40C																			
F																					F
E																					E
D																					D
C																					C
B																					B
A																					A

UPDATE TITLE BLOCK

REC NO: UCP2006-1024

DESIGNER: KIRWNAUER

CHKDLSCHMIT

APPROVED: H

REV

DESCRIPTION

QUALITY SYMBOLS

▽=0

▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

mm

INCH

4 PLACES ± --- ± ---

3 PLACES ± --- ± ---

2 PLACES ± --- ± ---

1 PLACE ± --- ± ---

ANGULAR ±1/2°

DIMENSION STYLE

MM/IN

DRAWN BY: DATE

CHECKED BY: DATE

APPROVED BY: DATE

MATERIAL NO.

DOCUMENT NO.

SIZE D

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE

DESIGN UNITS

INCH

THIRD ANGLE PROJECTION

(2.54)/100 HOUSING FOR KK CRIMP TYPE TERMINALS 2695 SERIES DRAWING

MOLEX MOLEX INCORPORATED

SD-2695

SHEET NO. 3 OF 3