

Distributed by:

JAMECO[®]
ELECTRONICS


www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 2037464

2.00mm (.079") Pitch Milli-Grid™ Header

87831 Shrouded Vertical, SMC



Features and Benefits

- Sizes 4 to 50 circuits
- Fully shrouded to protect pins during mating/unmating
- Center slot for polarization
- Front latches for mechanical locking
- Center polarization slot (6 to 12 circuits); center polarization slot and front latches (14 to 50 circuits)

Reference Information

Product Specification: PS-87831-027
Packaging: Tube (contact Molex for embossed tape)
UL File No.: E29179
CSA File No.: LR19980
Mates With: 50394, 51110 and 87568
Designed In: Millimeters

Electrical

Voltage: 125V
Current: 2.0A
Dielectric Withstanding Voltage: 1000V
Insulation Resistance: 1000 Megohms min.


Physical

Housing: Black 4/6 nylon, UL 94V-0
Contact: Phosphor Bronze
Plating: See Table
Operating Temperature: -55 to +105°C

Circuits	Order No.		Lead-free
	15μ" Select Gold	30μ" Select Gold	
4	87831-0420	87831-0421	Yes
6	87831-0620	87831-0621	
8	87831-0820	87831-0821	
10	87831-1020	87831-1021	
12	87831-1220	87831-1221	
14	87831-1420	87831-1421	
16	87831-1620	87831-1621	
18	87831-1820	87831-0621	
20	87831-2020	87831-2021	
22	87831-2220	87831-2221	
24	87831-2420	87831-2421	
26	87831-2620	87831-2621	
Circuits	Order No.		Lead-free
	15μ" Select Gold	30μ" Select Gold	
28	87831-2820	87831-2821	Yes
30	87831-3020	87831-3021	
32	87831-3220	87831-3221	
34	87831-3420	87831-3421	
36	87831-3620	87831-3621	
38	87831-3820	87831-3821	
40	87831-4020	87831-4021	
42	87831-4220	87831-4221	
44	87831-4420	87831-4421	
46	87831-4620	87831-4621	
48	87831-4820	87831-4821	
50	87831-5020	87831-5021	

2.00mm (.079") Pitch Milli-Grid™ Header

87832 Shrouded SMT



Features and Benefits

- Sizes 4 to 50 circuits
- Fully shrouded to protect pins during mating/unmating
- Center slot for polarization
- Front latches for mechanical locking
- Locating pegs for automatic insertion process
- Center polarization slot (6 to 12 circuits); center polarization and front latches (14 to 50 circuits)
- Contact Molex for embossed tape

Reference Information

Product Specification: PS-87831-027
Packaging: Tube (contact Molex for tape and reel)
UL File No.: E29179
CSA File No.: LR19980
Mates With: 50394, 51110 and 87568
Designed In: Millimeters

Electrical

Current: 2.0A
Dielectric Withstanding Voltage: 1000V
Insulation Resistance: 1000 Megohms min.

Physical

Housing: Black 4/6 nylon, UL 94V-0
Contact: Phosphor Bronze
Plating: See Table
Operating Temperature: -55 to +105°C

Circuits	Order No.		Lead-free
	15μ" Select Gold	30μ" Select Gold	
4	87832-0420	87832-0421	Yes
6	87832-0620	87832-0621	
8	87832-0820	87832-0821	
10	87832-1020	87832-1021	
12	87832-1220	87832-1221	
14	87832-1420	87832-1421	
16	87832-1620	87832-1621	
18	87832-1820	87832-1821	
20	87832-2020	87832-2021	
22	87832-2220	87832-2221	
24	87832-2420	87832-2421	
26	87832-2620	87832-2621	
Circuits	Order No.		Lead-free
	15μ" Select Gold	30μ" Select Gold	
28	87832-2820	87832-2821	Yes
30	87832-3020	87832-3021	
32	87832-3220	87832-3221	
34	87832-3420	87832-3421	
36	87832-3620	87832-3621	
38	87832-3820	87832-3821	
40	87832-4020	87832-4021	
42	87832-4220	87832-4221	
44	87832-4420	87832-4421	
46	87832-4620	87832-4621	
48	87832-4820	87832-4821	
50	87832-5020	87832-5021	



PRODUCT SPECIFICATION

1.0 SCOPE

This specification covers the performance requirements for Milli-Grid 2mm Dual Row Shrouded Headers.

2.0 PRODUCT DESCRIPTION

2.1 Product covered by this specification are for series number

Product Name	Part Number
MGrid Headers (Vertical)	87831 Series
MGrid Headers (SMT)	87832 Series
MGrid Headers (R/A)	87833 Series

These series mate with Molex :

- a. Milli-Grid 2mm Grid Wire to Board Connector, Crimp Receptacle Housing, 51110 series and Crimp Terminal, 50394 series.
- b. 2mm Milli-Grid Dual Row IDT, 87568 series.

2.2 For dimensions, materials & plating, refer to the appropriate product drawings.

2.3 Safety Agency Approvals:

UL File Number : E29179
CSA File Number : LR19980

3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

The following documents are part of this specification to the extent specified herewith. In the event of conflict between the requirements of this specification and the product drawing, the product drawing shall take precedence. In the event of conflict between the requirements of this specification and reference documents, this specification shall take the precedence.

MIL-STD-202 Test Methods for Electrical and Electronic Component Parts.

MIL-STD-1344 Test Methods of Electrical Connector

Reference Product Specifications

PS-51110-001 Milli-Grid 2mm Grid Wire to Board Connector

PS-87568-004 2mm Milli-Grid Dual Row IDT Receptacle

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
A1	EC No: S2006-0204 DATE: 2005/08/08	MILLIGRID 2MM DUAL ROW SHROUDED HEADERS	1 of 3
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-87831-027	YLQIAO 2005/08/08	BOKOK 2005/08/23	PTLIM 2005/08/23



PRODUCT SPECIFICATION

4.0 RATINGS

- 4.1 Voltage : 125
- 4.2 Current : 2.00 Amp MAXIMUM
- 4.3 Operating Temperature : -55°C to +105°C

5.0 PERFORMANCE

5.1 ELECTRICAL REQUIREMENTS

ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
1	Insulation Resistance	Apply 500 VDC for 1 minute per MIL-STD -1344A, METHOD 3003.1	1000 Megaohms Minimum
2	Dielectric Strength	1000 Vrms for 1 minute between adjacent terminals.	No breakdown

5.2 MECHANICAL REQUIREMENTS


ITEM	DESCRIPTION	TEST CONDITION	REQUIREMENT
3	Pin/ Terminal Retention Force (in Housing)	Apply an axial load on the terminal in the housing to dislodge the terminals from the connector at a rate of 0.50 inch per minute	Retention Force: 850 g Min per pin. (Before heat soldering)

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
A1	EC No: S2006-0204 DATE: 2005/08/08	MILLIGRID 2MM DUAL ROW SHROUDED HEADERS	2 of 3
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-87831-027	YLQIAO 2005/08/08	BOKOK 2005/08/23	PTLIM 2005/08/23



PRODUCT SPECIFICATION

5.3 ENVIROMENT REQUIREMENTS

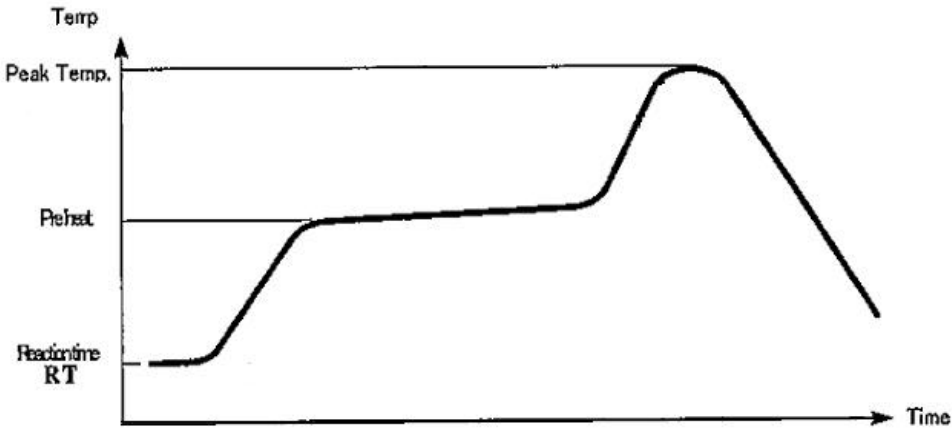4.	Solderability	Solder Time: 5 +/-0.5 secs. Solder Temperature: 260+/- 5°C	95% of the immersed area must show no voids, pin holes.
5.	Resistance to Soldering Heat (Through Hole)	Solder tail to be dipped in flux as per MIL-STD-202F method 210 condition B. Solder Temperature: 260 +/- 5°C Solder Time: 10 +/- 1 secs	No damage in appearance of the connector
6.	Resistance to IR reflow heat (SMT)	Pass product through IR machine for 3 cycles of the following reflow profile: Average Ramp Rate 3°C/sec max. Preheat Temp. (Min.) 150 °C Preheat Temp. (Max.) 200°C Preheat Time 60 – 180 sec Ramp to Peak 3°C/sec max. Time over liquidus (217°C) 60 – 150 sec Peak Temperature 260 +/-5°C Time within 5°C of peak 20 – 40 sec. Ramp – Cool Down 6°C/sec max. Time 25°C to Peak 8 mins max.	No damage in appearance of the connector
	<u>Reflow Temperature Profile</u> 		

6.0 Packaging

Product shall be packed in either Tube or Tape & Reel and protected against damage during handling, transportation and storage.

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
A1	EC No: S2006-0204 DATE: 2005/08/08	MILLIGRID 2MM DUAL ROW SHROUDED HEADERS	3 of 3
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-87831-027	YLQIAO 2005/08/08	BOKOK 2005/08/23	PTLIM 2005/08/23

10

9

8

7

6

5



4

3


2

1

TUBE PACKAGING

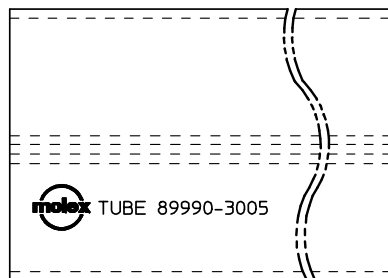


MOLEX LOGO & TUBE
P/N: 89990-3005
(ON THE LEFT HAND SIDE
OF TUBE).

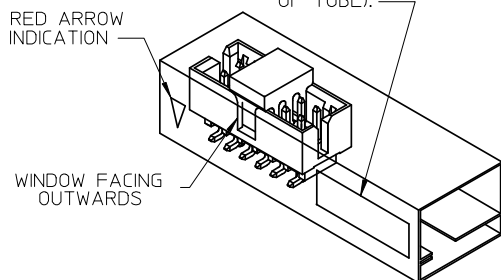

REF : ORIENTATION OF PART IN TUBE.
(FOR THE REFERENCE OF PART/TUBE ASSEMBLY.)


NOTES:

1. LEADER AND TRAILER TAPE

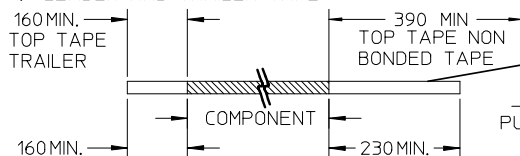

TAIL PART (EMPTY) LEADER PART (EMPTY)



2. PEELING OFF FORCE OF THE TOP TAPE: 20-80gf.
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)



3. PACKAGING STANDARD IS AS PER EIA-481.

EMBOSSED CARRIER TAPE LAYOUT

24 CKT USE FOR ILLUSTRATION ONLY

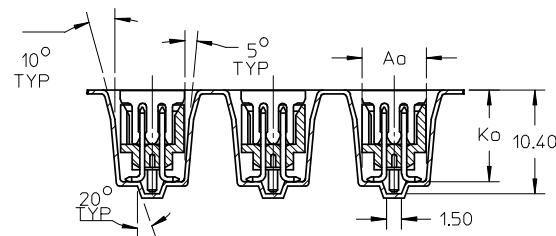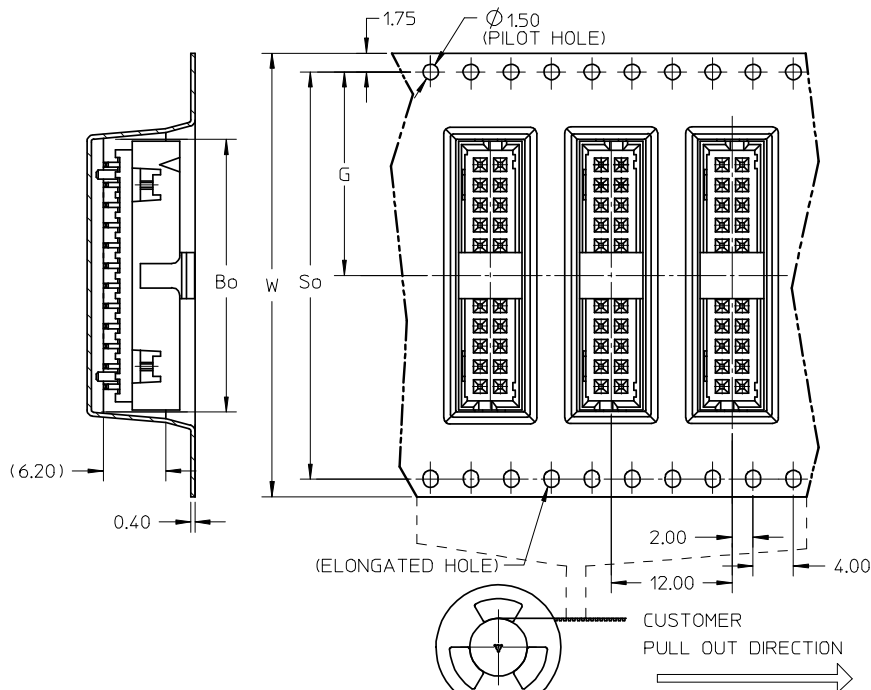

ADD 878326622 PDR#1755				QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
EC NO: S2008-0680				DESCRIPTION		mm INCH		DRAWN BY DATE		TITLE MGRID, SHROUDED HEADER SMT, W/PEGS/CAP FOR PICK & PLACE IN TUBE AND T&R			
2008/02/15				▽=0		4 PLACES ± --- ± ---		ATSEE 2003/10/14					
DRWN:ATSEE						3 PLACES ± --- ± ---		CHECKED BY DATE					
CHKD:SKANG						2 PLACES ± 0.2 ± ---		KCL ING 2003/11/07					
2008/02/18						1 PLACE ± --- ± ---		APPROVED BY DATE		MOLEX MOLEX INCORPORATED			
APPR:MLONG						ANGULAR ± 3 °		SKTOH 2003/11/07					
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
								SEE TABLE		SD-87832-006		2 OF 3	
A8				REV				SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

9

8

7

6

5

4

3

2

1

	10	9	8	7	6	5	4	3	2	1											
F	PLS REFER TO PART 87832-**08 FOR CENTER LOCKING SLOT OPTION.					LEG OPTION	P/N W/O CAP IN TUBE	P/N W/CAP IN TUBE	P/N W/CAP IN TAPE & REEL	CKT SIZE	DIMENSION						F				
											W	G	Bo	So	Ao	Ko					
E						NO	87832-0420	87832-0422	87832-5122	4	16.00	7.50	7.15	-----	6.40	9.30	E				
						YES	87832-0620	87832-0622	87832-5222	6	24.00	11.50	9.15	-----	6.40	9.30					
						YES	87832-0820	87832-0822	87832-5322	8	24.00	11.50	11.05	-----	6.40	9.30					
						YES	87832-1020	87832-1022	87832-5422	10	24.00	11.50	13.05	-----	6.40	9.30					
						YES	87832-1220	87832-1222	87832-5522	12	32.00	14.20	15.15	28.40	6.85	9.30					
						YES	87832-1420	87832-1422	87832-5622	14	32.00	14.20	17.05	28.40	6.40	9.30					
						YES	87832-1620	87832-1622	87832-5722	16	32.00	14.20	19.05	28.40	6.40	9.30					
						YES	87832-1820	87832-1822	87832-5822	18	44.00	20.20	21.05	40.40	6.40	9.30					
						YES	87832-2020	87832-2022	87832-5922	20	44.00	20.20	23.05	40.40	6.40	9.30					
						YES	87832-2220	87832-2222	87832-6022	22	44.00	20.20	25.05	40.40	6.40	9.30					
						YES	87832-2420	87832-2422	87832-6122	24	44.00	20.20	27.05	40.40	6.40	9.30					
						YES	87832-2620	87832-2622	87832-6222	26	44.00	20.20	29.05	40.40	6.40	9.30					
D						YES	87832-2820	87832-2822	87832-6322	28	56.00	26.20	31.05	52.40	6.40	9.30	D				
						YES	87832-3020	87832-3022	87832-6422	30	56.00	26.20	33.05	52.40	6.40	9.30					
						YES	87832-3220	87832-3222	-----	32	-----	-----	-----	-----	-----	-----					
						YES	87832-3420	87832-3422	87832-6622	34	56.00	26.20	37.05	52.40	6.40	9.30					
						YES	87832-3620	87832-3622	-----	36	-----	-----	-----	-----	-----	-----					
						YES	87832-3820	87832-3822	-----	38	-----	-----	-----	-----	-----	-----					
						YES	87832-4020	87832-4022	87832-6922	40	56.00	26.20	43.05	52.40	6.40	9.30					
						YES	87832-4220	87832-4222	-----	42	-----	-----	-----	-----	-----	-----					
						YES	87832-4420	87832-4422	87832-7122	44	56.00	26.20	46.80	52.40	6.40	9.30					
						YES	87832-4620	87832-4622	87832-7222	46	56.00	26.20	47.05	52.40	6.40	9.30					
						YES	87832-4820	87832-4822	-----	48	-----	-----	-----	-----	-----	-----					
						YES	87832-5020	87832-5022	87832-7422	50	72.00	34.20	53.05	68.40	6.40	9.30					
C											C										
B											B										
A											A										
ADD 878326622 PDR#1755 EC NO: S2008-0680 2008/02/15 DRWN:ATSEE CHKD:SKANG 2008/02/15 APPR:MLONG 2008/02/18 DESCRIPTION QUALITY SYMBOLS ▽=0 ◻=0 GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.2 ± --- 1 PLACE ± --- ± --- ANGULAR ± 3 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS DIMENSION STYLE MM ONLY DRAWN BY DATE ATSEE 2003/10/14 CHECKED BY DATE KCL ING 2003/11/07 APPROVED BY DATE SKTOH 2003/11/07 MATERIAL NO. SEE TABLE SCALE NTS TITLE MGRID, SHROUDED HEADER SMT, W/PEGS/CAP FOR PICK & PLACE IN TUBE AND T&R DESIGN UNITS METRIC THIRD ANGLE PROJECTION MOLEX INCORPORATED SD-87832-006 SHEET NO. 3 OF 3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION <tr><td>tb_frame_A3_P_AM_T</td><td>9</td><td>8</td><td>7</td><td>6</td><td>5</td><td>4</td><td>3</td><td>2</td><td>1</td><td></td></tr>											tb_frame_A3_P_AM_T	9	8	7	6	5	4	3	2	1	
tb_frame_A3_P_AM_T	9	8	7	6	5	4	3	2	1												