

MATERIALS


1. CONTACT: BRASS
2. INSULATOR: PBT (UL 94V-0)
3. CONTACT PLATING: GOLD OVER NICKEL

ORDER INFORMATION PART NUMBER :
2012-254-1xxx-RG

SPECIFICATION

1. INSULATOR RESISTANCE: 5000M ohms Min
2. CURRENT RATING: 3 Amps
3. DIELECTRIC WITHSTANDING VOLTAGE: AC 500V
4. OPERATING TEMPERATURE: -45°C TO +105°C

NO. of contek = Code
101(1 PIN) TO 140(40 PIN)

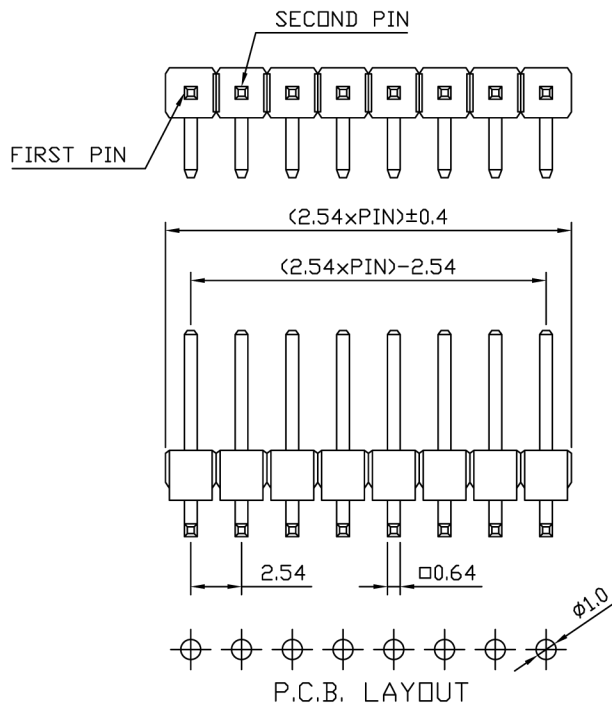

P.C.B. LAYOUT

Top Willing

TITLE

PIN HEADER PITCH=2.54mm Right Angle

DWG.NO.

PH1XXR

SCALE

SHEET

1 OF 1

UNIT

MM

APP.

LISA

CHK.

JACKY

DR.

DAVID

GENERAL TOLERANCE UNLESS SPECIFIED

LINEAR

0.0±0.30

ANGLES

0.00±0.20

±1°



REV