

## FEATURES:

- Universal Adapter Cable used with Pomona Universal Adapter Kits, models 5698 and 5748.

## MATERIALS:

*Coupler Shell (each end):* Brass, Nickel Plated


*Coupler Conductor:* Phosphor Bronze, Gold Plated

*Strain Relief Boot:* PVC Black

*Cable:* RG58C/U, O.D.: 0.195"

*Frequency:* DC – 1.2GHz.

*Impedance:* 50 Ohms

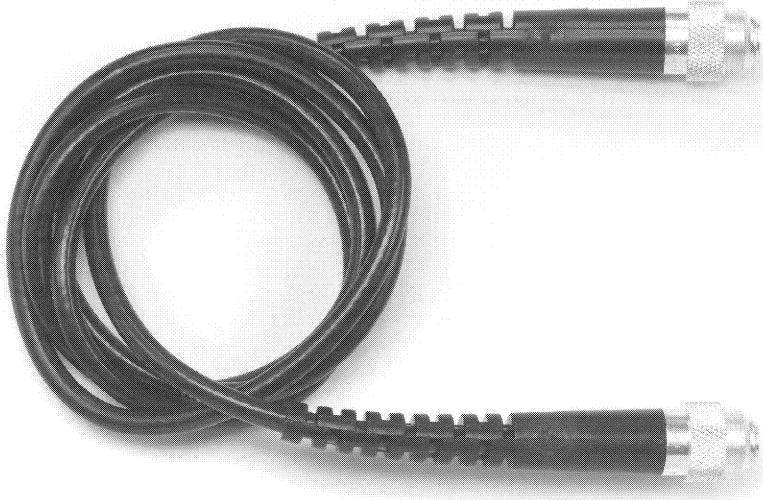

## RATINGS:

*Operating Voltage:* Hands free usage in controlled voltage environments: 500 Vrms maximum. *For CE compliance:* not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

*Operating Temperature:* +122°F (+50°C) Max.

## ORDERING INFORMATION: Model 5749-Length

**Length** =: 24" (60,96cm), 36" (91,44cm), 48" (121,92cm), 60" (152.40cm) & 72" (182,88cm)

*Order Example:* 5749-48 (Cable ONLY, 48")

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02"$  (.51 mm), .xxx =  $\pm .005"$  (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.