


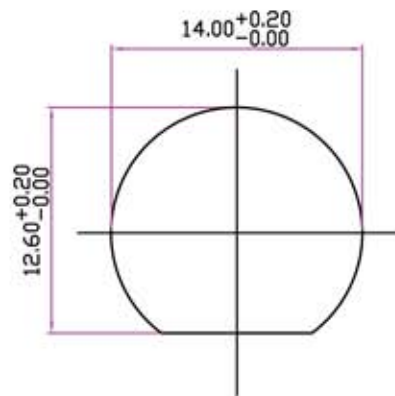






PANEL CUT-OUT

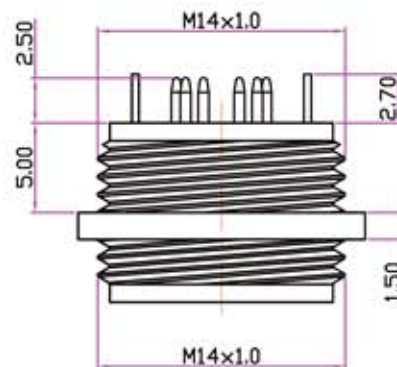

P.C.B. LAYOUT

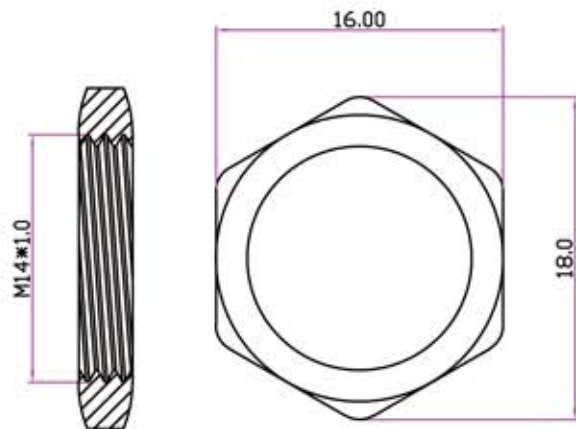

NUT

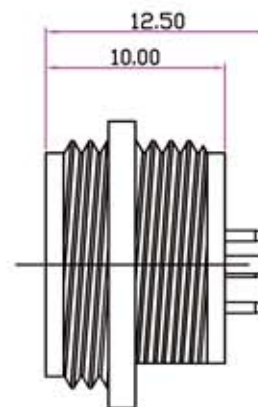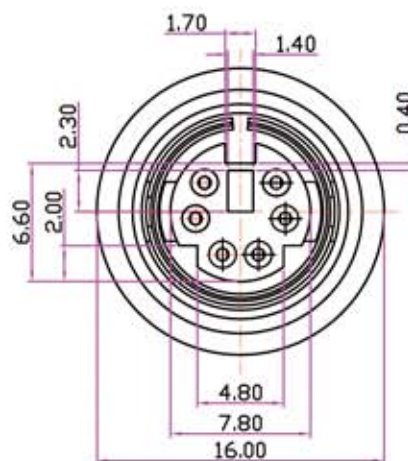

Specifications
rating :

100V AC 1A MAX or 12V DC 2A MAX

contact resistance :

30mΩ MAX

Insulation resistance :

MIN 50MΩ at 250V DC

voltage withstand :

250V AC, 1 minute

flammability :

UL94V-0 rated

1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. SHELL : BRASS
 - 1-4. NUT : PBT UL94V-0 ; COLOR : BLACK
2. FINISH :
 - 2-1. CONTACT : SILVER 30u" ON OVER ALL
UNDER PLATE : NICKEL
 - 2-2. SHELL : NICKEL PLATED 60u" ~ 100u" OVER ALL

CIC COMPONENTS IND. CO., LTD.

品名: ITEM :	6P MINI DIN JACK FOR PCB			 一般公差 X +/- 0.3 XX +/- 0.20	SHEET: 	單位: unit:	mm	日期: date:	'07/01/23	繪圖: drwn by:	DanielShyr
料號: PART NO.	2076762	圖號: DRW NO.	☒			比例: scale:	1 : 2	版本: version:	V. 1.0	核准: aprvid by:	SkyShyr