


◀120X120X25mm Series▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,.

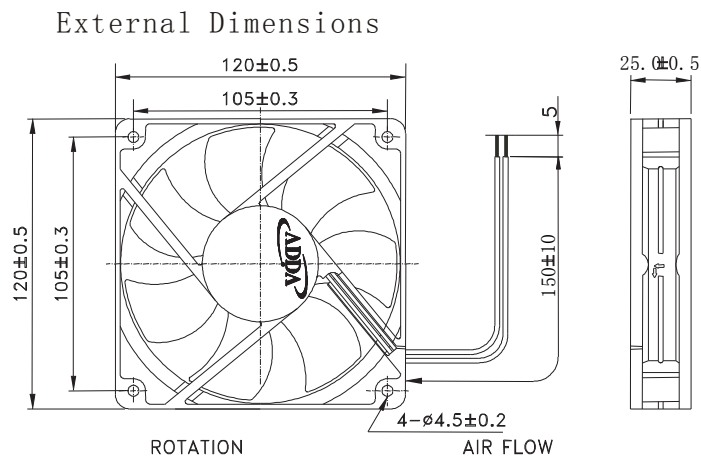


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL1007AWG24
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:12V,24V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications (Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball※=Sleeve○=1B1S●=Hypro bearing												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		Noise Level (dB/A)	Weight (g)
120X120X25	AD1212DB-A71GL	◎※●	12	0.13	1.56	1500	1.586	56.30	0.063	1.57	24.7	156
	AD1212LB-A71GL	◎※●	12	0.24	2.88	1800	2.028	72.00	0.095	2.37	34.4	
	AD1212MB-A71GL	◎※●	12	0.33	3.96	2050	2.344	83.21	0.119	2.97	38.0	
	AD1212HB-A71GL	◎※●	12	0.37	4.44	2200	2.499	88.71	0.138	3.45	39.1	
	AD1212UB-A71GL	◎※●	12	0.50	6.00	2500	2.792	99.12	0.175	4.38	43.3	
	AD1224LB-A71GL	◎※●	24	0.14	3.36	1800	2.028	72.00	0.095	2.37	34.4	
	AD1224MB-A71GL	◎※●	24	0.17	4.08	2050	2.344	83.21	0.119	2.97	38.0	
	AD1224HB-A71GL	◎※●	24	0.19	4.56	2200	2.499	88.71	0.138	3.45	39.1	
	AD1224UB-A71GL	◎※●	24	0.25	6.00	2500	2.792	99.12	0.175	4.38	43.3	
Specifications subject to change without notice.												

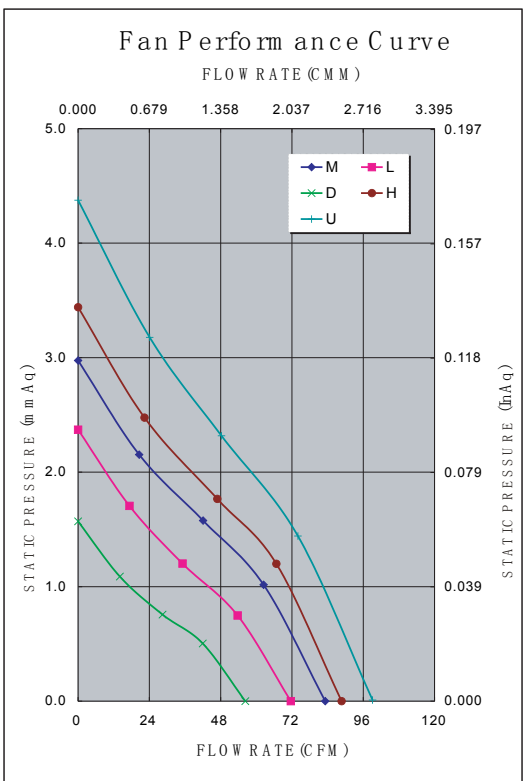


*Motor protective circuit and third lead wire functions


0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓	✓			✓		✓	

*Safety approvals


					
✓	✓		✓	✓	



◀120X120X32mm Series▶

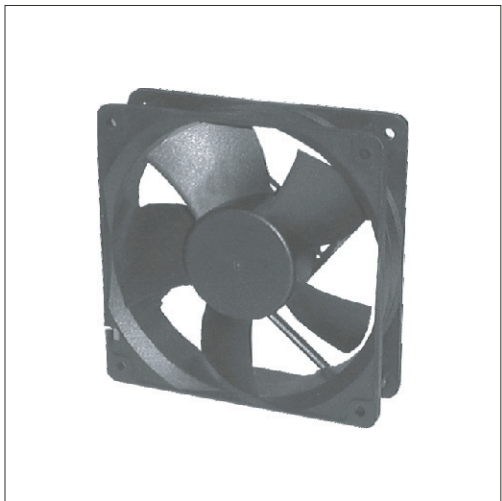

Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,.

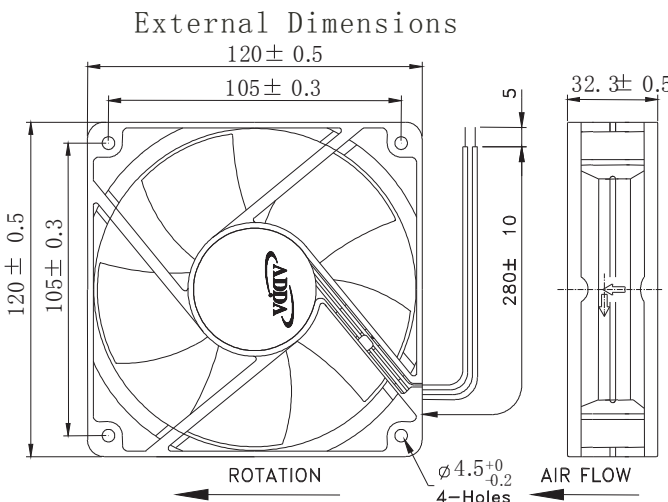


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL1007AWG24
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:12V,24V,48V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications (Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball※=Sleeve○=1B1S●=Hypro bearing												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		Noise Level (dB/A)	Weight (g)
120X120X32	AD1212DB-Y51	◎※●	12	0.12	1.44	1450	1.642	58.30	0.077	1.93	26.9	213
	AD1212LB-Y51	◎※●	12	0.21	2.52	2000	2.355	83.60	0.140	3.51	36.2	
	AD1212MB-Y51	◎※●	12	0.28	3.36	2400	2.746	97.50	0.202	5.05	41.1	
	AD1212HB-Y51	◎※●	12	0.40	4.80	2750	3.042	108.00	0.218	5.46	43.3	
	AD1212UB-Y51	◎	12	0.58	6.96	3200	3.685	130.80	0.312	7.80	48.4	
	AD1224LB-Y51	◎※●	24	0.18	4.32	2000	2.355	83.60	0.140	3.51	36.2	
	AD1224MB-Y51	◎※●	24	0.22	5.28	2400	2.746	97.50	0.202	5.05	41.1	
	AD1224HB-Y51	◎※●	24	0.25	6.00	2750	3.042	108.00	0.218	5.46	43.3	
	AD1248HB-Y51	◎※●	48	0.15	7.20	2750	3.042	108.00	0.218	5.46	43.3	
	AD1248UB-Y51	◎	48	0.21	10.08	3200	3.685	130.80	0.312	7.80	48.4	
Specifications subject to change without notice.												

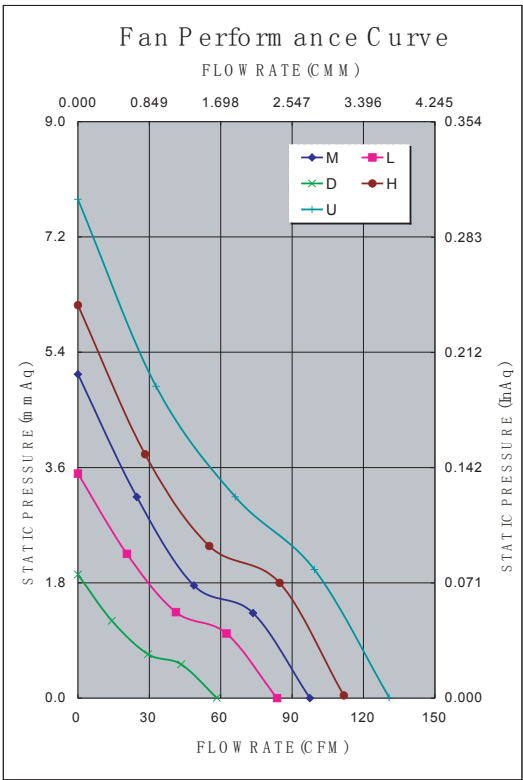

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓	✓			✓		✓	

*Safety approvals

					
✓	✓		✓	✓	

