


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XMCOLOR
HOUSING & PLUNGER: MOLDED NYLON. AVAILABLE IN TEN COLORS.
CONTACT BLADE: GOLD PLATED BeCu.
SPRING: STAINLESS STEEL.
2. P/N: W-200/COLOR
22AWG TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.
3. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: HANDHELD: 33VAC/60VDC
HANDS FREE: 1000 W.V.D.C.
MAXIMUM TEMPERATURE: 176°F (80°C)

LTR	REVISIONS		
	DESCRIPTION	DATE	APPROVED

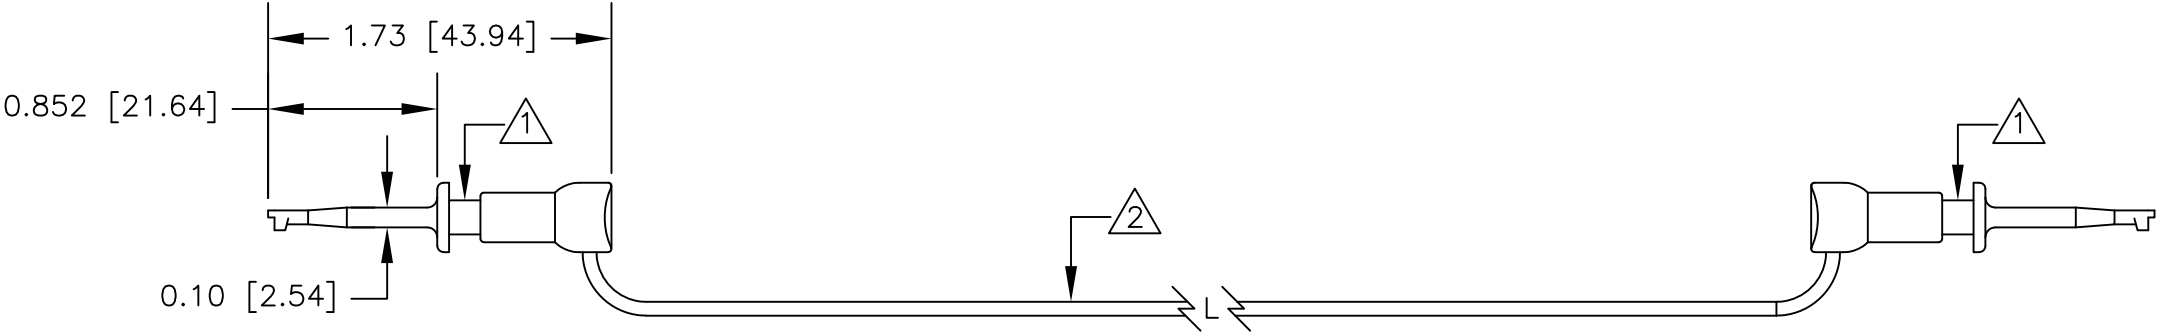

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ±	CONTRACT NO.		E-Z-HOOK[®] DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.				
				APPROVALS	DATE	DESCRIPTION MICRO—HOOK (XM) JUMPER			
				DRAWN	R.L.				
		MATERIAL SEE NOTE.	APPROVED BY						
		FINISH SEE NOTE.			SIZE CODE IDENT NO. DRAWING NO. REV. B 08505 204XM				
NEXT ASSY	USED ON								
APPLICATION		DO NOT SCALE DRAWING			SCALE		1:1	SHEET 1 OF 1	