

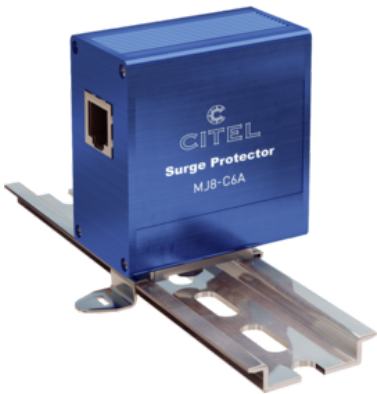




- Cat.5,5E and Cat.6 Surge Protector
- Hybrid GDT and Diode Technology
- 10/100/1000Mbps Compatible
- Bi-Directional Protection
- Shielded Connector Configurations
- DIN Rail, Screw Lug, and Flange Mounting



G: 3-electrode GDT
DBC: 3-pole Low capacitance diode

Electrical Characteristics		
DATA SPD TYPE		UL497B LISTED
VOLTS	(V)	6
WIRES		8W+Shield+Ground
LINE CURRENT MAX	(A)	1.6
POWER RATING	(W)	95
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MCOV	(V)	8/72/72
IMAX8/20µs	(kA)	16
Iimp10/350µs	(kA)	0.500
Mechanical Characteristics		
TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		Single C6A Line
CONNECTOR TYPE		Shielded RJ45
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DIMENSIONS		See diagram (mm)
Standards		
UL STANDARD		UL497B
UL CATEGORY		QVGQ
UL FILE NUMBER		E184939
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
581540		