

UL PC MH 125 G



Sample image

Order symbol : UL PC MH 125 G

Product nr : 8714319


Description : UL Enclosure, PC

Remarks : Grey cover

EAN : 6418074054838

El. number :

- Denmark : 8212031212

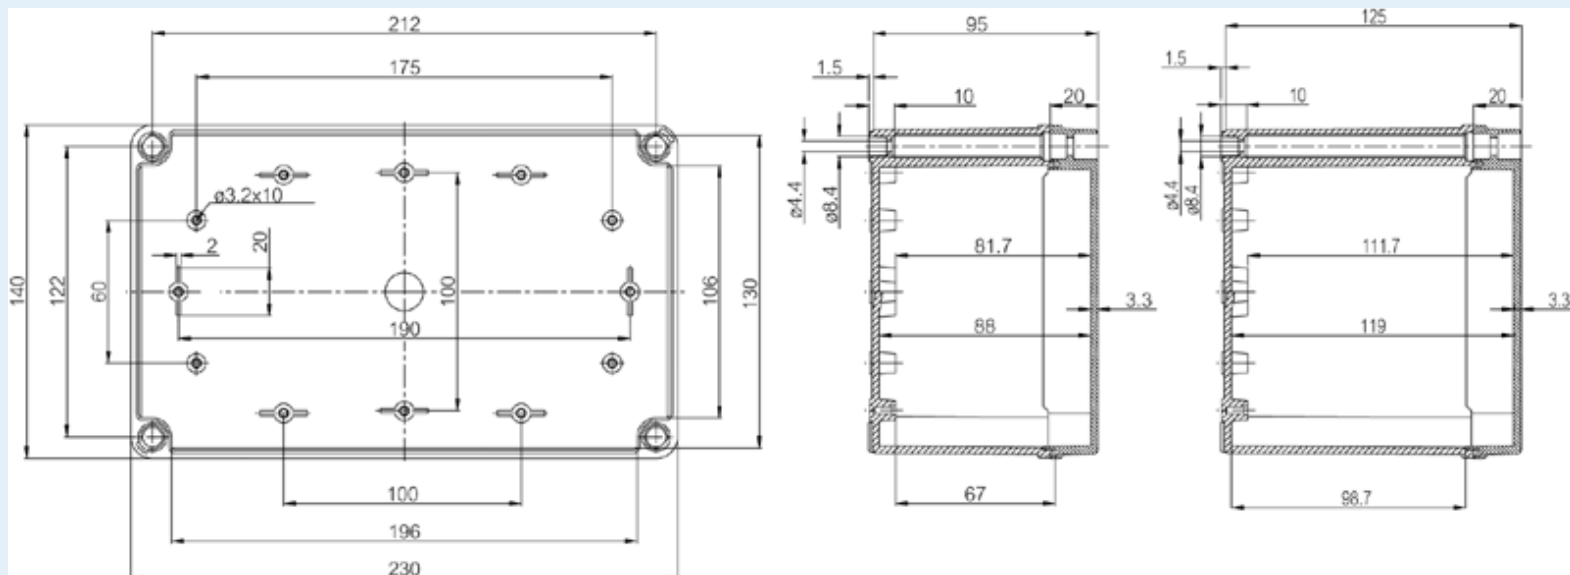

Dimensions :

	Height	Width	Depth
mm :	230	140	125
inch :	9.06	5.51	4.92

Materials :

Ratings :

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes

Material :	Polycarbonate
Base colour :	RAL 7035 -light grey
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

UV resistance :	UL 508
Flammability Rating :	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C :	960 °C
NEMA Class	Type 1, 4X, 6, 12 or 13

Temperatures :

Temperature °C (short term) :	-40 ... 120
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

Certificates :

SGSFIMKO_PICC_pc