



FIBOX
Enclosing innovations



Including : Cabinet base, door with PUR gasket, 3mm double bit lock(s) with key, screws for mounting plate/DIN-rail and corner plugs.

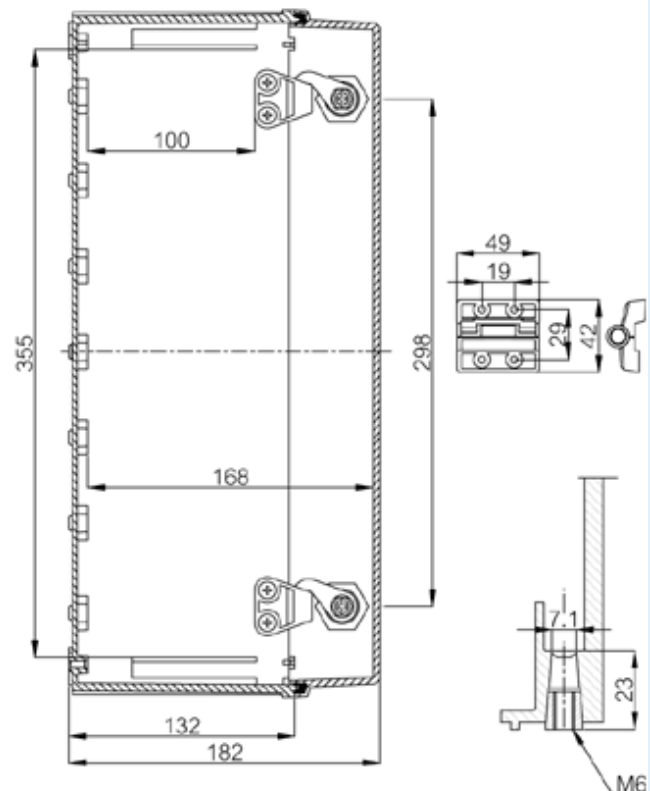

Accessories :

mm :	400	300	180
inch :	15.75	11.81	7.09

Materials :			
Material :	Polycarbonate		
Base colour :	RAL 7035 -light grey		
Cover colour :	RAL 7035 -light grey		
Gasket material :	Polyurethane		

Temperatures :			
Temperature °C (short term) :	-40 ... 120		
Temperature °C (continuous) :	-40 ... 80		
Temperature °F (short term) :	-40 ... 250		
Temperature °F (continuous) :	-40 ... 175		

DRF 43/44	DIN rail frame set, for enclosures:
MB 12225 AL	Swing door set
EKIV 37	DIN-35 Mounting rail, for enclosures: (366 x 35 x 1)
EKIV 27	DIN-35 Mounting rail, for enclosures: (266 x 35 x 1)
EKIV 43 PL	Mounting plate, plastic, for enclosures: (370 x 270 x 2)
EKIV 43	Mounting plate, for enclosures: (370 x 270 x 1)
FP A 43	Swing-out door/Front plate (aluminium), for enclosures: (268 x 368 x 1)

Ratings :			
Ingress protection (EN 60529):	IP65;		
Impact Resistance (EN 62262):	IK08;		
electrical_insulation :	Totally insulated		
Halogen free (DIN/VDE 0472, Part 815) :	Yes		
UV resistance :	UL 508		
Flammability Rating :	UL 746C 5"		
Glow Wire Test (IEC 695-2-1) °C :	960 °C		

Certificates :			
Certificate FI 40854			