

# CAB PC 604022 T3B

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol :** CAB PC 604022 T3B

**Product nr :** 8113072

UL Code : 8143072

UL Name : UL CAB PC 604022 T3B

**Description :** Cabinet, PC, Smoked transparent door


**Remarks :** Locks on the long side

**EAN :** 6418074020475

**El. number :**

- Finland : 3424178
- Denmark : 8212019292
- Sweden : 2539959

**Including :** Cabinet base, door with PUR gasket, 3mm double bit lock(s) with key, screws for mounting plate/DIN-rail and corner plugs.

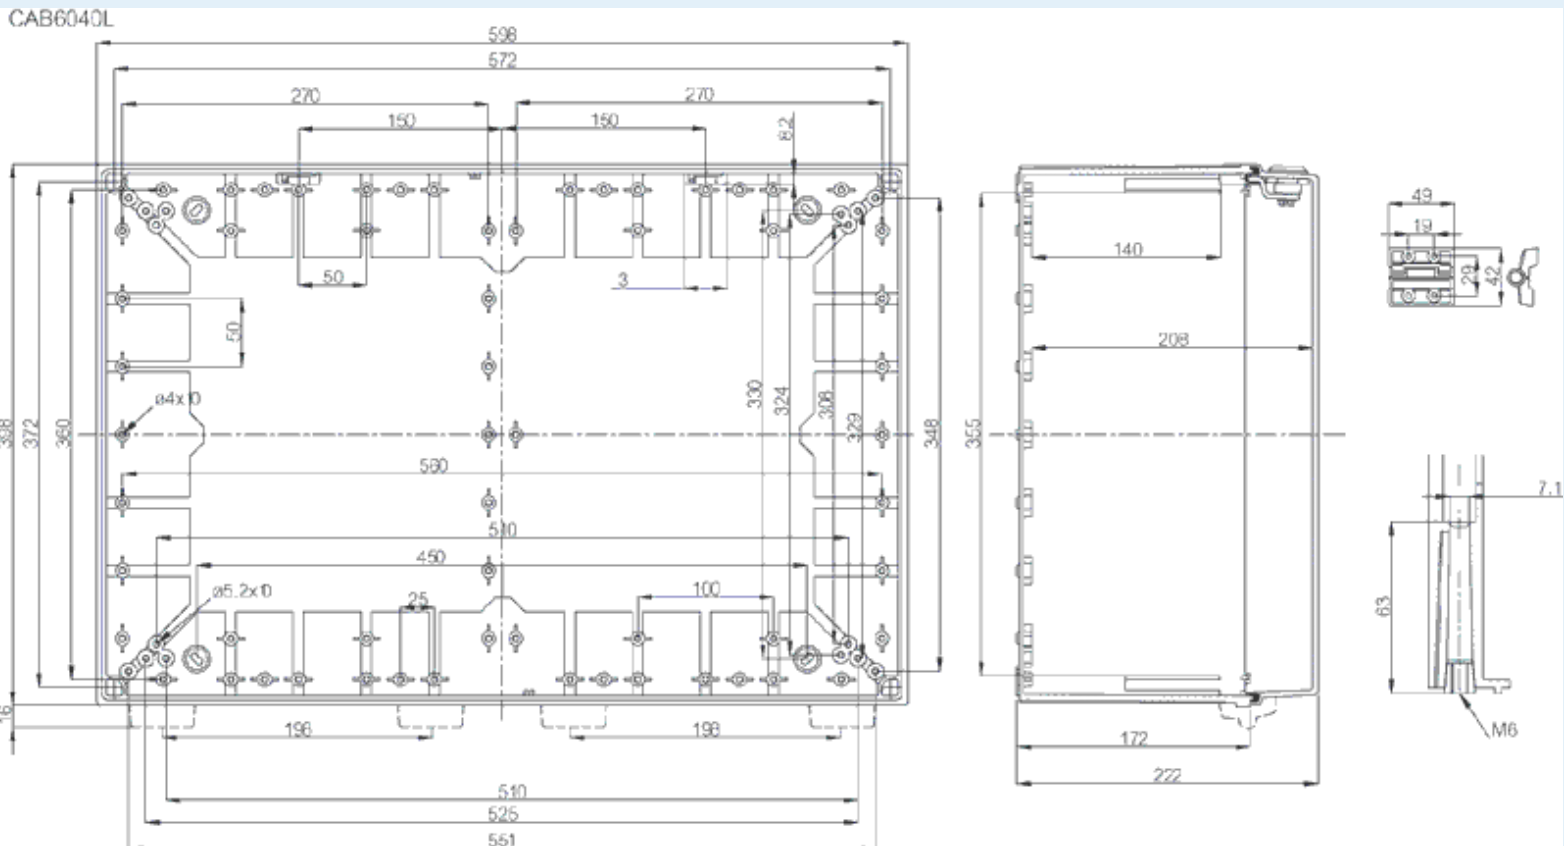

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm :         | 600    | 400   | 220   |
| inch :       | 23.62  | 15.75 | 8.66  |

| Materials :       |                      |
|-------------------|----------------------|
| Material :        | Polycarbonate        |
| Base colour :     | RAL 7035 -light grey |
| Cover colour :    | Clear transparent    |
| Gasket material : | Polyurethane         |

| Temperatures :                |             |
|-------------------------------|-------------|
| Temperature °C (short term) : | -40 ... 120 |
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (short term) : | -40 ... 250 |
| Temperature °F (continuous) : | -40 ... 175 |

| Ratings :                               |                   |
|-----------------------------------------|-------------------|
| Ingress protection (EN 60529):          | IP65;             |
| Impact Resistance (EN 62262):           | IK08;             |
| electrical_insulation :                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes               |
| UV resistance :                         | UL 508            |
| Flammability Rating :                   | UL 746C 5"        |
| Glow Wire Test (IEC 695-2-1) °C :       | 960 °C            |

| Certificates :       |
|----------------------|
| Certificate FI 40854 |