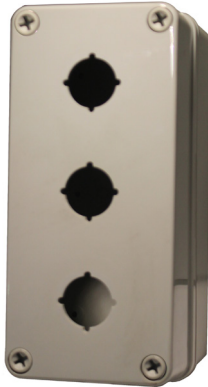



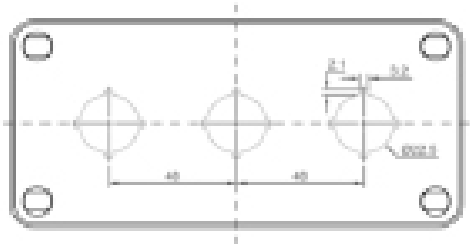
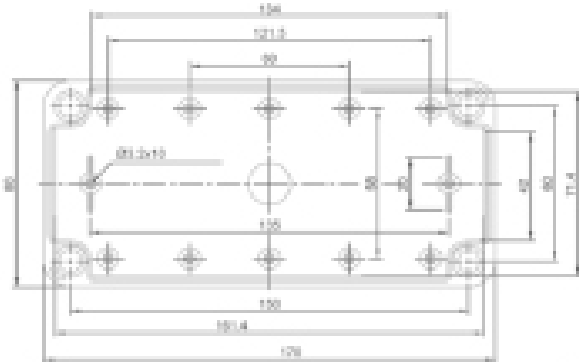
Product Card: ULPBPC D 85 G 2

Sample Image

PC enclosure with two 22.5 mm push button cut outs. Including: Base with screws for mounting plate, cover with PUR gasket and polyamide cover screws.

Product nbr:	8754308
Description:	Enclosure, PC
Remarks:	3 x 22.5 mm cut out
Package:	
Unit:	
Product group:	PICCOLO PC & PBPC
EAN:	6418074001979
SSTL number:	3423403
Electric No. Sweden:	536804
ETIM:	EC002621 EC002621

Installation position: Upright on a wall, pole or frame

Ratings:	
NEMA Class:	NEMA 1, 4X, 6, 12, 13
Ingress Protection (EN 60529):	IP66/67
Impact Resistance (EN 62262):	IK 08
Electrical insulation:	Fully Insulated
Halogen free (DIN/VDE 0472, Part815):	1
UV Resistance:	UL 508
Flammability Rating	U 746C 5"
Glow Wire Test (IEC 695-2-1) °C:	960
Certificates:	SGS Fimko



Dimensions:	
Length (inch):	6.7
Width (inch):	3.2
Depth (inch):	3.4
Length (mm):	170.0
Width (mm):	80.0
Depth (mm):	85.0

Fibox Enclosures
www.fiboxusa.com
 410.760.9696
sales@fiboxusa.com