



FIBOX
Enclosing innovations



Including : Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

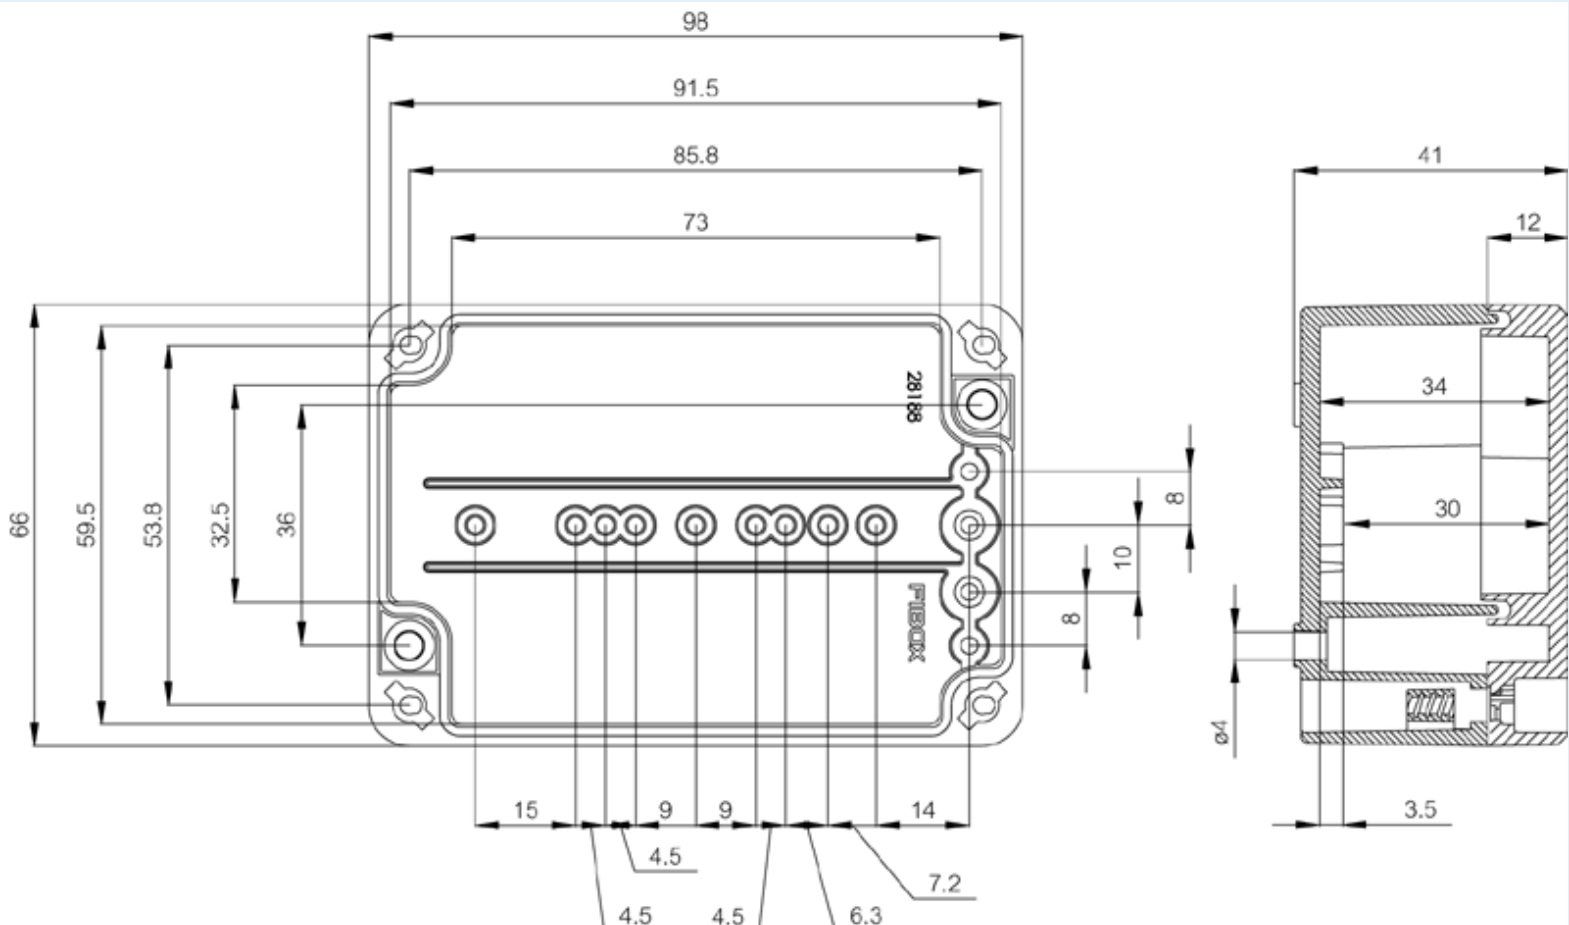

Dimensions :	Height	Width	Depth
mm :	66	98	41
inch :	2.6	3.86	1.61

Materials :	
Material :	Polycarbonate
Base colour :	RAL 7035 -light grey
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :	
Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	-40 ... 80
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

Accessories :	
TF 28037	Wall fastening lug (4 pcs), for enclosures:
TH A	Grey plastic hinges (2 pcs)

Ratings :	
Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK07; IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 508
Flammability Rating :	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C :	960 °C

Certificates :
SGSFimko_EURONORD