

# PC 162515



Sample image

**Order symbol :** PC 162515

**Product nr :** 7032740

UL Code : 7042740

UL Name : UL PC 162515

**Description :** Enclosure, PC


**Remarks :** Grey cover

**EAN :** 6418074058485

**El. number :**

- Finland : 3435376
- Denmark : 8212002982
- Sweden : 2536132

**Including :** Base with screws for mounting plate/DIN-rail. cover with PUR gasket and stainless steel cover screws.

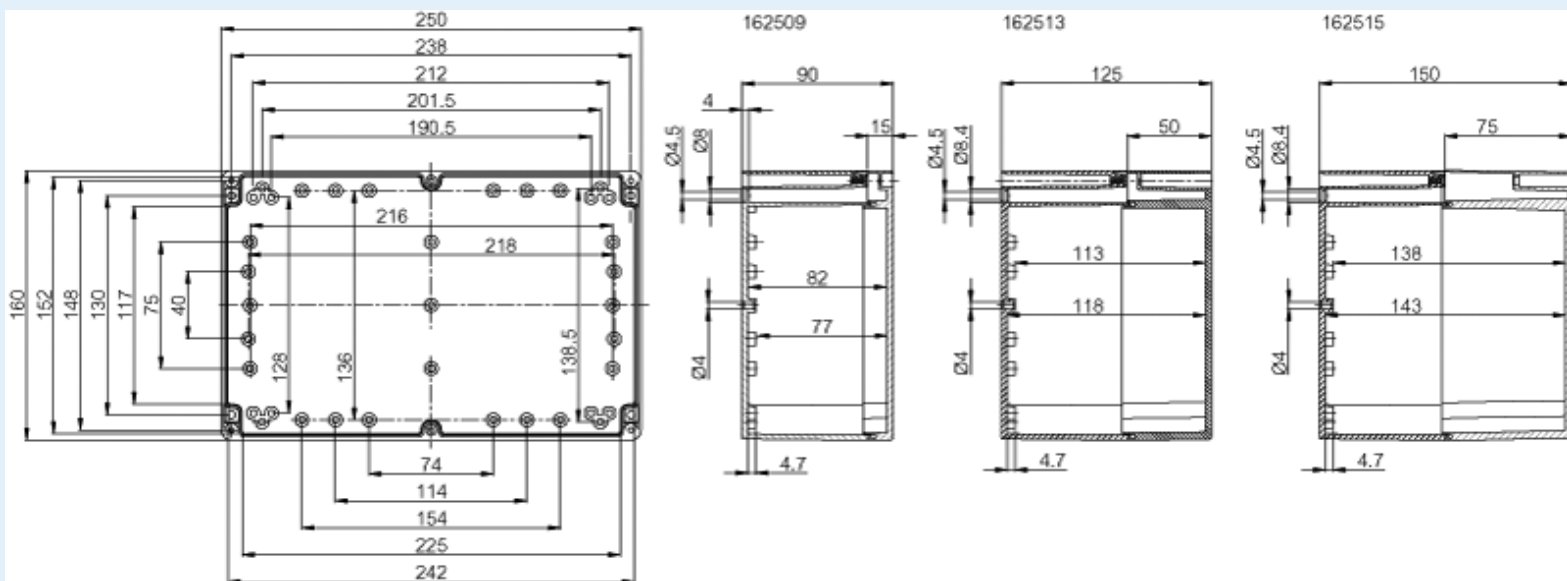

**Dimensions :**

|        | Height | Width | Depth |
|--------|--------|-------|-------|
| mm :   | 160    | 250   | 150   |
| inch : | 6.3    | 9.84  | 5.91  |

**Materials :**

**Accessories :**

|          |                                                         |
|----------|---------------------------------------------------------|
| TM 1625  | Mounting plate, for enclosures:<br>(151 x 214 x 1)      |
| TRH 24   | DIN-35 Mounting rail, for enclosures:<br>(226 x 35 x 1) |
| TF 28037 | Wall fastening lug (4 pcs), for enclosures:             |
| TRH 1216 | DIN-35 Mounting rail, for enclosures:                   |

|                   |                      |
|-------------------|----------------------|
| Material :        | Polycarbonate        |
| Base colour :     | RAL 7035 -light grey |
| Cover colour :    | RAL 7035 -light grey |
| Gasket material : | Polyurethane         |

|          |                                                         |
|----------|---------------------------------------------------------|
|          | (146 x 35 x 1)                                          |
| TRM 0816 | DIN-15 Mounting rail, for enclosures:<br>(146 x 15 x 1) |
| TH A     | Grey plastic hinges (2 pcs)                             |

**Temperatures :**

|                               |             |
|-------------------------------|-------------|
| Temperature °C (short term) : | -40 ... 120 |
| Temperature °C (continuous) : | -40 ... 80  |
| Temperature °F (short term) : | -40 ... 250 |
| Temperature °F (continuous) : | -40 ... 175 |

**Ratings :**

|                                         |                   |
|-----------------------------------------|-------------------|
| Ingress protection (EN 60529):          | IP66; IP67;       |
| Impact Resistance (EN 62262):           | IK07; IK08;       |
| electrical_insulation :                 | Totally insulated |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes               |
| UV resistance :                         | UL 508            |
| Flammability Rating :                   | UL 746C 5"        |
| Glow Wire Test (IEC 695-2-1) °C :       | 960 °C            |

**Certificates :**

SGSFimko\_EURONORD