


**FIBOX**  
Enclosing innovations



**Remarks :** Smoked transparent cover

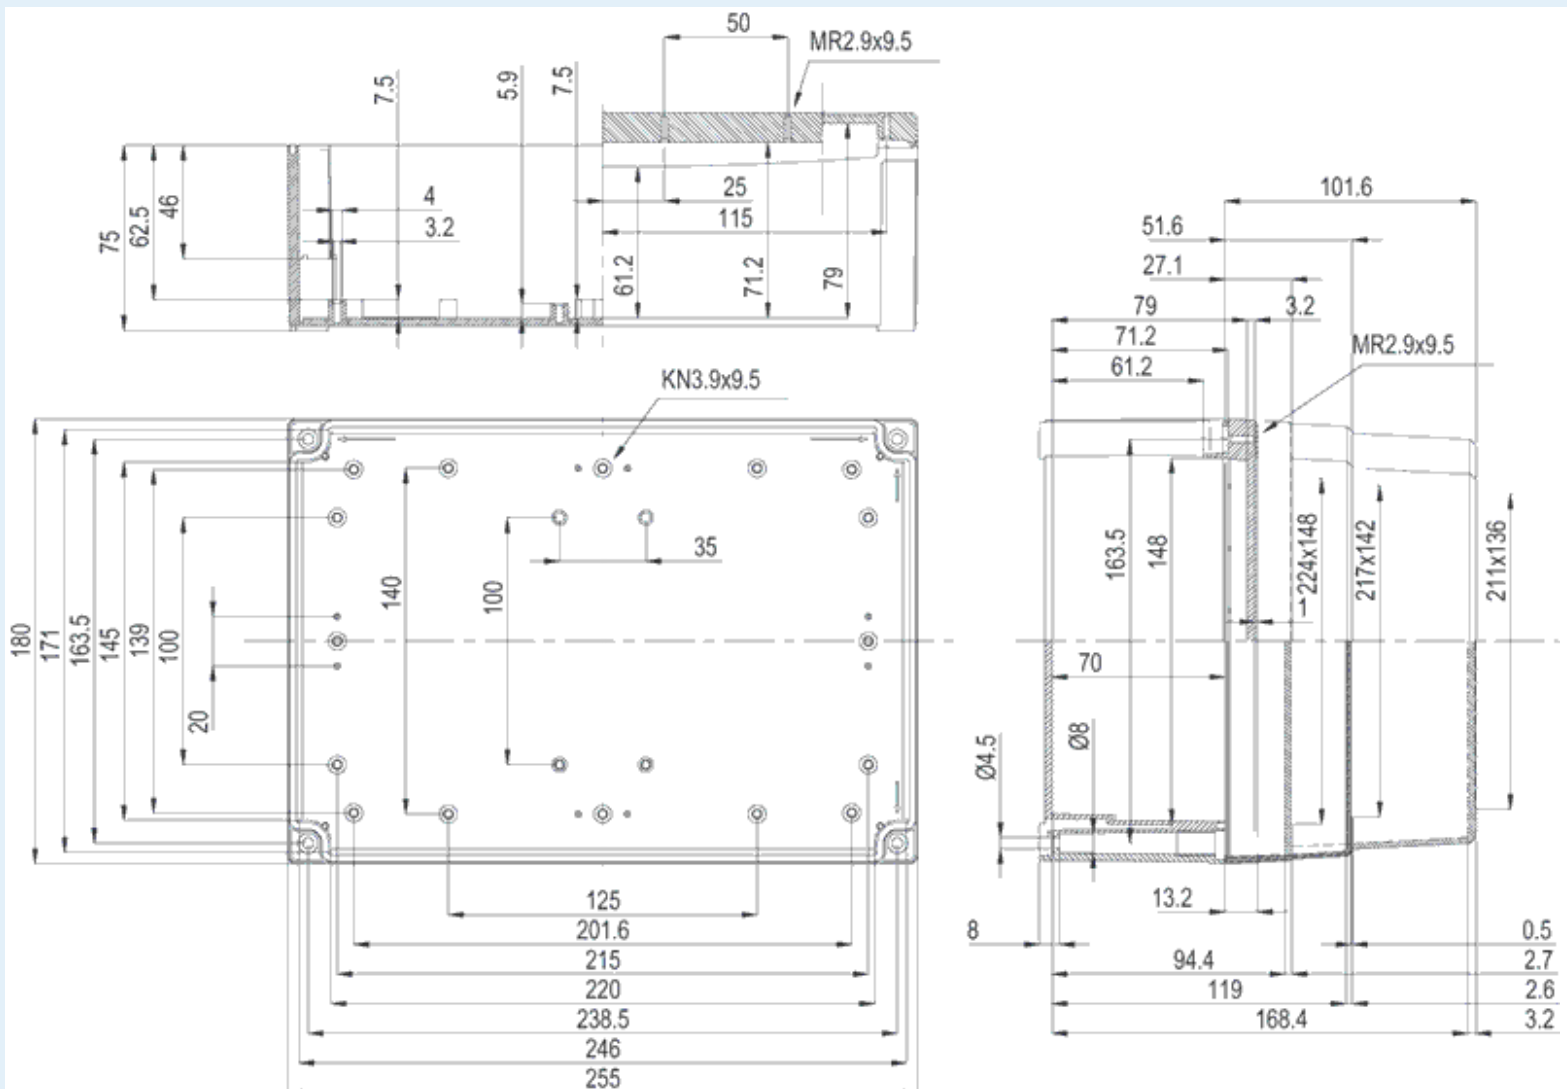

| Dimensions : | Height | Width | Depth |
|--------------|--------|-------|-------|
| mm :         | 255    | 180   | 175   |
| inch :       | 10.04  | 7.09  | 6.89  |

|             |
|-------------|
| Materials : |
|-------------|

|                               |             |
|-------------------------------|-------------|
| Temperatures :                |             |
| Temperature °C (short term) : | -40 ... 120 |
| Temperature °F (short term) : | -40 ... 250 |
| Temperature °F (continuous) : | -40 ... 175 |

|                                         |                             |
|-----------------------------------------|-----------------------------|
| Ratings :                               |                             |
| Ingress protection (EN 60529):          | IP66; IP67;                 |
| Impact Resistance (EN 62262):           | IK08;                       |
| electrical_insulation :                 | Totally insulated           |
| Halogen free (DIN/VDE 0472, Part 815) : | Yes                         |
| UV resistance :                         | UL 508                      |
| Flammability Rating :                   | UL 746C 5"                  |
| Glow Wire Test (IEC 695-2-1) °C :       | 960 °C                      |
| NEMA Class                              | Type 1, 4, 4X, 6, 12 and 13 |

|                             |
|-----------------------------|
| Certificates :              |
| MNX_CertificateofCompliance |