


OA172AN Series



AC Fan - 115V, 230V
172 x 51mm (6.7"x 2.0")

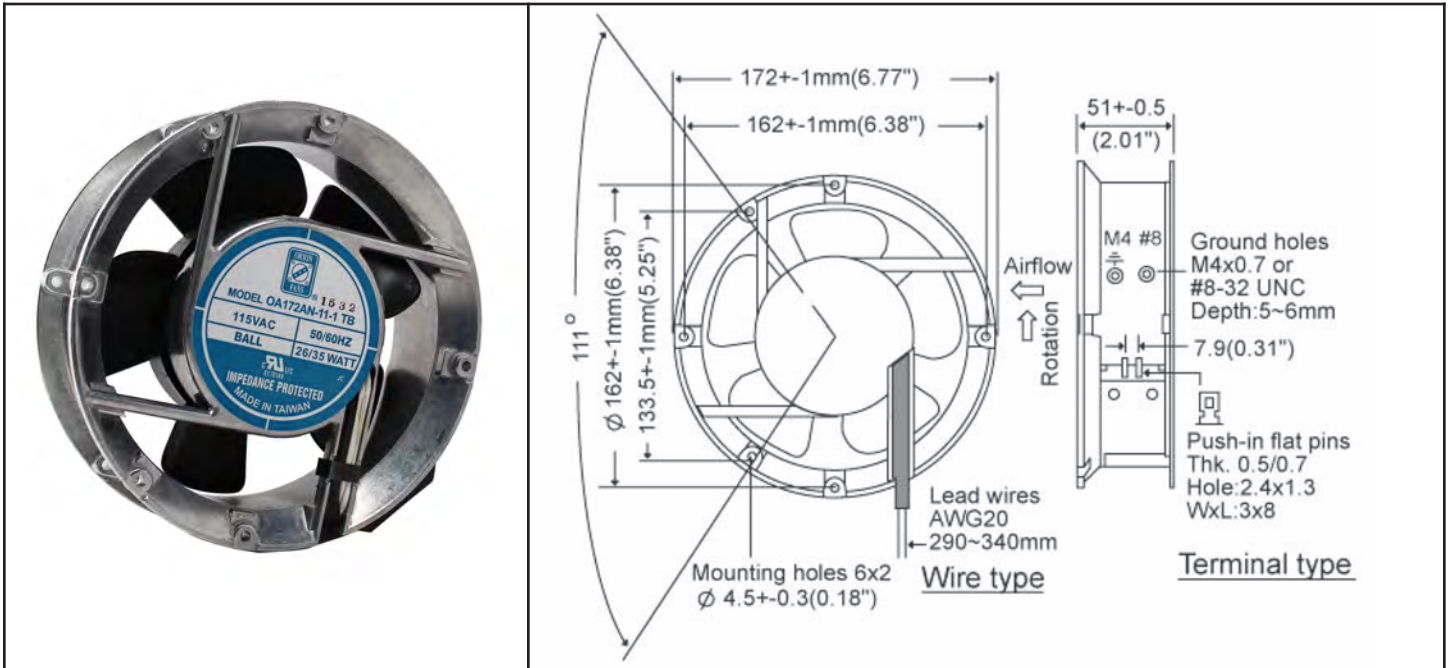

Frame	Diecast Aluminum, Natural Finish	Operating Temperature Ball Bearing -40C ~ +70C Storage Temp -40C ~ +80C Life Expectancy Ball Bearing 60,000 hours (L10 at 40C) Weight: ~ 2.7 lbs. m0
Impeller	PBT, UL94V-0 plastic	
Connection	2x Lead Wires or Terminals	
Motor	Capacitor drive, impedance protected	
Bearing System	Dual ball	
Insulation Resistance	>100M ohm between lead-wire and frame (500VDC)	
Dielectric Strength	1 min at 1500 VAC, 50/60Hz	

Airflow (CFM)	Static Pressure (\"H2O) -1	Static Pressure (\"H2O) -2	Static Pressure (\"H2O) -3
0	0.70	0.48	0.42
50	0.60	0.40	0.22
100	0.38	0.25	0.15
150	0.32	0.18	0.08
200	0.18	0.00	0.00
250	0.00	0.00	0.00

Model Number	Speed (RPM)	Airflow (CFM)	Noise (dB)	Volts AC	Voltage Range	Watts	Max. Static Pressure (\"H ₂ O)
OA172AN-11-1 *	3200	235	52	115	80~130	35	0.70
OA172AN-11-2 *	2400	170	42	115	80~130	20	0.49
OA172AN-11-3 *	1800	135	33	115	80~130	16	0.43
OA172AN-22-1 *	3200	235	52	230	160~260	35	0.70
OA172AN-22-2 *	2400	170	42	230	160~260	20	0.49
OA172AN-22-3 *	1800	135	33	230	160~260	16	0.43

* Indicate "TB" for Terminal type or "WB" for Wire Leads