

**RIGOL**



## DG2000 Series

### Function/Arbitrary Waveform Generator

- Unique SiFi II (Signal Fidelity II) technology: generate the arbitrary waveforms point by point; recover the signal without distortion; sample rate accurate and adjustable; jitter of all the output waveforms (including Sine, Pulse, etc.) as low as 200 ps
- 16 Mpts memory depth per channel for arbitrary waveforms
- Standard dual-channel with the same performance, equivalent to two independent signal sources
- High frequency stability:  $\pm 1$  ppm; low phase noise: -105 dBc/Hz
- Built-in high-order harmonic generator (at most 8-order harmonics)
- Built-in 7 digits/s, 240 MHz bandwidth full featured frequency counter
- Up to 160 built-in arbitrary waveforms, covering the common signals in engineering application, medical electronics, auto electronics, math processing, and other various fields
- Sample rate up to 250 MSa/s, vertical resolution 16 bits
- Arbitrary waveform sequence editing function available; arbitrary waveforms also can be generated through the PC software
- Various analog and digital modulation functions: AM, FM, PM, ASK, FSK, PSK, and PWM.
- Standard waveform combine function, capable of outputting specified waveforms combined with the basic waveforms
- Standard channel tracking function, when enabled, all the parameters of both channels are updated based on users' configurations
- Standard interface: USB Host&Device and LAN (LXI Core 2011 Device); USB-GPIB function supported
- 4.3" TFT color touch screen
- RS232, PRBS, and Dual-tone outputs supported

## ► Design Features


### Unique SiFi II Technology

Generate the arbitrary waveforms points by points without distorting the signals. In comparison with the last generation of the SiFi technology, SiFi II has added multiple filters, supporting the dynamic adjustment of the edge time.



### Touch-enabled UI Design

Provide brand new UI operation experience, supporting the tap and drag operation gestures. You can also use the onscreen keypad to complete the parameter settings.

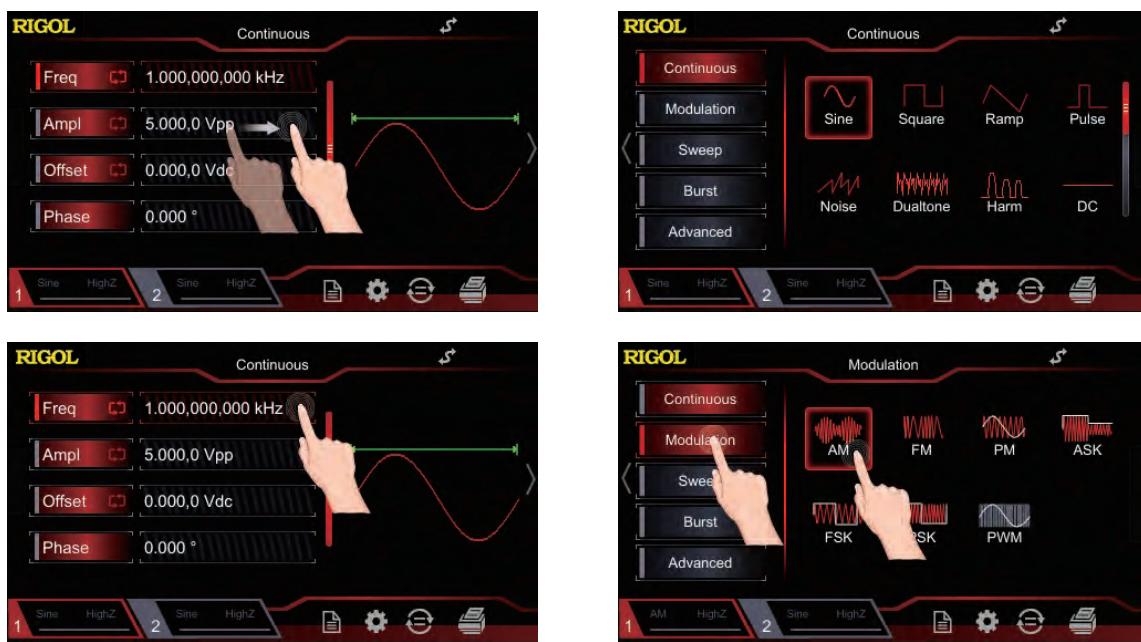


### Advanced Function Output

Support PRBS and RS232 pattern output and local Sequence editing.



### 100MHz Bandwidth White Gaussian Noise

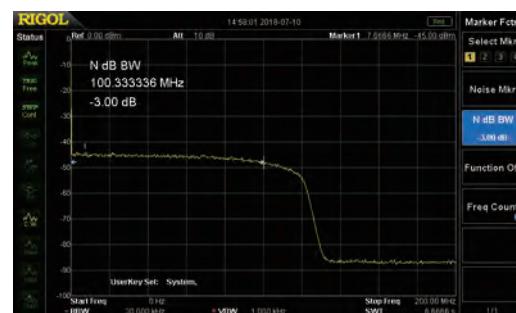

# DG2000 Series


## Function/Arbitrary Waveform Generator



Dimensions: WxHxD = 261.5 mm x 112 mm x 318.4 mm Weight: 3.2 kg (Package Excluded)

## ► Function Interface

Dual-channel with the same performance

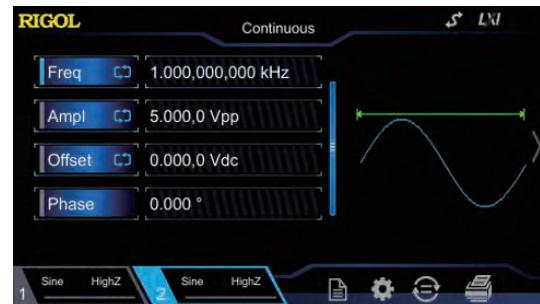

**Sifi II**


Arbitrary waveform function with the unique SiFi II technology




160 built-in arbitrary waveforms



Burst function

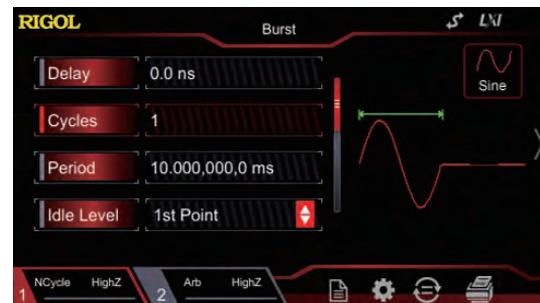


Various analog and digital modulation functions

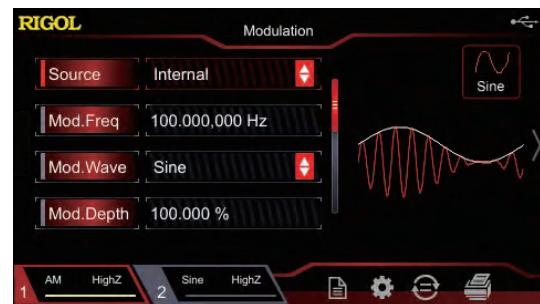

## Sweep function



## Standard harmonic generator function

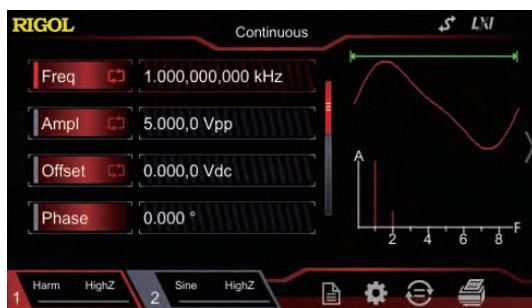

## Dual-tone function



## PRBS function



## RS232 function



## Sequence function



## Waveform combine function



Standard 7 digits/s, 240 MHz bandwidth frequency counter



## Channel and system setting



## File management function



## ► Specifications

Unless otherwise specified, all the specifications can be guaranteed when the following two conditions are met.

- The signal generator is within the calibration period.
- The signal generator has been running ceaselessly for over 30 minutes under the specified operating temperature ( $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$ ).

All the specifications are guaranteed except the parameters marked with "Typical".

### DG2000 series specifications

Model	DG2052	DG2072	DG2102			
Channel	2	2	2			
Max. Frequency	50 MHz	70 MHz	100 MHz			
Sample Rate	250 MSa/s					
Waveform						
Basic Waveforms	Sine, Square, Ramp, Pulse, Noise, DC, Dual-tone					
Advanced Waveforms	PRBS, RS232, Sequence					
Built-in Arbitrary Waveforms	160 types of waveforms, including Sinc, Exponential Rise, Exponential Fall, ECG, Gauss, HaverSine, Lorentz, etc.					
Frequency Characteristics						
Sine	1 $\mu\text{Hz}$ to 50 MHz	1 $\mu\text{Hz}$ to 70 MHz	1 $\mu\text{Hz}$ to 100 MHz			
Square	1 $\mu\text{Hz}$ to 15 MHz	1 $\mu\text{Hz}$ to 20 MHz	1 $\mu\text{Hz}$ to 25 MHz			
Ramp	1 $\mu\text{Hz}$ to 1.5 MHz	1 $\mu\text{Hz}$ to 1.5 MHz	1 $\mu\text{Hz}$ to 2 MHz			
Pulse	1 $\mu\text{Hz}$ to 15 MHz	1 $\mu\text{Hz}$ to 20 MHz	1 $\mu\text{Hz}$ to 25 MHz			
Harmonic	1 $\mu\text{Hz}$ to 20 MHz	1 $\mu\text{Hz}$ to 20 MHz	1 $\mu\text{Hz}$ to 25 MHz			
PRBS	2 kbps to 40 Mbps	2 kbps to 50 Mbps	2 kbps to 60 Mbps			
Dual-tone	1 $\mu\text{Hz}$ to 20 MHz	1 $\mu\text{Hz}$ to 20 MHz	1 $\mu\text{Hz}$ to 20 MHz			
RS232	baud rate range: 9600, 14400, 19200, 38400, 57600, 115200, 128000, 230400					
Sequence	2 k to 60 MSa/s					
Noise (-3 dB)	100 MHz bandwidth					
Arbitrary Waveform	1 $\mu\text{Hz}$ to 15 MHz	1 $\mu\text{Hz}$ to 20 MHz	1 $\mu\text{Hz}$ to 20 MHz			
Resolution	1 $\mu\text{Hz}$					
Accuracy	$\pm(1 \text{ ppm of the setting value} + 10 \text{ pHz})$ , 18°C to 28°C					
Sine Wave Spectrum Purity						
Harmonic Distortion	Typical <sup>[1]</sup> DC to 10 MHz (included): <-55 dBc 10 MHz to 20 MHz (included): <-50 dBc 20 MHz to 40 MHz (included): <-40 dBc >40 MHz: <-35 dBc					
Total Harmonic Distortion <sup>[1]</sup>	<0.075% (10 Hz to 20 kHz)					
Spurious (non-harmonic)	Typical <sup>[1]</sup> ≤10 MHz: <-60 dBc >10 MHz: <-60 dBc + 6 dB/octave					
Phase Noise	Typical (0 dBm, 10 kHz offset) 10 MHz: <-105 dBc/Hz					
Signal Characteristics						
Square						
Rise/Fall Time	Typical (1 Vpp, 1 kHz) ≤9 ns					
Overshoot	Typical (100 kHz, 1 Vpp) ≤5%					
Duty	0.01% to 99.99% (limited by the current frequency setting)					
Non-symmetry	1% of the period + 4 ns					
Jitter (rms)	Typical (1 Vpp) ≤5 MHz: 2 ppm of the period + 200 ps >5 MHz: 200 ps					
Ramp						
Linearity	≤1% of peak output (typical, 1 kHz, 1 VPP, 100% symmetry)					
Symmetry	0% to 100%					

Pulse	
Pulse	16 ns to 1000 ks (limited by the current frequency setting)
Duty	0.001% to 99.999% (limited by the current frequency setting)
Rising/Falling Edge	≥8 ns (limited by the current frequency setting and pulse width setting)
Overshoot	Typical (1 Vpp, 1 kHz) ≤5%
Jitter (rms)	Typical (1 Vpp) ≤5 MHz: 2 ppm of the period + 200 ps >5 MHz: 200 ps
Arbitrary Waveform Sequence	
Waveform Length	16 Mpts
Vertical Resolution	16 bits
Sample Rate	Interpolation filter: 10 Sa/s to 60 MSa/s Step filter: 2k Sa/s to 50 MSa/s Smooth filter: 2k Sa/s to 50 MSa/s
Min Rise/Fall Time	Interpolation filter: ≥8 ns Step filter: 3.0/sample rate Smooth filter: 1.0/sample rate
Jitter (rms)	Typical (1 Vpp) Interpolation filter: 200 ps Step filter: <5 ps Smooth filter: <5 ps
Overshoot	Typical (1 Vpp) ≤5%
Harmonic Output	
Harmonic Order	≤8
Harmonic Type	Even Harmonic, Odd Harmonic, Order Harmonic, User
Harmonic Amplitude	The amplitude of each order of the harmonic can be set.
Harmonic Phase	The phase of each order of harmonic can be set.
Output Characteristics	
Amplitude (into 50 Ω)	
Range	≤10 MHz: 1.0 mVpp to 10 Vpp ≤30 MHz: 1.0 mVpp to 5.0 Vpp ≤60 MHz: 1.0 mVpp to 2.5 Vpp >60 MHz: 1.0 mVpp to 1 Vpp
Accuracy	Typical (1 kHz sine, 0 V offset, >10 mVpp, auto) ±(1% of the setting value) ± 5 mV
Flatness	Typical (Sine, 1 Vpp) ≤5 MHz: ±0.1 dB ≤15 MHz: ±0.2 dB ≤25 MHz: ±0.3 dB ≤40 MHz: ±0.5 dB >40 MHz: ±1 dB
Unit	Vpp, Vrms, dBm
Resolution	0.1 mVpp or 4 digits
Offset (into 50 Ω)	
Range(Peak ac+dc)	±5 Vpk ac+dc
Accuracy	±(1% of the setting value + 5 mV + 1% of the amplitude)
Waveform Output	
Output Impedance	50 Ω (typical)
Protection	Short-circuit protection, automatically disable the waveform output when overload occurs
Modulation Characteristics	
Modulation Type	AM, FM, PM, ASK, FSK, PSK, PWM
AM	
Carrier Waveform	Sine, Square, Ramp, Arb
Source	Internal/External
Modulating Waveform	Sine, Square, Ramp, Noise, Arb
Modulation Depth	0% to 120%
Modulation Frequency	2 mHz to 1 MHz
FM	

Carrier Waveform	Sine, Square, Ramp, Arb		
Source	Internal/External		
Modulating Waveform	Sine, Square, Ramp, Noise, Arb		
Modulation Frequency	2 mHz to 1 MHz		
PM			
Carrier Waveform	Sine, Square, Ramp, Arb		
Source	Internal/External		
Modulating Waveform	Sine, Square, Ramp, Noise, Arb		
Phase Deviation	0° to 360°		
Modulation Frequency	2 mHz to 1 MHz		
ASK			
Carrier Waveform	Sine, Square, Ramp, Arb		
Source	Internal/External		
Modulating Waveform	Square with 50% duty cycle		
Key Frequency	2 mHz to 1 MHz		
FSK			
Carrier Waveform	Sine, Square, Ramp, Arb		
Source	Internal/External		
Modulating Waveform	Square with 50% duty cycle		
Key Frequency	2 mHz to 1 MHz		
PSK			
Carrier Waveform	Sine, Square, Ramp, Arb		
Source	Internal/External		
Modulating Waveform	Square with 50% duty cycle		
Key Frequency	2 mHz to 1 MHz		
PWM			
Carrier Waveform	Pulse		
Source	Internal/External		
Modulating Waveform	Sine, Square, Ramp, Noise, Arb		
Width Deviation	0% to 100% of the pulse width		
Modulation Frequency	2 mHz to 1 MHz		
External Modulation Input			
Input Range	AM, PM, FM: 75 mVRMS to $\pm 5$ (Vac+dc) ASK, PSK, FSK: standard 5 V TTL		
Input Bandwidth	50 kHz		
Input Impedance	10 k $\Omega$		
Burst Characteristics			
Carrier Waveform	Sine, Square, Ramp, Pulse, Noise, Arb, PRBS, RS232, Sequence (except DC, dual-tone, and Harmonic)		
Carrier Frequency	2 mHz to 50 MHz	2 mHz to 70 MHz	2 mHz to 100 MHz
Burst Count	1 to 1,000,000 or Infinite		
Internal Period	1 $\mu$ s to 500 s		
Gated Source	External Trigger		
Source	Internal, External, Manual		
Trigger Delay	0 ns to 100 s		
Sweep Characteristics			
Carrier Waveform	Sine, Square, Ramp, Arb		
Type	Linear, Log, and Step		
Orientation	Up/Down		
Start/Stop Frequency	Same as the upper/lower limit of the corresponding carrier frequency		
Sweep Time	1 ms to 500 s		
Hold/Return Time	0 ms to 500 s		
Source	Internal, External, Manual		
Marker	Falling edge of the sync signal (programmable)		
Frequency Counter			
Measurement Function	Frequency, Period, Positive/Negative Pulse Width, Duty Cycle		
Frequency Resolution	7 digits/s (Gate Time = 1 s)		

Frequency Range	1 µHz to 240 MHz			
Period Measurement	Measurement Range	4 ns to 1,000 ks		
Voltage Range and Sensitivity (non-modulating signal)				
DC Coupling	DC Offset Range	±1.5 Vdc		
	1 µHz to 100 MHz	50 mVRMS to ±2.5 (Vac+dc)		
	100 MHz to 240 MHz	100 mVRMS to ±2.5 (Vac+dc)		
AC Coupling	1 µHz to 100 MHz	50 mVRMS to ±2.5 Vpp		
	100 MHz to 240 MHz	100 mVRMS to ±2.5 Vpp		
Pulse Width and Duty Cycle Measurement				
Frequency and Amplitude Ranges	1 µHz to 25 MHz	50 mVRMS to ±2.5 (Vac+dc)	DC Coupling	
Pulse Width	Min. Pulse Width	≥20 ns		
	Pulse Width Resolution	5 ns		
Duty	Measurement Range (display)	0% to 100%		
Input Characteristics				
Input Signal Range	Disruptive Discharge Voltage	±7 (Vac+dc)	Input Impedance = 1 MΩ	
Input Adjustment	Coupling Mode	AC	DC	
	High Frequency Rejection	On: Input Bandwidth = 150 kHz; Off: Input Bandwidth = 240 MHz		
Input Trigger	Trigger Level Range	-2.5 V to +2.5 V		
	Trigger Sensitivity Range	High, Low		
GateTime	1 ms	1.048 ms		
	10 ms	8.389 ms		
	100 ms	134.218 ms		
	1 s	1.074 s		
	10 s	8.590 s		
	>10 s	>8.590 s		
Trigger Characteristics				
Trig Input				
Level	TTL-compatible			
Slope	Rising or falling (selectable)			
Pulse Width	>100 ns			
Latency	Sweep: <100 ns (typical) Burst: <350 ns (typical)			
Trigger Output				
Level	TTL-compatible			
Pulse Width	>60 ns (typical)			
Max. Frequency	1 MHz			
Two-channel Characteristics - Phase Offset				
Range	0° to 360°			
Waveform Phase Resolution	0.03°			
Reference Clock				
External Reference Input				
Lock Range	10 MHz ± 50 Hz			
Level	250 mVpp to 5 Vpp			
Lock Time	<2 s			
Input Impedance(Typical)	1 kΩ, AC coupling			
Internal Reference Output				
Frequency	10 MHz ± 50 Hz			
Level	3.3 Vpp			
Output Impedance(Typical)	50 Ω, AC coupling			
Synchronous Output				
Level	TTL-compatible			
Impedance	50 Ω, nominal value			

### Overvoltage Protection

Occurred when:

The instrument amplitude setting is greater than 3.2 Vpp or the output AC+DC is greater than  $|1.6V_{DC}|$  and the input voltage is greater than  $\pm 12 \times (1 \pm 5\%)V$  ( $<10$  kHz). Disruptive discharge voltage:  $\pm 18(V_{AC} + dc)$ .

The instrument amplitude setting is smaller than or equal to 3.2 Vpp or the output AC+DC is smaller than  $|1.6V_{DC}|$  and the input voltage is greater than  $\pm 2.6 \times (1 \pm 5\%)V$  ( $<10$  kHz). Disruptive discharge voltage:  $\pm 5(V_{AC} + dc)$ .

### Overcurrent Protection

Occurred when: the current is greater than  $\pm 240$  mA.

### Programming Time

Configuration Changes	USB
Function Change	10 ms
Amplitude Change	5 ms
Frequency Change	5 ms

### General Specifications

#### Power Supply

Power Voltage	100 V to 127 V (45 Hz to 440 Hz) 100 V to 240 V (45 Hz to 65 Hz)
Power Consumption	Lower than 30 W

#### Display

Type	4.3-inch TFT LCD touch screen
Resolution	480 horizontal x RGB x 272 vertical resolution
Color	16 M

#### Environment

Temperature Range	Operating: 0°C to 45°C Non-operating: -40°C to 60°C
Cooling Method	Natural air cooling
Humidity Range	Below 30°C: $\le 95\%$ RH 30°C to 40°C: $\le 75\%$ RH 40°C to 50°C: $\le 45\%$ RH
Altitude	Operating: below 3,000 meters Non-operating: below 15,000 meters

#### Mechanical Characteristics

Dimensions (WxHxD)	261.5 mm x 112 mm x 318.4 mm
Weight	Package excluded: 3.2 kg Package included: 4.5 kg
Interface	USB Host, USB Device, and USB-GPIB
IP Protection	IP2X
Calibration Interval	1 year (recommended)

#### Certification Information

EMC	Compliant with EN61326-1:2006	
	IEC 61000-3-2:2000	$\pm 4.0$ kV (Contact Discharge) $\pm 4.0$ kV (Air Discharge)
	IEC 61000-4-3:2002	3 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)
	IEC 61000-4-4:2004	1kV power line
	IEC 61000-4-5:2001	0.5 kV (phase-to-neutral voltage); 0.5 kV (phase-to-earth voltage); 1 kV (neutral-to-earth voltage)
	IEC 61000-4-6:2003	3 V, 0.15 MHz to 80 MHz
	IEC 61000-4-11:2004	Voltage dip: 0% UT during half cycle 0% UT during 1 cycle 70% UT during 25 cycles Short interruption: 0% UT during 1 cycle

Electrical Safety	complies with USA: UL 61010-1:2012, Canada: CAN/CSA-C22.2 No. 61010-1-2012 EN 61010-1:2010,
-------------------	---

Note[1]: 0 dBm output, DC offset 0, impedance 50 Ω.

## ► Options and Accessories

	Description	Order No
Model	DG2052 (50 MHz, Dual-channel)	DG2052
	DG2072 (70 MHz, Dual-channel)	DG2072
	DG2102 (100 MHz, Dual-channel)	DG2102
Standard Accessories	1 Power Cord conforming to the standard of the destination country	-
	1 USB Cable	CB-USBA-USBB-FF-150
	1 BNC Cable	CB-BNC-BNC-MM-100
	1 Quick Guide	-
Optional Accessories	1 Product Warranty Card	-
	40 dB Attenuator	RA5040K
	USB-GPIB Interface Converter	USB-GPIB-L

### HEADQUARTER

**RIGOL** TECHNOLOGIES, INC.  
No.8 Keling Road, New District, Suzhou,  
JiangSu, P.R.China  
Tel: +86-400620002  
Email: info@rigol.com

### EUROPE

**RIGOL** TECHNOLOGIES EU GmbH  
Lindbergh str. 4  
82178 Puchheim  
Germany  
Tel: 0049-89/89418950  
Email: info-europe@rigol.com

### NORTH AMERICA

**RIGOL** TECHNOLOGIES, USA INC.  
8140 SW Nimbus Ave.  
Beaverton, OR 97008  
Tel: 877-4-**RIGOL**-1  
Fax: 877-4-**RIGOL**-1  
Email: info@rigol.com

### JAPAN

**RIGOL** TECHNOLOGIES JAPAN, LLC  
MJ Bldg. 3F, 1-7-4 Minato, Chuou-ku,  
Tokyo, Japan 104-0043  
Tel: +81-3-6262-8932  
Fax: +81-3-6262-8933  
Email: info-japan@rigol.com

**RIGOL**® is the registered trademark of **RIGOL** Technologies, Inc. Product information in this document subject to update without notice. For the latest information about **RIGOL**'s products, applications and services, please contact local **RIGOL** office or access **RIGOL** Channel Partners website: [www.rigol.com](http://www.rigol.com)