

RIGOL




RSA3000E Series

Real-time Spectrum Analyzer

- Ultra-Real technology
- Frequency: up to 3 GHz
- Displayed average noise level (DANL): <-161 dBm (typical)
- Phase noise: <-102 dBc/Hz (typical)
- Level measurement uncertainty: <1.0 dB
- 3 GHz tracking generator
- Min. RBW 1 Hz
- Up to 10 MHz real-time analysis bandwidth
- Multiple measurement modes
- Various advanced measurement functions
- EMI measurement application (option)
- Multiple trigger modes and trigger masks
- Density, spectrogram, and other display modes
- PC software options
- 10.1" capacitive multi-touch screen; supporting touch gestures
- USB, LAN, HDMI and other communication and display interfaces

RSA3000E Series Real-time Spectrum Analyzer

Built-in Linux operating system reliable and stable interface

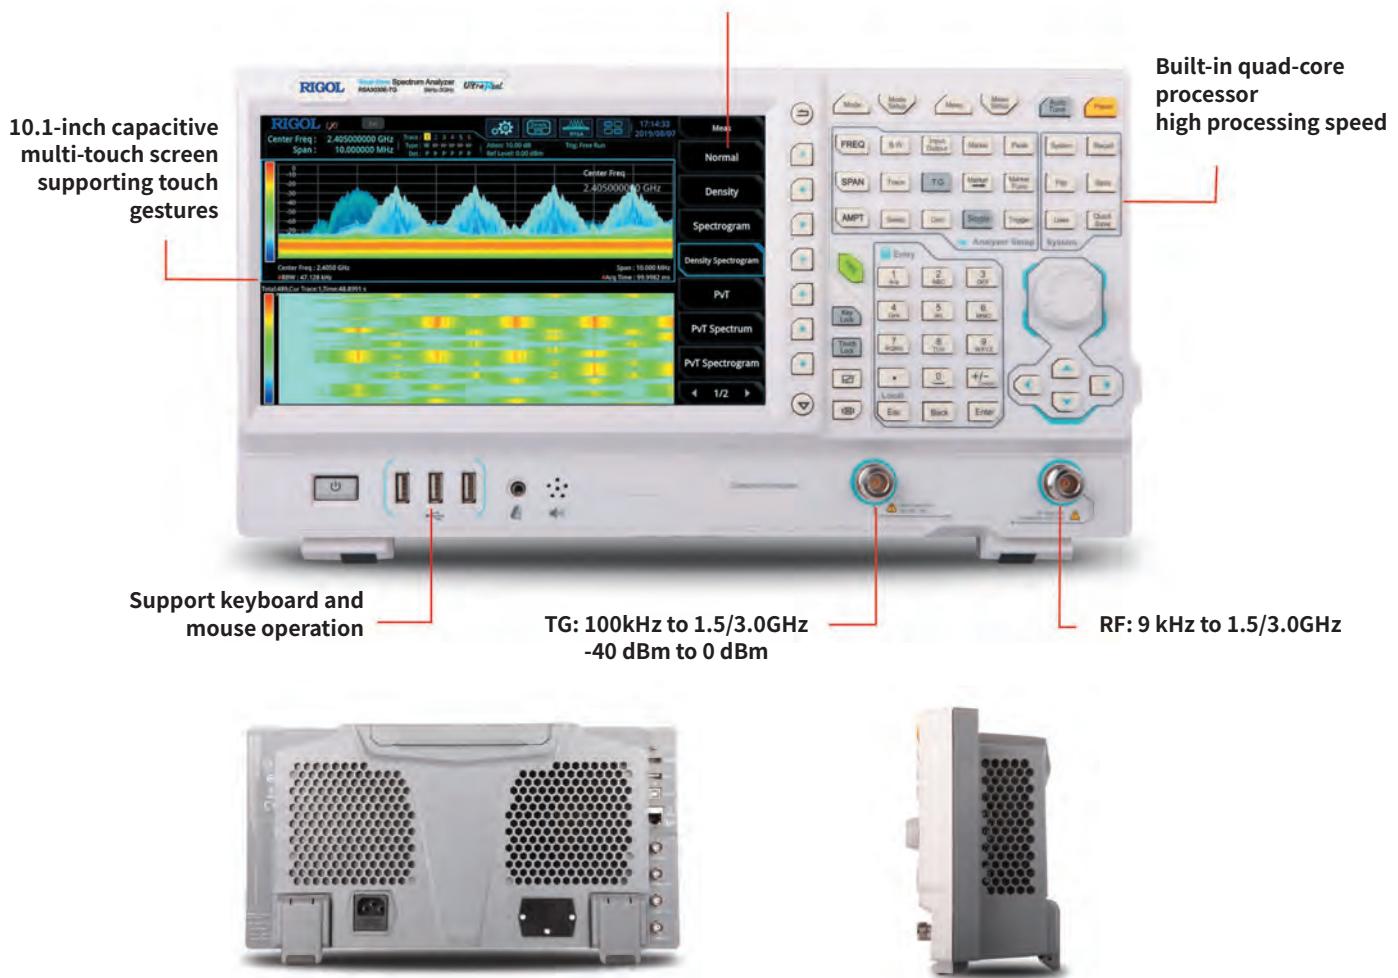

Product Dimensions: Width x Height x Depth = 410 mm x 224 mm x 135 mm

UltraReal

Based on the Ultra-Real technology, the high-speed real-time measurement mode allows you to acquire the signals in the analysis bandwidth seamlessly and make data analysis. It also provides various display modes, such as Spectrogram, Density, and PVT. Besides, FMT function is also available.

The Ultra-Real technology has the following features:

- **Seamless analysis**
 - Seamless I/Q data acquisition in the analysis bandwidth
 - Seamless spectrum analysis
- **FMT**
 - Frequency mask trigger (FMT) to trigger the measurement by sporadic or transient events in the spectrum
- **Composite displays**
 - Spectrogram for gap-free display of the spectrum
 - Density for you to visualize how frequently signals occur

► Specifications

Specifications are valid under the following conditions: the instrument is within the calibration period, is stored for at least two hours at 0°C to 50°C temperature, and is warmed up for 40 minutes. Unless otherwise noted, the specifications in this manual include the measurement uncertainty.

Typical: characteristic performance, which 80 percent of the measurement results will meet at room temperature (approximately 25°C). This data is not warranted and does not include the measurement uncertainty.

Nominal: the expected mean or average performance or a designed attribute (such as the 50 Ω connector). This data is not warranted and is measured at room temperature (approximately 25°C).

Measured: an attribute measured during the design phase which can be compared to the expected performance, such as the amplitude drift variation with time. This data is not warranted and is measured at room temperature (approximately 25°C).

NOTE: All charts in this manual are the measurement results of multiple instruments at room temperature unless otherwise noted. The specifications (except the tracking generator specifications) listed in this manual are those when the tracking generator is off.

Measurement Mode

Measurement Mode
General-Purpose Spectrum Analyzer (GPSA)
Real-time Spectrum Analyzer (RTSA)
EMI Measurement Application (EMI) Option RSA3000E-EMI
ASK/FSK Demodulation Software Option RSA3000E-ASK/FSK


All Measurement Modes

Frequency Range
Model RSA3015E/RSA3015E-TG 9 kHz to 1.5 GHz
Model RSA3030E/RSA3030E-TG 9 kHz to 3 GHz
Internal Reference Frequency
Reference Frequency 10 MHz
Accuracy $\pm[(\text{time since last calibration} \times \text{aging rate}) + \text{temperature stability} + \text{calibration accuracy}]$
Initial Calibration Accuracy
Standard <1 ppm
Option OCXO-C08 <0.1 ppm
Temperature Stability 0°C to 50°C, with the reference 25°C
Standard <0.5 ppm
Option OCXO-C08 <0.005 ppm
Aging Rate
Standard <1 ppm/year
Option OCXO-C08 <0.03 ppm/year

GPSA Mode

Frequency

Frequency Readout Accuracy		
Marker Frequency Resolution	span/(number of sweep points - 1)	
Marker Frequency Uncertainty	$\pm(\text{marker frequency readout} \times \text{reference frequency accuracy} + 1\% \times \text{span} + 10\% \times \text{resolution bandwidth} + \text{marker frequency resolution})$	
Frequency Counter		
Resolution	1 Hz	
Uncertainty	$\pm(\text{marker frequency readout} \times \text{reference frequency accuracy} + \text{counter resolution})$	
Frequency Span		
Range	0 Hz, 10 Hz to maximum frequency	
Resolution	2 Hz	
Uncertainty	$\pm\text{span}/(\text{number of sweep points} - 1)$	
SSB Phase Noise		
	20°C to 30°C, $f_c = 500$ MHz	
Carrier Offset	1 kHz	<-90 dBc/Hz (typical)
	10 kHz	<-100 dBc/Hz, <-102 dBc/Hz (typical)
	100 kHz	<-100 dBc/Hz, <-102 dBc/Hz (typical)
	1 MHz	<-110 dBc/Hz, <-112 dBc/Hz (typical)


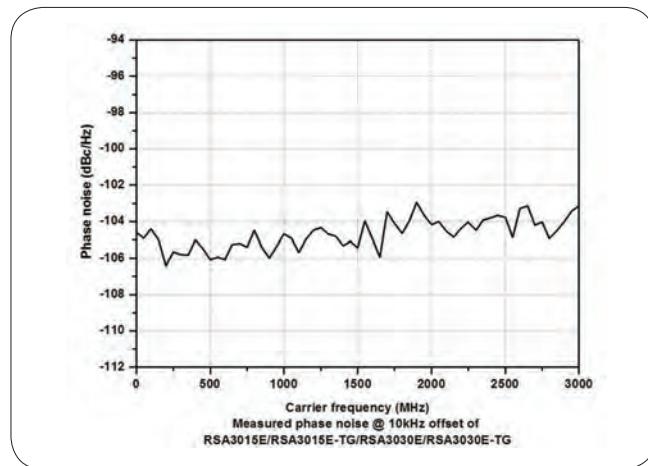


Residual FM	
	20°C to 30°C, RBW = VBW = 1 kHz
Residual FM	<10 Hz (nominal)
Bandwidth	
	Set "Sweep Time Rule" to "Accy"
Resolution Bandwidth (-3 dB) ^[1]	1 Hz to 3 MHz, in 1-3-10 sequence
RBW Accuracy	<5% (nominal)
Resolution Filter Shape Factor (60 dB: 3 dB)	<5 (nominal)
Video Bandwidth (-3 dB)	1 Hz to 10 MHz, in 1-3-10 sequence
Resolution Bandwidth (-6 dB) (Option RSA3000E-EMC)	200 Hz, 9 kHz, 120 kHz, 1 MHz

Note: [1] When the tracking generator is enabled or in zero span mode, the available range of RBW is from 1 kHz to 3 MHz.


Amplitude

Measurement Range	
Range	$f_c \geq 10 \text{ MHz}$ DANL to +30 dBm
Maximum Safe Input Level ^[1]	
DC Voltage	50 V
CW RF Power	+30 dBm, attenuation $\geq 40 \text{ dB}$, preamp off. -10 dBm, attenuation = 20 dB, preamp on.
Maximum Damage Level	
CW RF Power	+33 dBm (2 W)

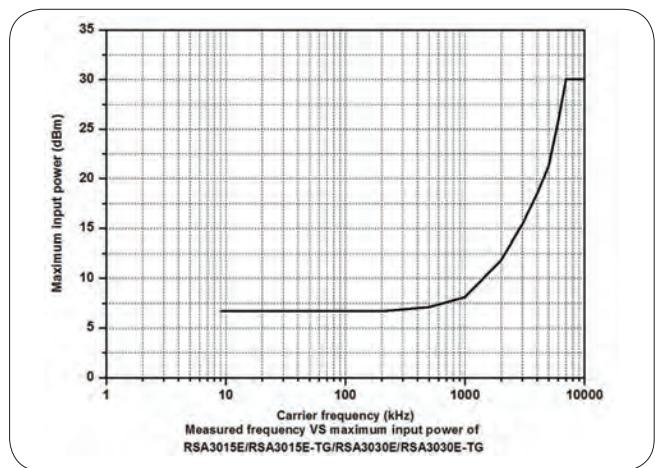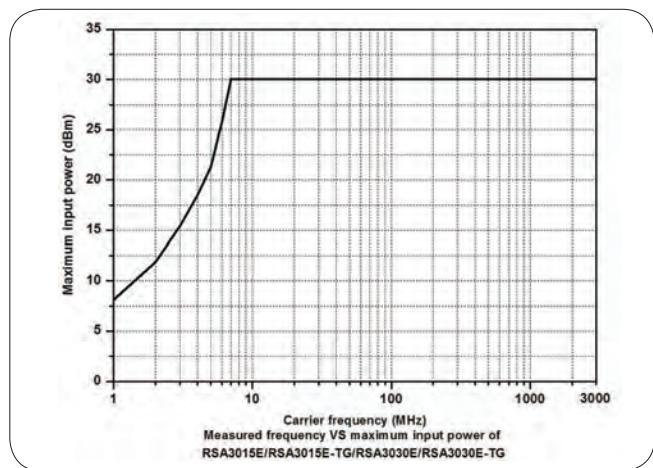



Displayed Average Noise Level (DANL)		
		attenuation = 0 dB, sample detector, trace averages ≥ 50 , tracking generator off, normalized to 1 Hz, 20°C to 30°C, input impedance = 50 Ω .
Preamp off	9 kHz to 100 kHz	<-120 dBm (typical)
	100 kHz to 20 MHz	<-135 dBm, <-140 dBm (typical)
	20 MHz to 1.5 GHz	<-138 dBm, <-141 dBm (typical)
	1.5 GHz to 3.0 GHz	<-136 dBm, <-141 dBm (typical)
Preamp on	100 kHz to 20 MHz	<-152 dBm, <-160 dBm (typical)
	20 MHz to 1.5 GHz	<-158 dBm, <-161 dBm (typical)
	1.5 GHz to 3.0 GHz	<-156 dBm, <-161 dBm (typical)

Note: [1] When $f_c < 10 \text{ MHz}$, the maximum safe input level is decreased.

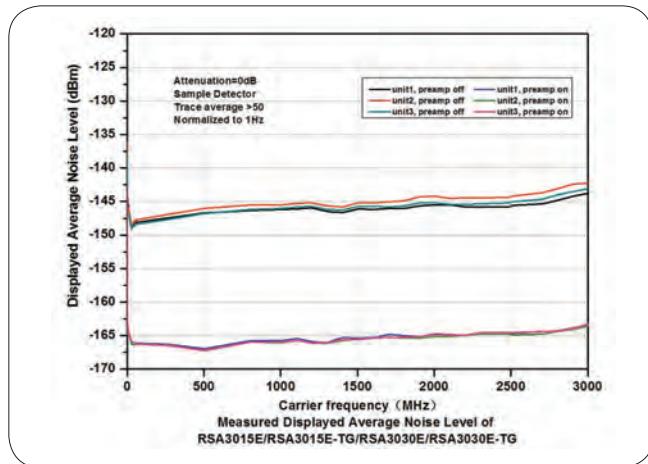



Level Display

Logarithmic Scale	1 dB to 200 dB
Linear Scale	0 to reference level
Number of Display Points	801
Number of Traces	6
Trace Detector	normal, pos-peak, neg-peak, sample, RMS average, voltage average, and quasi-peak (Option RSA3000E-EMC)
Trace Function	clear write, max hold, min hold, average, view, blank
Scale Unit	dBm, dBmV, dB μ V, nV, μ V, mV, V, nW, μ W, mW, W
Frequency Response	
	attenuation = 10 dB, relative to 50 MHz, 20°C to 30°C
Preamp off	100 kHz to 3.0 GHz
	<0.7 dB, <0.5 dB (typical)
	attenuation = 0 dB, relative to 50 MHz, 20°C to 30°C
Preamp on	100 kHz to 3.0 GHz
	<1.0 dB, <0.5 dB (typical)

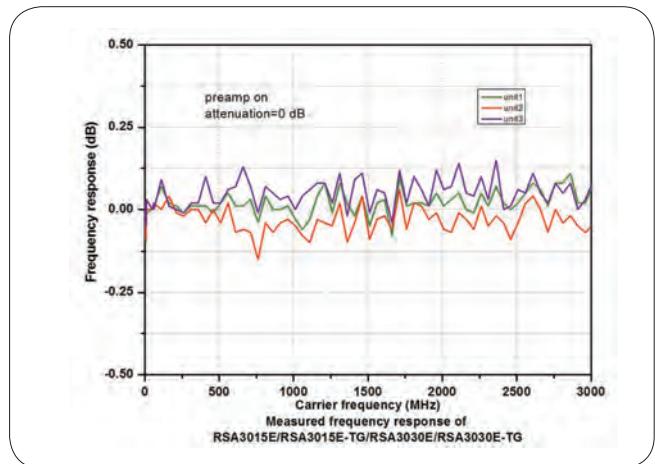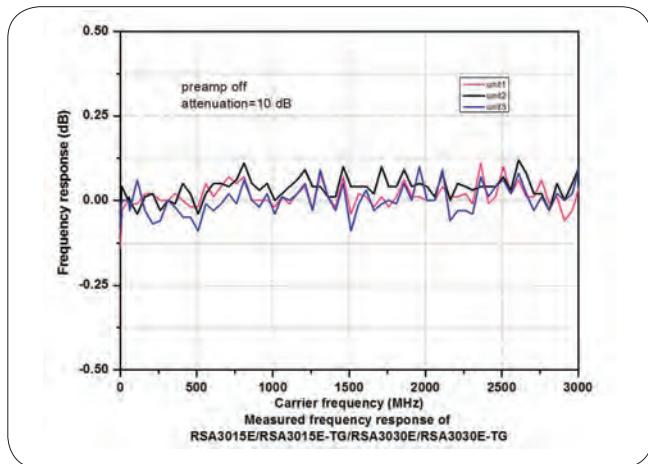

Input Attenuation Switching Uncertainty

Setting Range	0 dB to 50 dB, in 1 dB step
Switching Uncertainty	$f_c = 50$ MHz, relative to 10 dB, preamp off, 20°C to 30°C <0.3 dB

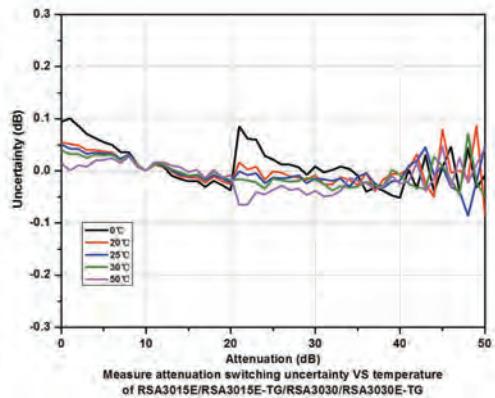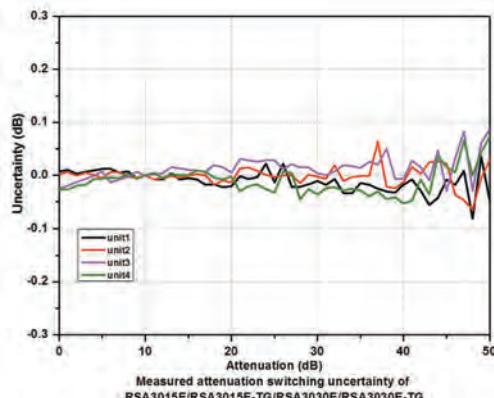

Absolute Amplitude Accuracy

Uncertainty	$f_c = 50$ MHz, peak detector, preamp off, attenuation = 10 dB, input signal level = -10 dBm, 20°C to 30°C <0.3 dB
-------------	---

Reference Level

Range	Logarithmic Scale	-170 dBm to +30 dBm, in 0.01 dB step
	Linear Scale	707 pV to 7.07 V, 0.11% (0.01 dB) resolution

RBW Switching


Uncertainty	Set "Sweep Time Rule" to "Accy", relative to 30 kHz RBW	
	1 Hz to 1 MHz	<0.1 dB
	3 MHz	<0.3 dB

Preamp (Option RSA3000E-PA)

Frequency Range	RSA3015E/RSA3015E-TG	100 kHz to 1.5 GHz
	RSA3030E/RSA3030E-TG	100 kHz to 3 GHz
Gain	20 dB (nominal)	


Level Measurement Uncertainty

	95% confidence level, S/N > 20 dB, RBW = VBW = 1 kHz, preamp off, attenuation = 10 dB, -50 dBm < input level ≤ 0 dBm, $f_c > 10$ MHz, 20°C to 30°C
Level Measurement Uncertainty	<1.0 dB (nominal)

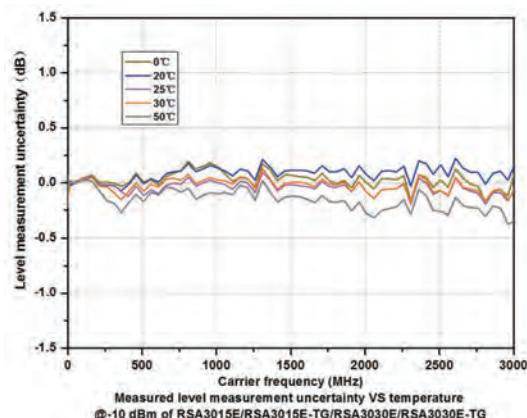


RF Input VSWR

	attenuation ≥ 10 dB, preamp off
VSWR	300 kHz to 3.0 GHz <1.6 (nominal)

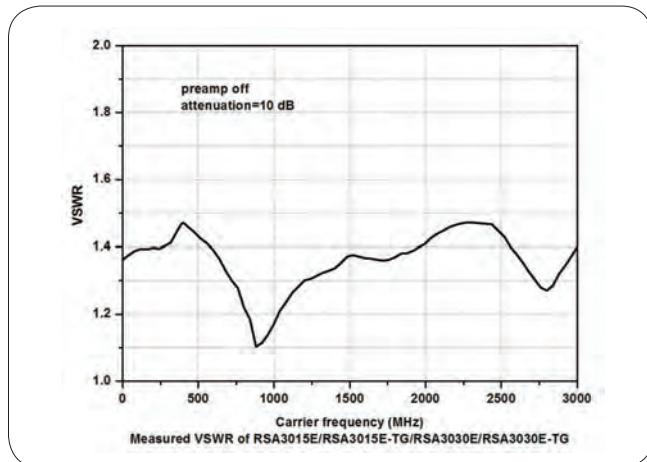

Distortion

Second Harmonic Intercept (SHI)	fc ≥ 50 MHz, input signal level = -20 dBm, attenuation = 0 dB, preamp off. +45 dBm
Third-order Intercept (TOI)	fc ≥ 50 MHz, two -20 dBm tones at input mixer spaced by 200 kHz, attenuation = 0 dB, preamp off. +10 dBm, +15 dBm (typical)
1 dB Gain Compression (P _{1dB}) ^[1]	fc ≥ 50 MHz, attenuation = 0 dB, preamp off 0 dBm (nominal)

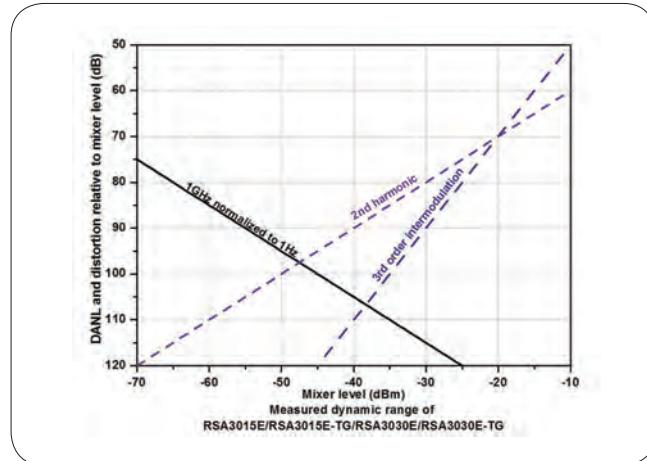

Spurious Response

Residual Response	input terminated with a 50 Ω load, attenuation = 0 dB, 20°C to 30°C <-90 dBm, <-100 dBm (typical)
Intermediate Frequency	<-60 dBc
System-related Sideband	referenced to local oscillators, referenced to A/D conversion, referenced to subharmonic of first LO, referenced to harmonic of first LO <-60 dBc
Input-related Spurious	mixer level = -30 dBm <-60 dBc

Note: [1] The frequency interval of the two-tone signals should be greater than 10 MHz.

Sweep



Sweep		
Sweep Time	span \geq 10 Hz	1 ms to 4,000 s
	zero span	1 μ s to 6,000 s
Sweep Time Uncertainty	span \geq 10 Hz, RBW \geq 1 kHz	5% (nominal)
	zero span (sweep time $>$ 1 ms)	5% (nominal)
Sweep Mode		continue, single

Trigger

Trigger		
Trigger Source		free run, external 1, external 2, video
Trigger Delay	span \geq 10 Hz	0 to 500 ms
	zero span	0 to 500 ms

Tracking Generator

Tracking Generator Output		
Frequency Range	RSA3015E-TG	100 kHz to 1.5 GHz
	RSA3030E-TG	100 kHz to 3.0 GHz
Output Level Range		-40 dBm to 0 dBm
Output Level Resolution		1 dB
Output Flatness	Relative to 50 MHz	
	± 3 dB (nominal)	
Function Supported		
Function Supported		VSWR measurement

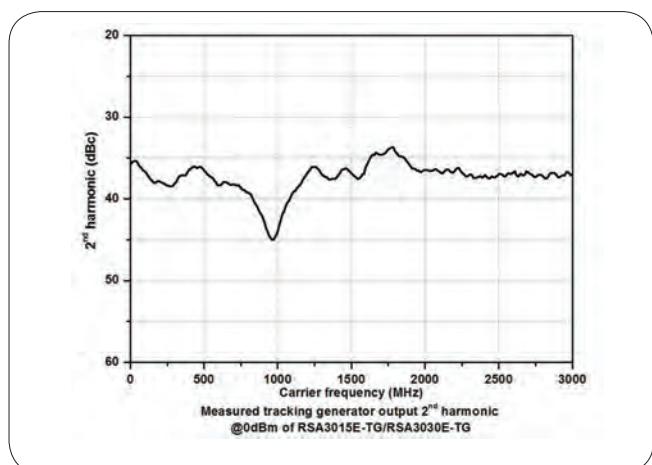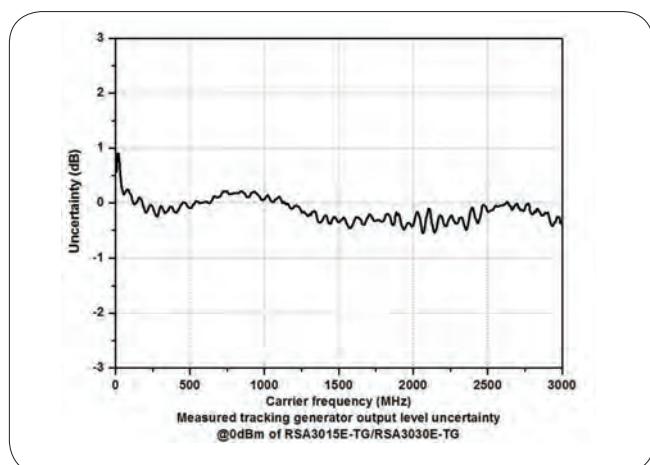

RTSA Mode

Real-time Analysis Bandwidth	10 MHz																
Min. Signal Duration for 100% POI at the Full-Scale Accuracy	maximum span, default Kaiser Window 9.3 μ s																
Trace Detector	pos-peak, neg-peak, sample, average																
Number of Traces	6																
Window Type	Hanning, Blackman-Harris, Rectangular, Flattop, Kaiser, and Gaussian																
Resolution Bandwidth	provides 6 RBWs for each window, except the Rectangular; for Kaiser window																
	Span	Min. bandwidth		Max. bandwidth													
	10 MHz	25.1 kHz		804 kHz													
	1 MHz	2.51 kHz		80.4 kHz													
	100 kHz	251 Hz		8.04 kHz													
Max. Sample Rate	12.8 Msa/s																
FFT Rate	146,484/s (nominal)																
Number of Markers	8																
Amplitude Resolution	0.01 dB																
Frequency Point	801																
Acquisition Time	Max. sample rate																
	>32 ms																
Min. Signal Duration for 100% POI at Different RBWs																	
Duration Time (μ s)																	
Span	RBW1	RBW2	RBW3	RBW4	RBW5	RBW6											
10 MHz	86.8	46.8	26.8	16.8	11.8	9.30											
1 MHz	807	407	207	107	56.3	31.3											
Amplitude																	
Amplitude Flatness	± 0.5 dB ^[1] (nominal)																
SFDR	<-50 dBc/Hz (typical)																
<i>UltraReal</i> Density																	
Probability Range	0 to 100% (with a step of 0.1%)																
Min. Span	5 kHz																
Persistence Duration	32 ms to 10 s																
<i>UltraReal</i> Spectrogram																	
History Depth	8,192																
Dynamic Range Covered by Bitmap Color	200 dB																
<i>UltraReal</i> PVT																	
Min. Acquisition Time	187.917 μ s																
Max. Acquisition Time	40 s																
Trigger																	
Trigger Source	free run, external 1, external 2, power(time), FMT																
<i>UltraReal</i> FMT																	
Trigger Diagram	density, spectrogram, normal, PVT																
Trigger Resolution	0.5 dB (nominal)																
Trigger Criteria	enter, leave, inside, outside, enter-leave, leave-enter																

Note:[1] Only applicable to the Normal measurement.

VSA Mode (Option RSA3000E-ASK/FSK)

Capture Oversampling					
Capture Oversampling	4, 8, 16				
Capture Length					
Capture Oversampling = 4	Maximum 4096				
Capture Oversampling = 8	Maximum 2048				
Capture Oversampling = 16	Maximum 1024				
Sample Rate					
Maximum Sample Rate	12.8 MHz				
Symbol Rate					
Symbol Rate	depends on capture oversampling = sample rate/capture oversampling, ≥ 1 kHz				
Usable I/Q Bandwidth					
Usable I/Q Bandwidth	symbol rate \times capture oversampling/1.28				
Trigger Mode					
Trigger Mode	free run, external1, external2, power (time), and FMT				
Modulation Format					
FSK	2FSK, 4FSK, and 8FSK				
ASK	2ASK and 4ASK				
Filter Type					
Measurement Filter Type	No Filter, RRC, Gaussian, Rectangular, and User Defined				
Reference Filter Type	Raised Cosine, RRC, Gaussian, Rectangular, and User Defined				
Measurement Uncertainty	Specifications apply under the following conditions: temperature from $+20$ °C to $+30$ °C signal level ≥ -25 dBm properly adjusted reference level offset between device's center frequency and signal's center frequency smaller than 5 % of symbol rate Random data sequence Capture oversampling is set to 4.				
Residual Error for FSK					
Test Signal	The reference filter is RRC with rolloff factor 0.22. The measurement filter is RRC with rolloff factor 0.22. The FSK reference deviation is a quarter of the symbol rate. The result length is 150 symbols. The center frequency is 1 GHz.				
Residual Frequency Error RMS					
Symbol Rate	<table border="1" style="width: 100%;"> <tr> <td>100 kHz</td><td>< 2.8% (nominal)</td></tr> <tr> <td>500 kHz</td><td>< 2.8% (nominal)</td></tr> </table>	100 kHz	< 2.8% (nominal)	500 kHz	< 2.8% (nominal)
100 kHz	< 2.8% (nominal)				
500 kHz	< 2.8% (nominal)				

EMI Mode (Option RSA3000E-EMI)

EMI Resolution Bandwidth	
Resolution Bandwidth (-3 dB)	100 Hz to 3 MHz, in 1-3-10 sequence
Resolution Bandwidth (-6 dB)	200 Hz, 9 kHz, 120 kHz and 1 MHz
EMI Detector	
Detector	pos-peak, neg-peak, average, quasi-peak, CISPR average, RMS average
EMI Key Feature	
Key Feature	CISPR 16-1-1 detectors CISPR 16-1-1 bandwidths log and linear display signal table scan table simultaneous detectors automatic limit testing measure at marker delta to limit step and swept scans report generation

General Specifications

Display		
Type		capacitive multi-touch screen
Resolution		1024 x 600 pixels
Size		10.1"
Color		24-bit color
Printer Supported		
Protocol		network printer
Mass Memory		
Mass Memory	Internal Storage	512 MB (nominal)
	External Storage	USB storage device (not supplied)
Power		
Input Voltage Range, AC		100 V to 240 V (nominal)
AC Frequency		45 Hz to 440 Hz
Power Consumption		55 W (typical), max. 90 W with all options
Environment		
Temperature	Operating Temperature Range	0°C to 50°C
	Storage Temperature Range	-20°C to 70°C
Humidity	0°C to 30°C	≤95% RH
	30°C to 40°C	≤75% RH
Altitude	Operating Height	below 3,048 m (10,000 feet)
Electromagnetic Compatibility and Safety		
EMC	complies with EMC Directive 2014/30/EU, complies with or above the standard specified in IEC61326-1:2013/EN61326-1:2013 Group 1 Class A	
	CISPR 11/EN 55011	
	IEC 61000-4-2:2008/EN 61000-4-2	±4.0 kV (contact discharge), ±8.0 kV (air discharge)
	IEC 61000-4-3:2002/EN 61000-4-3	3V/m (80 MHz to 1 GHz); 3V/m (1.4 GHz to 2 GHz); 1V/m (2.0 GHz to 2.7 GHz)
	IEC 61000-4-4:2004/EN 61000-4-4	1 kV power
	IEC 61000-4-5:2001/EN 61000-4-5	0.5 kV (phase-to-neutral voltage); 1 kV (phase-to-earth voltage); 1 kV (neutral-to-earth voltage)
	IEC 61000-4-6:2003/EN 61000-4-6	3 V, 0.15 to 80 MHz
	IEC 61000-4-11:2004/EN 61000-4-11	voltage dip: 0% UT during half cycle; 0% UT during 1 cycle; 70% UT during 25 cycles short interruption: 0% UT during 250 cycles
Safety		complies with IEC 61010-1:2010 (Third Edition)/EN 61010-1:2010, UL 61010-1:2012 R4.16 and CAN/CSA-C22.2 No. 61010-1-12+ GI1+ GI2
Environmental Stress		Samples of this product have been type tested in accordance with RIGOL's reliability test regulations and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, and vibration. The test methods are compliant with standards specified in GB/T6587 Class 2 and MILPRF-28800F Class 3.
Size		
(W x H x D)		410 mm x 224 mm x 135 mm (16.14" x 8.82" x 5.32")
Weight		
Without Tracking Generator		4.65 kg (10.25 lb)
With Tracking Generator		4.95 kg (10.91 lb)
Calibration Interval		
Recommended Calibration Interval		18 months

Input/Output

Front Panel Connector		
RF Input	Impedance	50 Ω (nominal)
	Connector	N-type female
TG Output	Impedance	50 Ω (nominal)
	Connector	N-type female
Internal/External Reference		
Internal Reference	Frequency	10 MHz
	Output Level	+3 dBm to +10 dBm, +7 dBm (typical)
	Impedance	50 Ω (nominal)
	Connector	BNC female
External Reference	Frequency	10 MHz ± 5 ppm
	Input Level	0 dBm to +10 dBm
	Impedance	50 Ω (nominal)
	Connector	BNC female
External Trigger Input/Output		
External Trigger Input 1	Impedance	≥1 kΩ (nominal)
	Connector	BNC female
	Level	5 V TTL level
External Trigger Input 2/Trigger Output	Impedance	on trigger input
		≥1 kΩ (nominal)
		on trigger output
	Connector	BNC female
	Level	5 V TTL level
IF Output		
IF Output	Frequency	430 MHz ± 20 MHz (nominal)
	RF input power (P_{RFin}) ≤ -10 dBm, attenuation = 0, preamp off.	
	Amplitude	50MHz, $P_{RFin} \pm 4$ dB (nominal) other frequency, $P_{RFin} \pm 4$ dB + RF frequency response (nominal)
	Impedance	50 Ω (nominal)
	Connector	SMB male
Communication Interface		
USB Host (4 ports)	Connector	A plug
	Protocol	version 2.0
USB Device	Connector	B plug
	Protocol	version 2.0
LAN	Connector	100/1000Base, RJ-45
	Protocol	LXI Core 2011 Device
HDMI	Connector	A plug
	Protocol	HDMI 1.4b

► Order Information

	Description	Order No.
Model	Real-time Spectrum Analyzer, 9 kHz to 1.5 GHz	RSA3015E
	Real-time Spectrum Analyzer, 9 kHz to 3 GHz	RSA3030E
	Real-time Spectrum Analyzer, 9 kHz to 1.5 GHz (with TG installed when leaving the factory)	RSA3015E-TG
	Real-time Spectrum Analyzer, 9 kHz to 3 GHz (with TG installed when leaving the factory)	RSA3030E-TG
Standard Accessories	Quick Guide (hard copy)	-
	Power Cord	-
Option	EMI Measurement Application (includes RSA3000E-EMC)	RSA3000E-EMI
	Preamplifier (PA)	RSA3000E-PA
	High Stability Clock	OCXO-C08
	Advanced Measurement Kit	RSA3000E-AMK
	EMC Filter and Quasi-Peak Detector Kit	RSA3000E-EMC
	Spectrum Analyzer PC Software	Ultra Spectrum
	ASK/FSK Demodulation Software	RSA3000E-ASK/FSK
Optional Accessories	Include: N-SMA cable, BNC-BNC cable, N-BNC adaptor, N-SMA adaptor, 75 Ω-50 Ω adaptor, 900 MHz/1.8 GHz antenna (2pcs), 2.4 GHz antenna (2pcs)	DSA Utility Kit
	Include: N(F)-N(F) adaptor (1pcs), N(M)-N(M) adaptor (1pcs), N(M)-SMA(F) adaptor (2pcs), N(M)-BNC(F) adaptor (2pcs), SMA(F)-SMA(F) adaptor (1pcs), SMA(M)-SMA(M) adaptor (1pcs), BNC T type adaptor (1pcs), 50 Ω SMA load (1pcs), 50 Ω BNC impedance adaptor (1pcs)	RF Adaptor Kit
	Include: 50 Ω to 75 Ω adaptor (2pcs)	RF CATV Kit
	Include: 6 dB attenuator (1pcs), 10 dB attenuator (2pcs)	RF Attenuator Kit
	30 dB high-power attenuator, with the max power of 100 W	ATT03301H
	N(M)-N(M) RF Cable	CB-NM-NM-75-L-12G
	N(M)-SMA(M) RF Cable	CB-NM-SMAM-75-L-12G
	VSWR Bridge, 1 MHz to 3.2 GHz	VB1032
	VSWR Bridge, 2 GHz to 8 GHz	VB1080
	Near-field Probe	NFP-3
	Rack Mount Kit	RM6041
	USB Cable	CB-USBA-USBB-FF-150

Warranty

Three years for the mainframe

HEADQUARTER

RIGOL TECHNOLOGIES, INC.
No.8 Keling Road, New District, Suzhou,
JiangSu, P.R.China
Tel: +86-400620002
Email: info@rigol.com

EUROPE

RIGOL TECHNOLOGIES EU GmbH
Lindbergh str. 4
82178 Puchheim
Germany
Tel: 0049-89/89418950
Email: info-europe@rigol.com

NORTH AMERICA

RIGOL TECHNOLOGIES, USA INC.
8140 SW Nimbus Ave.
Beaverton, OR 97008
Tel: 877-4-RIGOL-1
Fax: 877-4-RIGOL-1
Email: info@rigol.com

JAPAN

RIGOL TECHNOLOGIES JAPAN, LLC
MJ Bldg. 3F, 1-7-4 Minato, Chuou-ku,
Tokyo, Japan 104-0043
Tel: +81-3-6262-8932
Fax: +81-3-6262-8933
Email: info-japan@rigol.com

RIGOL® is the registered trademark of **RIGOL** Technologies, Inc. Product information in this document subject to update without notice. For the latest information about **RIGOL**'s products, applications and services, please contact local **RIGOL** office or access **RIGOL** official website: www.rigol.com