

146 Series

Chassis Mount Audio Transformers


146S

Features:

- Small, economical, open, two-hole horizontal bracket mount.
- Insulated and color-coded flexible leads 5" long minimum
- Frequency response 150 Hz. to 15 KHz. (+/- 1 dB, reference 1 KHz.)
- Weight: 1.3 oz.


Note: When operating at impedances below nominal, power capability and the frequency spectrum are proportionately lower, conversely, at higher impedances power capability and frequency spectrum will be proportionately higher.

SCHEMATIC

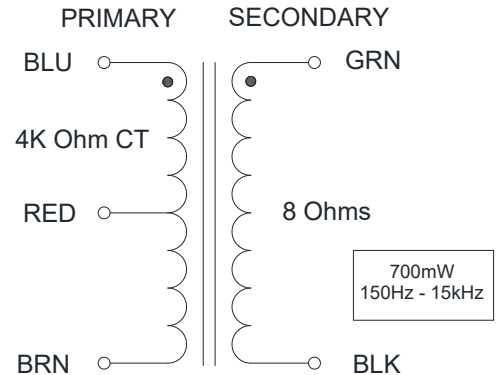


ELECTRICAL SPECIFICATIONS

Characteristics	Typical
Input Impedance	4K Ohms CT
Output Impedance	8 Ohms
Output Power	700 mW
DCR Blue-Brown	230 Ohms
DCR Black-Green	0.660 Ohms
Dielectric Strength	500V RMS
Temperature Range	-40 to 105 degC
Inductance Impedance	
@ 150 Hz, 5.0 V OC	
Blue-Brown	16.10H 18.40K Ohms
Leakage Inductance	
@ 150 Hz, 5.0 V SC	
Blue-Brown	29.7mH

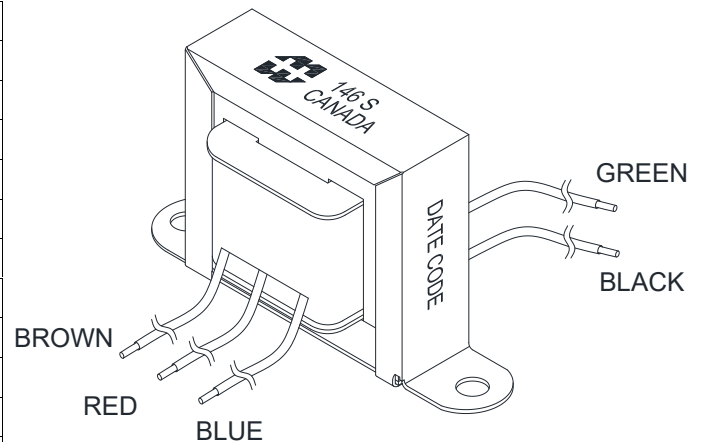


DIMENSIONAL DETAILS:

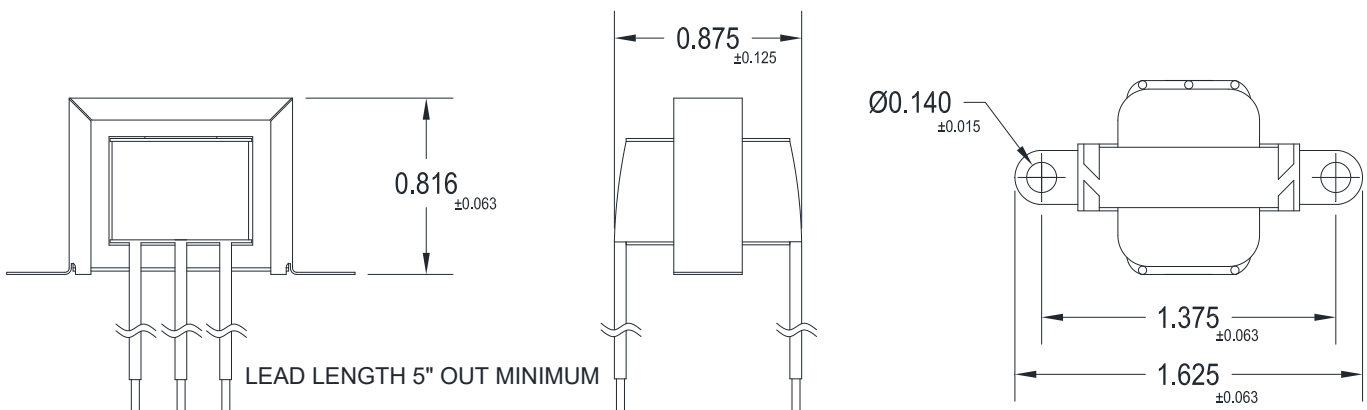

PERFORMANCE GRAPHS:


146S Frequency Response

RS = 4000 Ohm RL = 8 Ohm @ 1KHz Reference

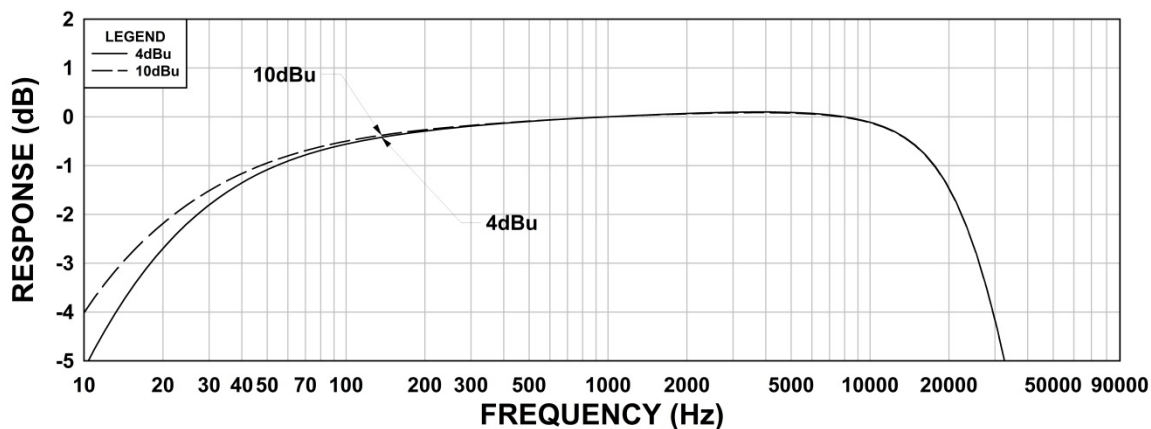


146S Phase Shift

RS = 4K Ohm RL = 8 Ohm @ 1KHz Reference

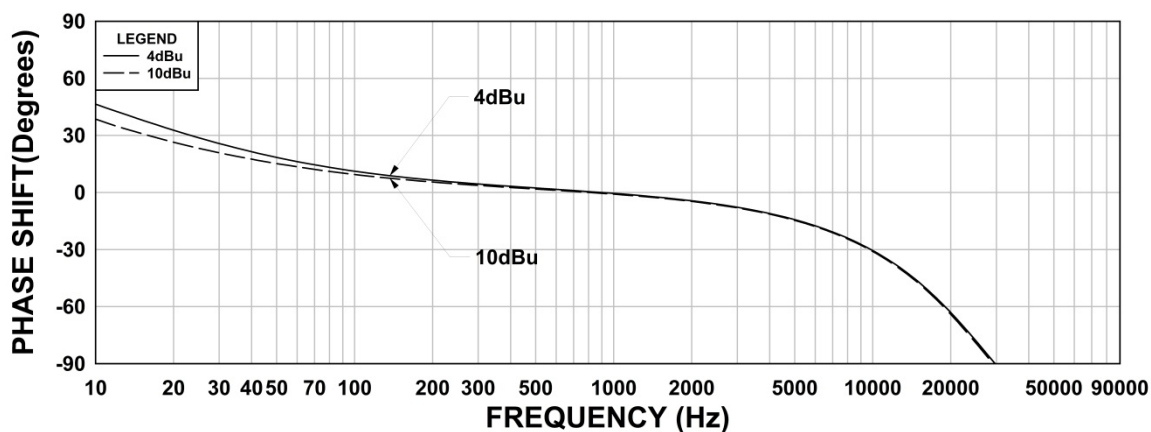

146S THD+N

RS = 4K Ohm RL = 8 Ohm @ 1KHz Reference

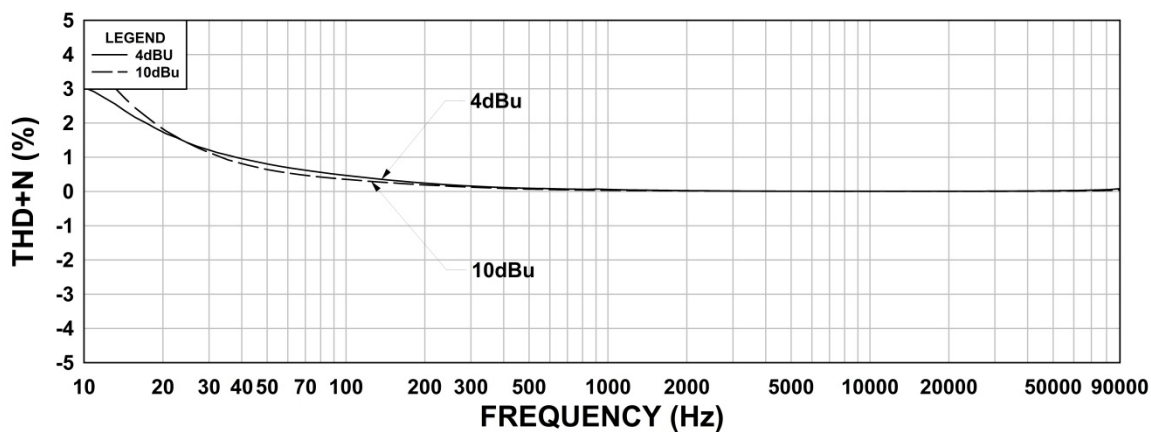

MEASUREMENT INSTRUMENTS

- dScope Series III Audio Analyzer
- Wayne Kerr 3255B with a 3265B Inductance Analyzer
- HP 4192a LF Impedance Analyzer
- Keithley 2010 DVM

**The results are typical and are subject to normal manufacturing and electrical tolerances.

TEST CONDITIONS

