



(NGE65I)



(NGE65E)



(NGE65U)


Energy Verified
Rendement
Énergétique Vérifié

(VI) IP21

IEC62368-1
IEC60601-1/1-1-11
IEC61558-1/2-16
IEC60335-1

BS EN/IEC62368-1
BS EN/IEC60601-1/1-11
BS EN/IEC61558-1/2-16
BS EN/IEC60335-1


■ Features

- MEAN WELL Patent Application Number: 202330347779.4
- Interchangeable AC plugs (I-Type)
- Global certificates in multi-fields
(ITE 62368-1, Medical 60601-1, Household 60335-1, Industrial 61558-1/2-16)
- 80~264Vac Universal AC input
- Ultra slim(30mm)
- No load power consumption< 0.075W
- Energy efficiency Level VI
- Class II power (no earth pin)
- Protections: Short circuit / Overload / Over voltage
- Pass LPS
- Extremely low leakage current <100uA
- 30°C~+70°C wide range working temperature
- Various DC plug quick adapter accessory available
(Plug kit sold separately, please refer to : https://www.meanwell.com/upload/pdf/DC_plug.pdf)
- 3 years warranty

■ Description

NGE65 is a highly reliable, 65W wall-mounted style single-output green adaptor series, which is compact and convenient for carry. This product is equipped with 7 types of interchangeable AC plug (European, USA, U.K., Australian, China, Korea and India type) that makes it very suitable for travel use. NGE65 is a Class II power unit (no FG), accepting the input range from 80VAC to 264VAC that it can satisfy the demands for various types of electrical devices.

With the working efficiency up to 92% and the extremely low no-load power consumption below 0.075W, NGE65 is compliant with the latest USA energy regulation EISA 2007/DoE, Canada NRCan, Australia and New Zealand MEPS, Korea KMEPS, EU ErP and CoC version 5. The supreme feature allows the adaptor to save the energy when it is under either the operating mode or the standby mode. The entire series is approved for ITE, medical, household and industrial appliance safety regulations; moreover, it adopts the 94V-0 flame retardant plastic case that it can effectively prevent users from electric hazard.

■ Model Encoding

NGE 65 I 12 -P1J

DC plug type { P1J:Plug for standard model, 2.1 φ × 5.5 φ × 11mm, C+ tuning fork type
Other options available by customer requested (see Page 6~7)

Output voltage (5V/9V/12V/15V/18V/24V/48V)

AC Plug { I : AC Pin fixed; Universal version with interchangeable plugs
E : AC Pin fixed; EU version with non-interchangeable plug
U : Foldable AC Pin; US version with non-interchangeable plug

Rated wattage

Series name

User's Manual



SPECIFICATION

ORDER NO.		NGE65○05-P1J	NGE65○09-P1J	NGE65○12-P1J	NGE65○15-P1J	NGE65○18-P1J	NGE65○24-P1J	NGE65○48-P1J						
		○ = I, U, E												
OUTPUT	DC VOLTAGE Note.2	5V	9V	12V	15V	18V	24V	48V						
	RATED CURRENT	6A	5.96A	4.88A	4.34A	3.62A	2.71A	1.36A						
	CURRENT RANGE	0 ~ 6A	0 ~ 5.96A	0 ~ 4.88A	0 ~ 4.34A	0 ~ 3.62A	0 ~ 2.71A	0 ~ 1.36A						
	RATED POWER	30W	53.6W	58.5W	65.1W	65.1W	65W	65.2W						
	ripple & noise (max.) Note.3	100mVp-p	100mVp-p	120mVp-p	150mVp-p	180mVp-p	240mVp-p	240mVp-p						
	VOLTAGE TOLERANCE Note.4	±6.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%						
	LINE REGULATION Note.5	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%						
	LOAD REGULATION Note.6	±6.0%	±5.0%	±3.0%	±3.0%	±3.0%	±2.0%	±2.0%						
SETUP, RISE, HOLD UP TIME		1500ms, 50ms, 30ms / 230VAC			3000ms, 50ms, 10ms / 115VAC at full load									
INPUT	VOLTAGE RANGE Note.7	80 ~ 264VAC	113 ~ 370VDC											
	FREQUENCY RANGE	47 ~ 63Hz												
	EFFICIENCY (Typ.)	84%	89%	90%	90%	91%	92%	92%						
	AC CURRENT	1.5A / 115VAC	0.8A / 230VAC											
	INRUSH CURRENT (max.)	COLD START 50A / 115VAC 100A / 230VAC												
LEAKAGE CURRENT (max.)		Touch current < 100uA (rms) @264VAC												
PROTECTION	OVERLOAD	110% ~ 150% rated output power												
		Protection type : 5~24V Hiccup mode, recovers automatically after fault condition is removed. 48V Shut down and latch off o/p voltage, re-power on to recover.												
	OVER VOLTAGE	110% ~ 140% rated output voltage												
ENVIRONMENT	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")												
	WORKING HUMIDITY	20% ~ 90% RH non-condensing												
	STORAGE TEMP., HUMIDITY	-20 ~ +85°C, 10 ~ 95% RH non-condensing												
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 40°C)												
VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes												
SAFETY & EMC (Note.8)	SAFETY STANDARDS	CB IEC62368-1, IEC60601-1/-1-11, IEC61558-1/-2-16, IEC60335-1; UL UL62368-1, CSA C22.2 NO. 62368-1, ANSI/AAMI ES60601-1/-1-11(3.2 Version), CAN/CSA-C22.2 NO.60601-1/-1-11; ANSI/AAMI ES60601-1-11, CAN/CSA-C22.2 NO.60601-1-11(for U Type only) DEKRA BS EN/EN62368-1, BS EN/EN60601-1/-1-11, BS EN/EN61558-1/-2-16, BS EN/EN60335-1; PSE J62368-1; BSMI CNS15958-1; RCM AS/NZS 61558-1/-2-16; EAC TPTC004; CCC GB4943.1 approved. KC KC62368-1; BIS IS13252(part1):2010/IEC60950-1:2005. (Please refer to next page for more details)												
		I/P-O/P:4000VAC												
		ISOLATION RESISTANCE I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH												
		EMC EMISSION	Parameter	Standard	Test Level / Note									
			Conducted emission	BS EN/EN55032(CISPR32)/EN55011 , FCC Part15 , CNS15936, GB/T 9254.1-2021, KC C9832	Class B									
			Radiated emission	BS EN/EN55032(CISPR32)/EN55011 , FCC Part15 , CNS15936, GB/T 9254.1-2021, KC C9832	Class B									
	EMC IMMUNITY	Harmonic current (Note.9)	BS EN/EN61000-3-2	Class A				Test Level / Note						
		Parameter	Standard	Test Level / Note										
		ESD	BS EN/EN61000-4-2	Level 3, 15KV air; Level 2, 8KV contact										
		RF field susceptibility	BS EN/EN61000-4-3	Level 2, 3V/m										
		EFT bursts	BS EN/EN61000-4-4	Level 3, 2KV										
		Surge susceptibility	BS EN/EN61000-4-5	Level 3, 1KV/L-N										
		Conducted susceptibility	BS EN/EN61000-4-6	Level 2, 3V										
DC OUTPUT CONNECTOR	MAIN BODY	Magnetic field immunity	BS EN/EN61000-4-8	Level 1, 1A/m										
		Voltage dips , interruption	BS EN/EN61000-4-11	>95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods										
OTHERS	MTBF	682.2 Khrs min. MIL-HDBK-217F (25°C) 5852.4 Khrs min. Telcordia TR/SR-332(Bellcore) (25°C)												
	DIMENSION	62*30*65mm (L*W*H)												
	PACKING	196g; 60pcs/ 13.4Kg / 0.94CUFT for NGE65lxz/Uxx-P1J	211g; 45pcs/ 11.4Kg / 1.06CUFT for NGE65Exx-P1J	Refer to Page 3										
DC OUTPUT CONNECTOR	PLUG	See page 6~7 ; Other type available by customer requested												
	CABLE	See page 6~7 ; Other type available by customer requested												
NOTE	1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient. 2.DC voltage: The output voltage set at point measure by plug terminal & 50% load. 3.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1 μF & 47 μF capacitor. 4.Tolerance: includes set up tolerance, line regulation, load regulation. 5.Line regulation is measured from low line to high line at rated load. 6.Load regulation is measured from 0% to 100% rated load. 7.Derating may be needed under low input voltage. Please check the derating curve for more details. 8.The power supply is considered as an independent unit, but the final equipment still need to re-confirmed that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on https://www.meanwell.com/Upload/PDF/EMI_statement_en.pdf) 9.Test harmonic current at 85% load. 10.Design meet US DoE Level VII (from Docket number EERE-2020-BT-STD-0006). ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx													

■ Interchangeable AC Plug Specifically for NGE12/18/30/45/65/90 (I-Type)

Order NO.	NGE65Ixx-P1J (Universal Version)							NGE65Exx-P1J (EU Version)	NGE65Uxx-P1J (US Version)
AC plug	Interchangeable Type (Unfoldable; AC Pin fixed)							Non-Interchangeable Type	
Certificate	EU	US	UK	AU	CN	KR	IN	Unfoldable AC Pin	Foldable AC Pin
	           	      							

■ AC Plugs Accessory (Sold Separately)

MW's order NO.	Per Unit	Per Bag	Per Carton	
		Q'Ty	Q'Ty	G.W.
AC PLUG-EU4		30 pcs	300 pcs (10 bags)	5.4Kg
AC PLUG-US4		30 pcs	300 pcs (10 bags)	4.7Kg
AC PLUG-UK4		30 pcs	300 pcs (10 bags)	7.1Kg
AC PLUG-AU4		30 pcs	300 pcs (10 bags)	5.2Kg
AC PLUG-CN4		30 pcs	300 pcs (10 bags)	4.8Kg
AC PLUG-KR4		30 pcs	300 pcs (10 bags)	6.3Kg
AC PLUG-IN4		30 pcs	300 pcs (10 bags)	7.7Kg
AC PLUG-MIX4	 (Per Set)	30 pcs (5 Types*6 mixed bags)	300 pcs (5 Types*6 mixed bags) (10 bags)	5.45Kg
AC PLUG-MIX5	 (Per Set)	35 pcs (7 Types*5 mixed bags)	315 pcs (7 Types*5 mixed bags) (9 bags)	6.13Kg


■ **Interchangeable AC Plug Installation Steps (Convertible with I Type only)**

Step1	Step2
	
Slide in AC converter along the guided rail between the metal prongs until it is locked in (with a "click" sound).	Check if the new plug type is stable and correct before use.


Note:

1. NGE65I main body unit and AC inlet plug should be ordered separately.
2. NGE65I needs to be used along with one of the AC inlet plug (EU,US,UK,AU,CN,KR,IN).

■ **Derating Curve**

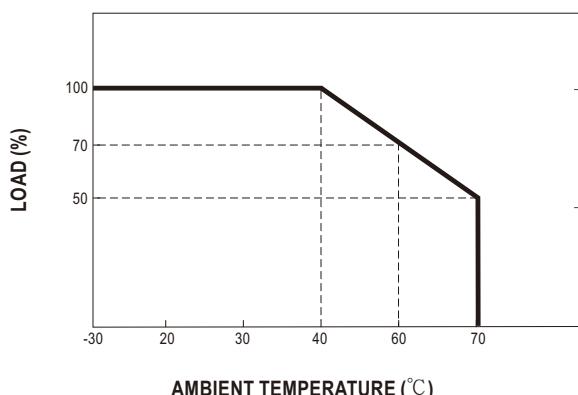

■ **Static Characteristics**

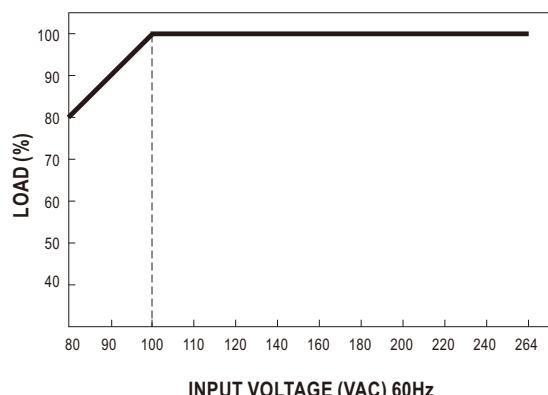


Mechanical Specification

(Unit: mm, tolerance $\pm 1\text{mm}$)


Case No.NGE65

※ Cable connection


NGE65Ixx-P1J (Universal Version - AC Pin fixed; With interchangeable plugs) :

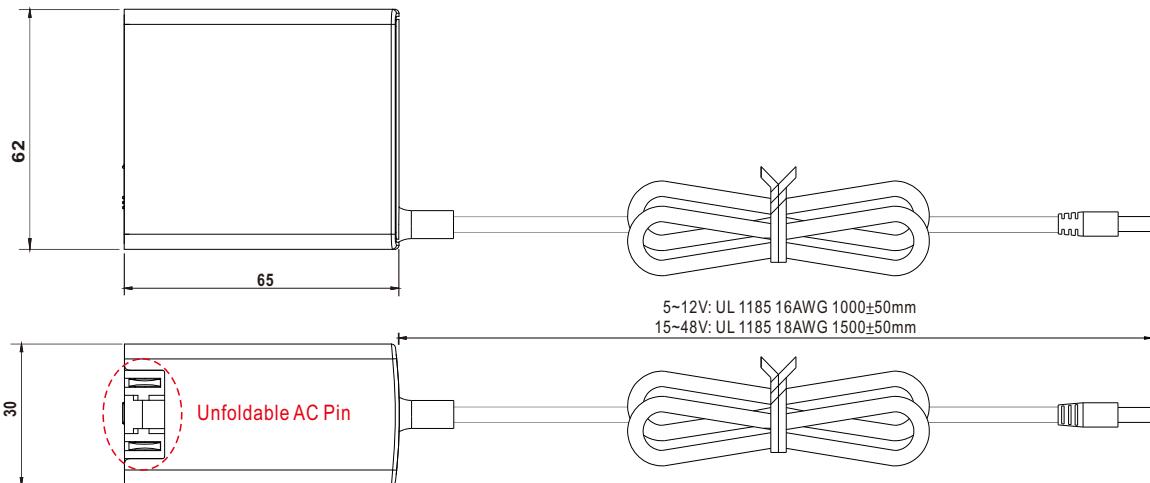

NGE65Exx-P1J (EU Version - AC Pin fixed; With non-interchangeable plug) :

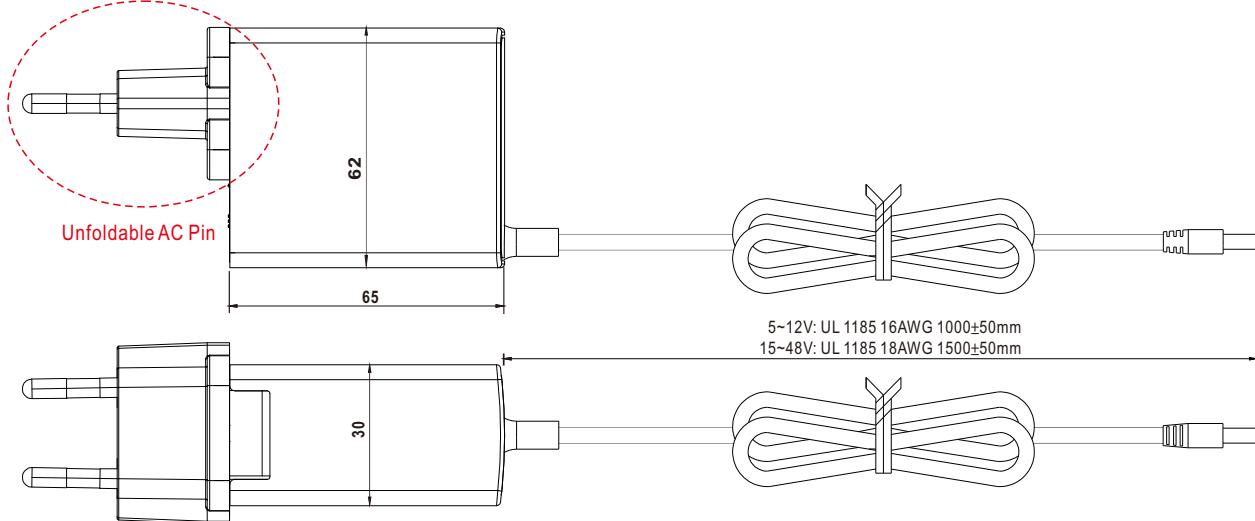

NGE65Uxx-P1J (US Version - Foldable AC Pin; With non-interchangeable plug) :

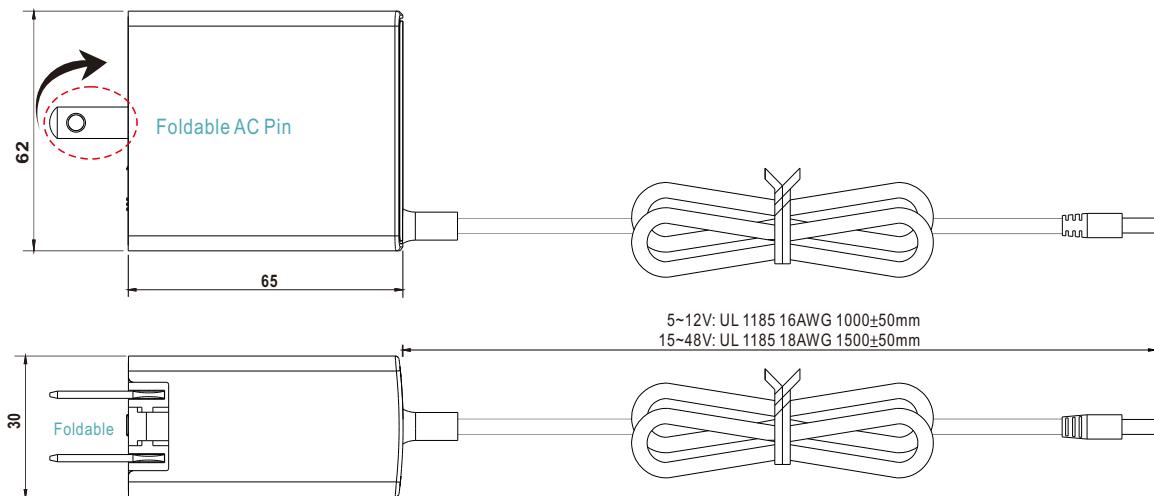

■ DC Output Plug

- ◎ Standard plug: P1J

Unit:mm

P1J	Pin Assignment
	
5.5 2.1 11±0.5mm	Outside \ominus \bullet \oplus Inside

- ◎ DC plug changeable through:

- (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
- (2) Quick adapter accessory (sold separately without MOQ)



Please refer to below table and online selection guide : https://www.meanwell.com/upload/pdf/DC_plug.pdf

Example quick adapter accessory:



- ◎ Optional DC plug: (Available in customized cable or quick adapter)

Tuning Fork Style	Type No.	A OD	B ID	C L	Quick Adapter Accessory
	P1I	5.5	2.1	9.5	Available (Current rating: 7.5A max.)
	P1L	5.5	2.5	9.5	
	P1M	5.5	2.5	11.0	
	P1IR	5.5	2.1	9.5	
	P1JR	5.5	2.1	11.0	
	P1LR	5.5	2.5	9.5	
	P1MR	5.5	2.5	11.0	
Barrel Style	Type No.	A OD	B ID	C L	None
	P2I	5.5	2.1	9.5	
	P2J	5.5	2.1	11.0	
	P2L	5.5	2.5	9.5	
	P2M	5.5	2.5	11.0	
	P2IR	5.5	2.1	9.5	
	P2JR	5.5	2.1	11.0	
	P2LR	5.5	2.5	9.5	
	P2MR	5.5	2.5	11.0	
Lock Style	Type No.	A OD	B ID	C L	None
	P2S(S761K)	5.53	2.03	12.06	
	P2K(761K)	5.53	2.54	12.06	
	P2C(S760K)	5.53	2.03	9.52	
	P2D(760K)	5.53	2.54	9.52	

Min. Pin Style	Type No.	A	B	C	Quick Adapter Accessory	
		OD	ID	L		
  EIAJ equivalent	P3A	2.35	0.7	11.0	Available (Current rating: 5A max.)	
	P3B	4.0	1.7	11.0		
	P3C	4.75	1.7	11.0		
Center Pin Style	Type No.	A	B	C	Available (Current rating: 7.5A max.)	
		OD	ID	L		
	P4A	5.5	3.4	11.0	1.0	
  EIAJ equivalent	P4B	6.5	4.4	11.0	1.4	
	P4C	7.4	5.1	11.0	0.6	
	Type No.	Pin Assignment				
Min. DIN 3 Pin with Lock (male)	Type No.	PIN No.		Output		Available (Current rating: 7.5A max.)
		1		+Vo		
		2		-Vo		
	R6B	3		+Vo		
Min. DIN 4 Pin with Lock (male)	Type No.	Pin Assignment				Available (Current rating: 7.5A max.)
		PIN No.		Output		
		1		+Vo		
	R7B	2		-Vo		
		3		-Vo		
		4		+Vo		
Stripped and tinned leads	Type No.	Pin Assignment				None
		PIN No.		Output		
		1		+Vo		
	by customer	1 (Ribbed)		+Vo		
		2 (Letter)		-Vo		
  Length of Land L1 by request (MW's standard length, L: <u>25</u> mm, L1: <u>10</u> mm)						

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>