

C1 P 01 - R 1 2 K □ - 0 D1

D1 : Plug-IN

□ : Button color

B : Blue
G : Green
O : Orange
R : Red
W : White
Y : Yellow

K : LED 24V AC/DC


2 : IP65

1 : Low bezel


01 : Full Voltage

CE cAU[®]us RoHS
Compliant

Bottom view





Electrical Diagram



Soldering/Plug-in Type Pushbutton Switch

Hole Dia

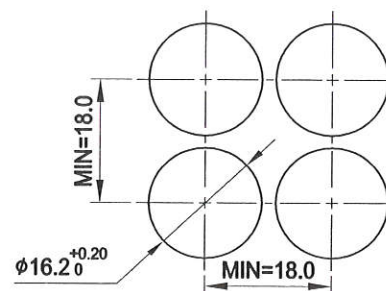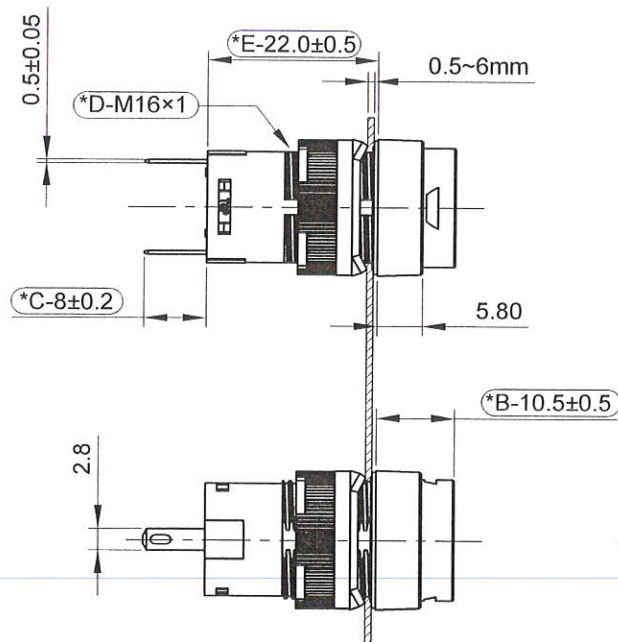

Product Specifications

Rated insulation voltage	:250 V
Lamp rating	:1 W
Insulation resistance	:100MΩ
Dielectric strenght	:1500V AC,1minute
Panel thickness	: 0.5mm~6mm
Degree of protection	: IP65
Storage temperature	: -30°C to +80°C
Operating temperature	: 25°C to +55°C



DECA [®] SwitchLab Inc.			PART NAME	UNIT	SCALE
DESIGN	CHECK	APPROVE	Pilot Light Switch	MM	1:1
DATE	DATE	DATE	Round 24 V AC/DC		
2021/02/01	2021/02/01	2021/02/01	DRAWING NO.		SHEET
			C1P01-R12 K □-0D1		1/1