
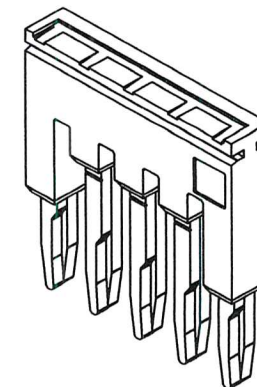


ODFBS□-3.5

□: Poles

RoHS
Compliant

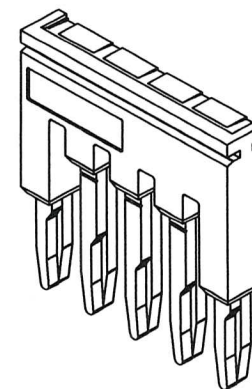

文件管制
NOV 26. 2015
文管中心

Continuous current 15A/15A
2-pole/multi-pole

Poles	2	3	4	5	10
L(mm)	5.75	9.25	12.75	16.25	33.75

NOTE: $L = (X - 1) * 3.5 + 2.25$

CONFIRMED & ACCEPTED BY

	Material	Plating/Finish	Remark
1	Insulating body PA66		RED
2	Terminal Copper	Tin plated	

DECA[®]SwitchLab Inc.

PART NAME

UNIT

SCALE

TERMINAL BLOCK JUMPER

MM

SHEET

DRAWING NO.

ODFBSx-3.5

⊕

1/1

DESIGN

DATE

2015/11/26

CHECK


DATE

2015/11/26

APPROVE

DATE

2015/11/26

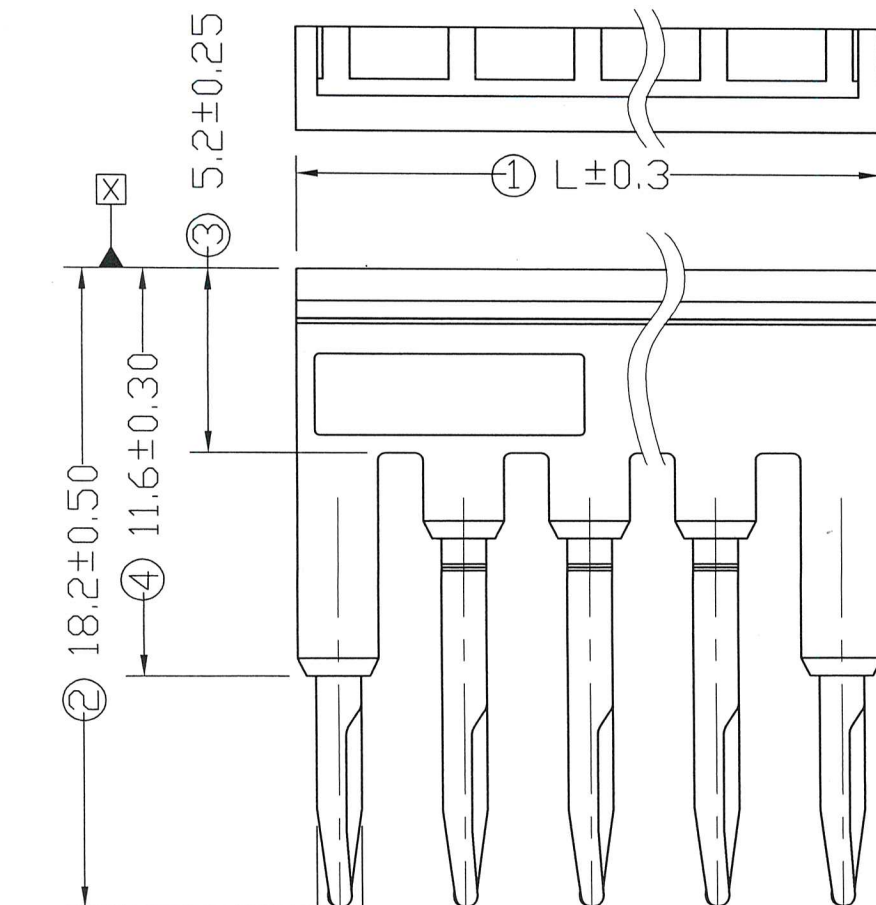

⑤ 1.25±0.08

3.5±0.20

$P = (X - 1) * 3.5$

$P \pm 0.20$

⑧ 1.6±0.10

⑥ $\varnothing 0.2 X$

A

REV.