
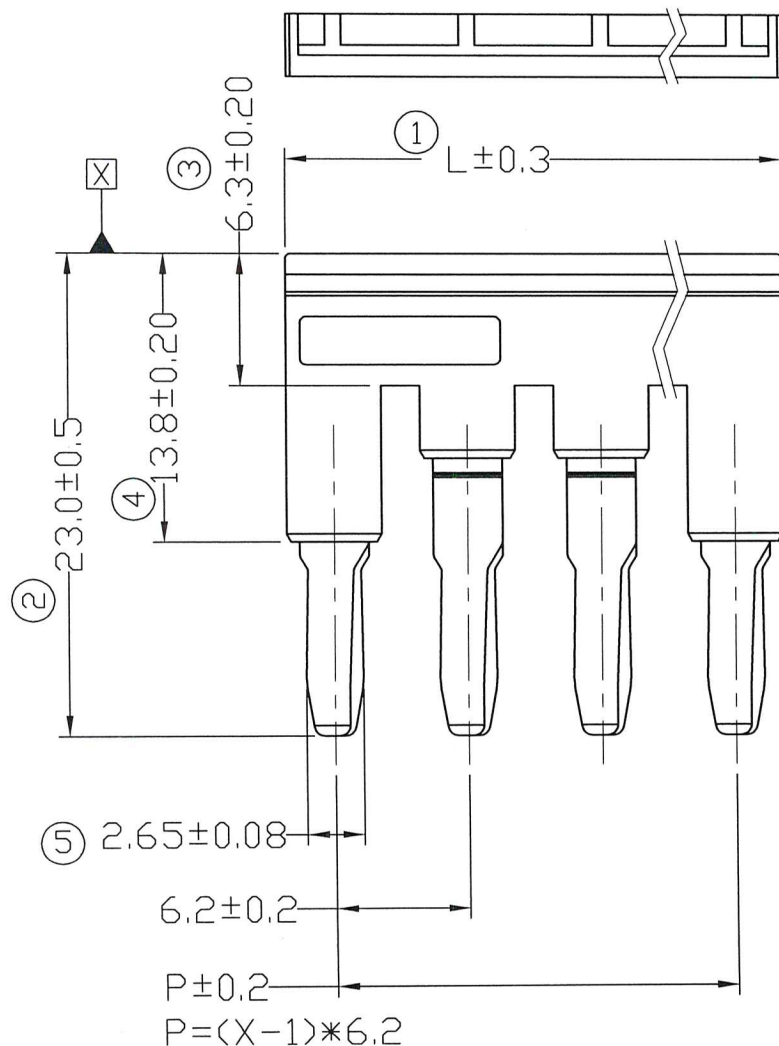


ODFBS □ -6

□ : Poles

RoHS
Compliant

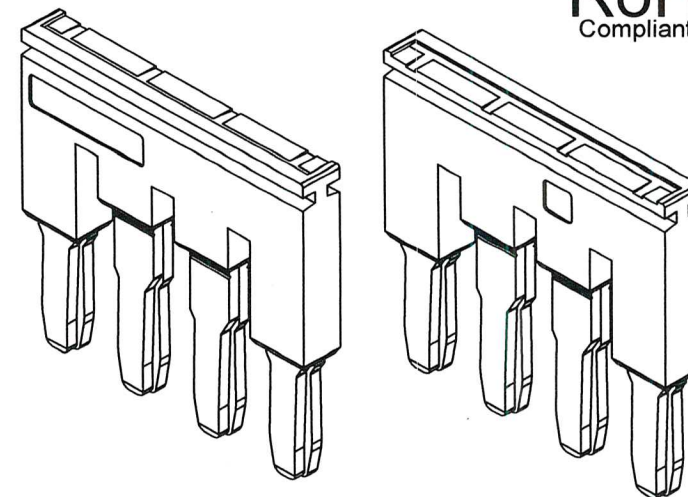

Continuous current 30A/30A
2-pole/multi-pole

Poles	2	3	4	5	10
L(mm)	10.6	16.8	23.0	29.2	60.2

NOTE: $L = (X-1) \times 6.2 + 4.4$

CONFIRMED & ACCEPTED BY

	Material	Plating/Finish	Remark
1	Insulating body	PA66	RED
2	Terminal	Copper	Tin plated



DECA [®] SwitchLab Inc.			PART NAME	UNIT	SCALE
DESIGN			TERMINAL BLOCK JUMPER	MM	
DATE			DRAWING NO.		SHEET
2015/11/26			ODFBSx-6		1/1