

Type No. :

F12S1-□214□FS1003

RoHS
Compliant

Mark — 003: Power

Direction function — 1: with fixed position

Material / Finish — S: Stainless Steel


□: LED Color

G: Green
R: Red
A: Amber
B: Blue
W: White


LED Voltage — 4:24V

□: Function
1: Momentary
2: Maintained

Electrical Diagram




Momentary




Maintained

Dimensions

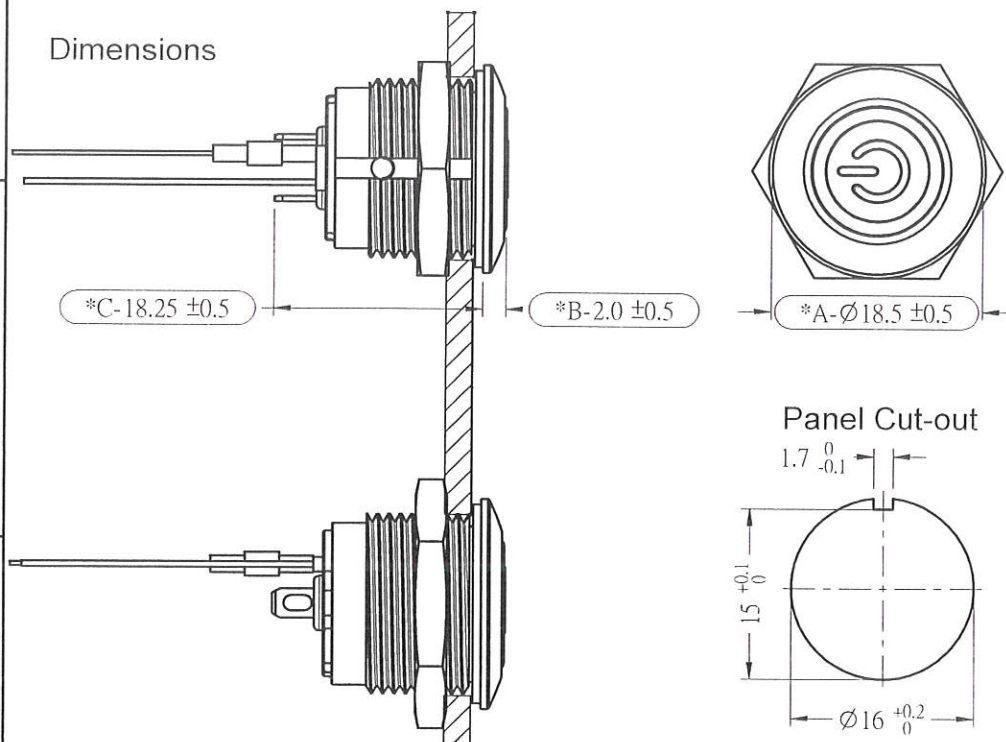

Panel Cut-out



Terminal : Solder
Mechanical lifetime : >50,000 operations
Electrical lifetime : >50,000 operations
Electric rating : 48V DC 100mA
Dielectric Strength : 1000V AC 60Hz 1min.
Insulation Resistance : 100MΩ
Panel thickness : 0.5mm~3mm
Degree of protection : IP67
Operating temperature : -25°C to 50°C
Contact resistance : 50mΩ (initial)



DECA® SwitchLab Inc.

PART NAME

F12S1-x214xFS1003

UNIT

MM

SCALE

DESIGN

CHECK

APPROVE

DATE

DATE

DATE

DRAWING NO.

F12S1-x214xFS1003

SHEET

1 / 1