

Features

- ♦ Plug-in module
- ♦ Easy to connect and replace in all MiBRX base modules
- ♦ Configured via Selpro software
- ♦ Spring fit terminals

Technical Specification

Input specifications


Digital Input

No. of Inputs	6
Input type	PNP
Input voltage	7-30V DC
Input current	5.5mA @ 24V, 7.5mA @ 30V
Response time	10 ms (Selectable through software via debounce parameters)
Maximum counting Frequency	Standard DI Mode -50Hz
Isolation between Inputs	2.5KV

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

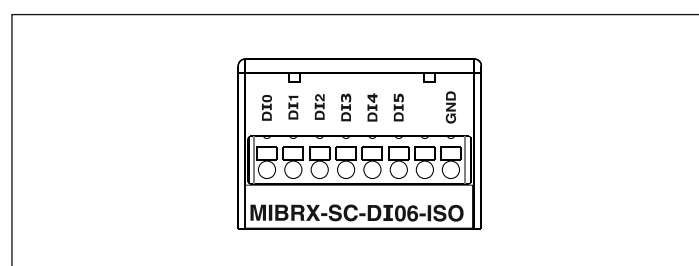

Ordering information

Product code	Description	Certification
MIBRX-SC-DI06-ISO	MiBRX Slot Card - 6 Digital Inputs (Isolated)	CE RoHS