



Features

- ♦ Plug-in module
- ♦ Easy to connect and replace in all MiBRX base modules
- ♦ Configured via Selpro software
- ♦ Spring fit terminals

Technical Specification

Output specifications


Transistor output

No. of outputs	4
Output type	PNP
Response time	10 ms (Selectable through software via debounce parameters)
Output current	100mA max per output
Isolation between outputs	4kV

General specifications

Ambient operating temperature	0°C to 55°C
Ambient storage temperature	-20°C to 70°C
Humidity	95%

Terminal connection

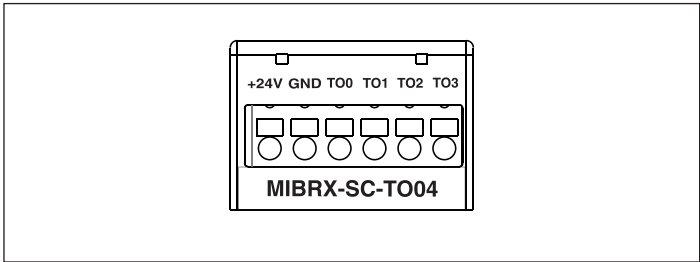

Ordering information

Product code	Description	Certification
MIBRX-SC-TO04	MiBRX Slot card - 4 Transistor outputs	CE RoHS